




# MMBD4148

## Surface Mount Switching Diode



Voltage Range  
75 Volts  
350m Watts Power Dissipation

### SOT-23

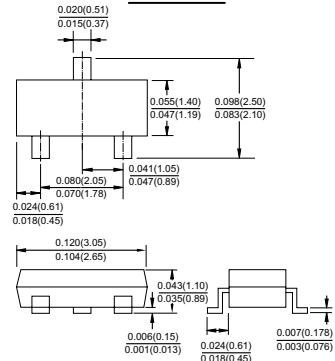

Dimensions in inches and (millimeters)

### Features

- ✧ Fast switching speed
- ✧ Surface mount package ideally suited for automatic insertion
- ✧ For general purpose switching applications
- ✧ High conductance

### Mechanical Data

- ✧ Case: SOT-23, Molded plastic
- ✧ Terminals: Solderable per MIL-STD-202, Method 208
- ✧ Polarity: See diagram
- ✧ Marking: KA6, KA2, K5D
- ✧ Weight: 0.008 gram (approx.)

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

#### Maximum Ratings

Type Number	Symbol	Value	Units
Non-Repetitive Peak Reverse Voltage	VRM	100	V
Peak Repetitive Reverse Voltage	VRRM	75	V
Working Peak Reverse Voltage	VRWM		
DC Blocking Voltage	VR		
RMS Reverse Voltage	VR(RMS)	53	V
Forward Continuous Current	IFM	300	mA
Average Rectifier Output Current	Io	200	mA
Non-Repetitive Peak Forward Surge Current @ t=1.0uS @ t=1.0S	IFSM	2.0 1.0	A
Power Dissipation (Note 1)	Pd	350	mW
Thermal Resistance Junction to Ambient Air	R θ JA	357	°C/W
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-65 to +150	°C

#### Electrical Characteristics

Type Number	Symbol	Min	Max	Units
Reverse Breakdown Voltage (Note 3) IR=100uA	V(BR)	75		V
Forward Voltage IF=1.0mA IF= 10mA IF = 50mA IF=150mA	VF		0.715 0.855 1.0 1.25	V
Peak Reverse Current (Note 3) VR=75V VR=75V, Tj=150°C VR=25V, Tj=150°C VR=20V	IR		1.0 50 30 25	uA nA
Junction Capacitance (Note 3) VR=0, f=1.0MHz	Cj		2.0	pF
Reverse Recovery Time (Note 2)	trr		4.0	nS

Notes: 1. Diode Mounted on Glass Epoxy PCB 1.6"x1.6"x0.06", Mounting pad for the Cathode Lead Min. 0.93 inches.

2. Reverse Recovery Test Conditions: IF=IR=10mA, Irr=0.1 x IR, RL=100 Ω.

3. Short Duration Test Pulse used to Minimize Self-Heating Effect.

## RATINGS AND CHARACTERISTIC CURVES (MMBD4148)

FIG.1- POWER DERATING CURVE

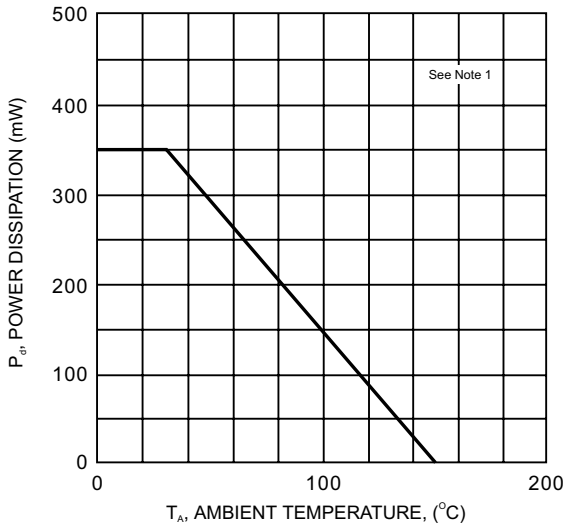


FIG.2- TYPICAL FWD CHARACTERISTICS


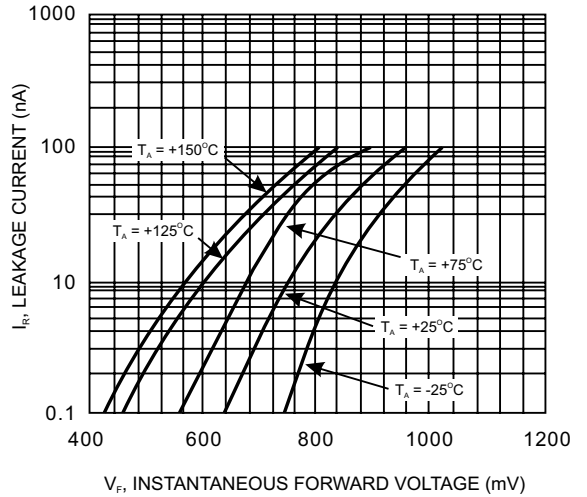


FIG.3- TYPICAL REVERSE CHARACTERISTICS



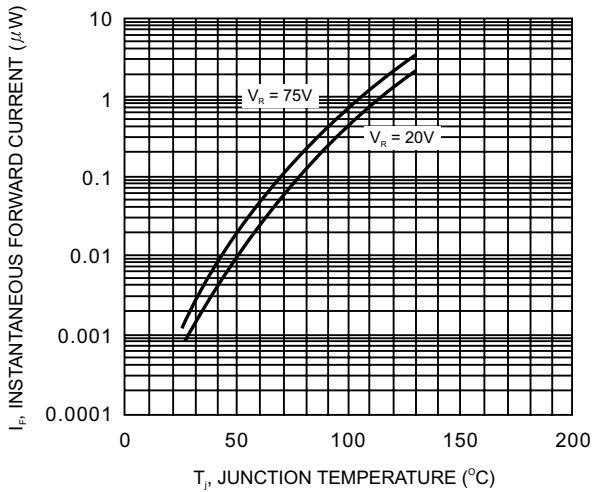

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.