



GBU401 THRU GBU407

Single Phase 4.0 AMPS. Glass Passivated Bridge Rectifiers



Voltage Range
50 to 1000 Volts
Current
4.0 Amperes


Features

- ✧ UL Recognized File # E-96005
- ✧ Ideal for printed circuit board
- ✧ Reliable low cost construction
- ✧ Plastic material has Underwriters Laboratory Flammability Classification 94V-0
- ✧ Surge overload rating to 150 amperes peak
- ✧ High temperature soldering guaranteed: 260°C / 10 seconds / .375" (9.5mm) lead lengths at 5 lbs., (2.3kg) tension

Mechanical Data

- ✧ Case: Molded plastic body
- ✧ Terminals: Leads solderable per MIL-STD-750, Method 2026
- ✧ Weight: 0.3 ounce, 8.0 grams
- ✧ Mounting torque: 5 in. lbs. Max.

GBU

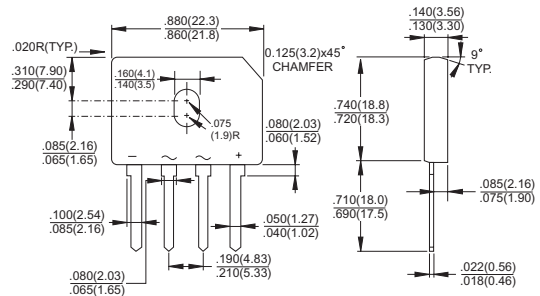

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	GBU 401	GBU 402	GBU 403	GBU 404	GBU 405	GBU 406	GBU 407	Units	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V	
Maximum Average Forward Rectified Current @ $T_C = 100^\circ\text{C}$	$I_{(AV)}$	4.0							A	
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	150							A	
Maximum Instantaneous Forward Voltage @ 4.0A	V_F	1.0							V	
Maximum DC Reverse Current @ $T_A = 25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A = 125^\circ\text{C}$	I_R	5.0 500							μA μA	
Typical Thermal Resistance (Note 1)	$R\theta_{JA}$	20							$^\circ\text{C}/\text{W}$	
(Note 2)	$R\theta_{JC}$	4.0								
Typical Junction Capacitance (Note 3)	C_j	100				45				pF
Operating Temperature Range	T_J	-55 to +150							$^\circ\text{C}$	
Storage Temperature Range	T_{STG}	-55 to +150							$^\circ\text{C}$	

Notes: 1. Mounted on P.C.B. with 0.5 x 0.5" (12 x 12mm) Copper Pads and 0.375" 9.5mm) Lead Length.

2. Mounted on Al. Plate of 2" x 3" x 0.25"

3. Measured at 1.0MHZ and Applied Reverse Voltage of 4.0 Volts.

RATINGS AND CHARACTERISTIC CURVES (GBU401 THRU GBU407)

FIG.1- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMENT

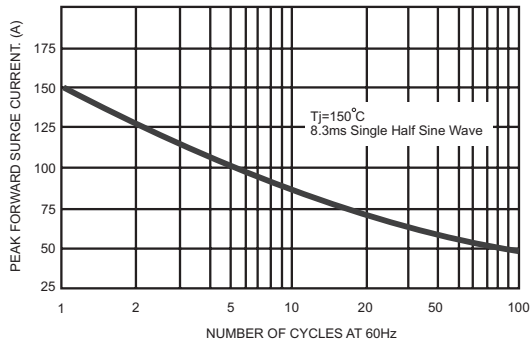


FIG.2-MAXIMUM FORWARD CURRENT DERATING CURVE

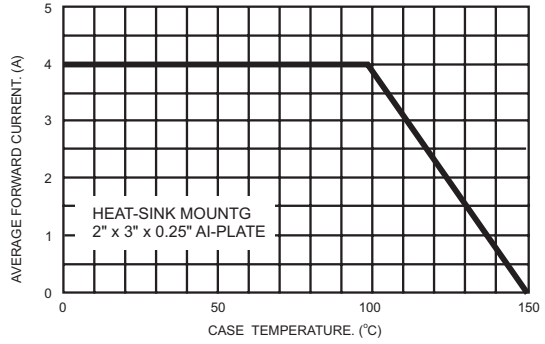


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER BRIDGE ELEMENT


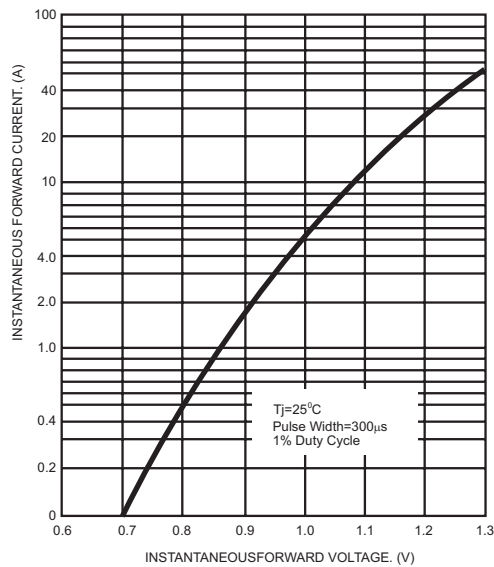


FIG.4- TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT



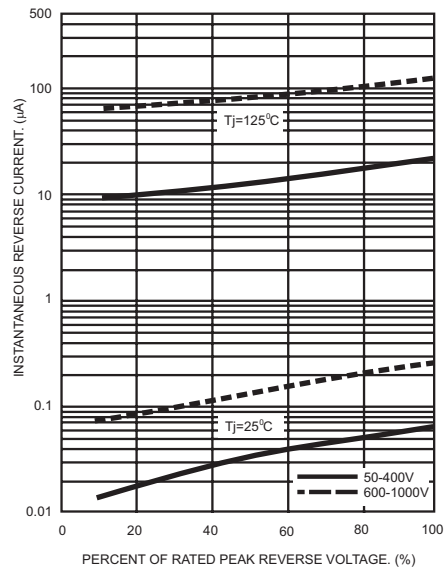

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.