



# GBU801 THRU GBU807

Single Phase 8.0 AMPS. Glass Passivated Bridge Rectifiers



Voltage Range  
50 to 1000 Volts  
Current  
8.0 Amperes


## Features

- ✧ UL Recognized File # E-96005
- ✧ Ideal for printed circuit board
- ✧ Reliable low cost construction
- ✧ Plastic material has Underwriters Laboratory Flammability Classification 94V-0
- ✧ Surge overload rating to 200 amperes peak
- ✧ High temperature soldering guaranteed: 260°C / 10 seconds / .375", (9.5mm) lead lengths.

## Mechanical Data

- ✧ Case: Molded plastic body.
- ✧ Terminals: Plated leads solderable per MIL-STD-750, Method 2026.
- ✧ Weight: 0.3 ounce, 8.0 grams
- ✧ Mounting torque: 5 in. lb. Max.

## GBU

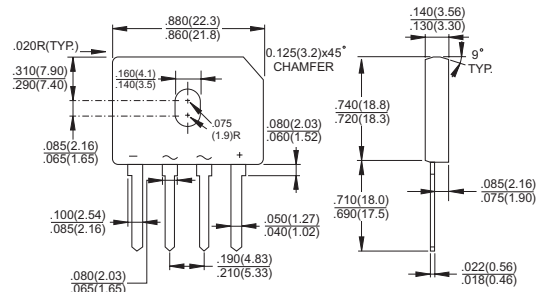

Dimensions in inches and (millimeters)

## Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	GBU 801	GBU 802	GBU 803	GBU 804	GBU 805	GBU 806	GBU 807	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ $T_c = 100^\circ\text{C}$	$I_{(AV)}$	8.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method )	$I_{FSM}$	200							A
Maximum Instantaneous Forward Voltage @ 8.0A	$V_F$	1.0							V
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=125^\circ\text{C}$	$I_R$	5.0 500							$\mu\text{A}$ $\mu\text{A}$
Rating for fusing ( $t < 8.3\text{ms}$ )	$I^2t$	166							$\text{A}^2\text{sec}$
Typical Thermal Resistance Per Leg (Note 1) (Note 2)	$R_{\theta JA}$ $R_{\theta JC}$	21.0 2.0							$^\circ\text{C}/\text{W}$
Typical Junction Capacitance (Note 3)	$C_j$	211				94			pF
Operating Temperature Range	$T_J$	-55 to +150							$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-55 to +150							$^\circ\text{C}$

Notes 1: Units Mounted In Free Air No Heat Sink On PCB 0.5x0.5 " (12x12mm) Copper Pads, 0.375"(9.5mm) Lead Length.


2: Units Case Mounted On 4" x 6" x 0.25" AL. Plate Heat Sink.

3. Measured at 1.0 MHZ and applied Reverse Voltage of 4.0V.




## RATINGS AND CHARACTERISTIC CURVES (GBU801 THRU GBU807)


**FIG.1- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMENT**

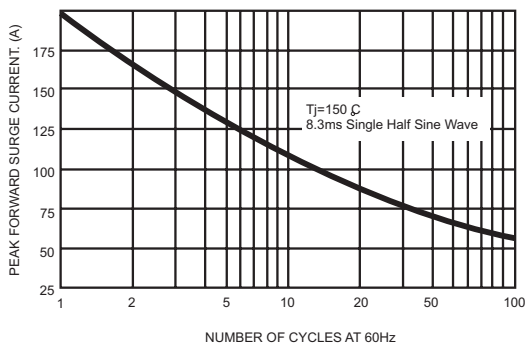


**FIG.2-MAXIMUM FORWARD CURRENT DERATING CURVE**

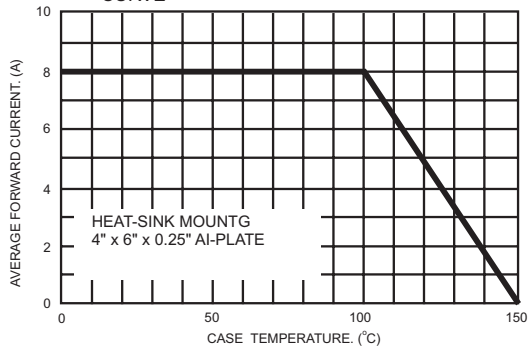

**FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER BRIDGE ELEMENT**

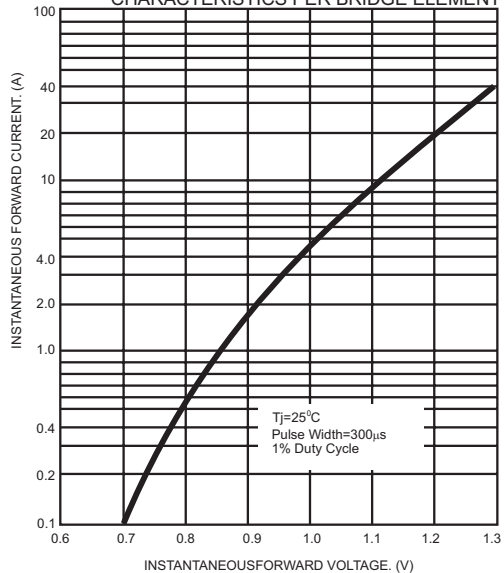

**FIG.4- TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT**

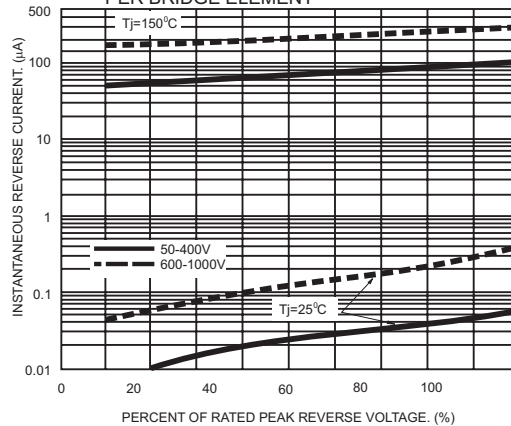



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.