


### Features

- Glass Passivated Die Construction
- High Case Dielectric Strength of 1500V<sub>RMS</sub>
- Low Reverse Leakage Current
- Surge Overload Rating to 240A Peak
- Ideal for Printed Circuit Board Applications

### Mechanical Data

- Case: Molded Plastic
- Plastic Material - UL Flammability Classification 94V-0
- UL Listed Under Recognized Component Index, File Number E94661
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Plated Leads, Solderable per MIL-STD-202, Method 208
- Polarity: Molded on Body
- Mounting: Through Hole for #6 Screw
- Mounting Torque: 5.0 in-lbs Maximum
- Weight: 6.6 grams (approx)
- Marking: Type Number

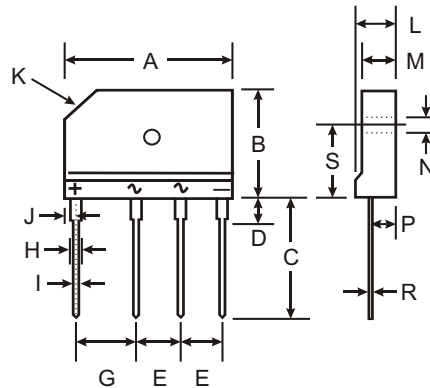

| GBJ                  |           |       |
|----------------------|-----------|-------|
| Dim                  | Min       | Max   |
| A                    | 29.70     | 30.30 |
| B                    | 19.70     | 20.30 |
| C                    | 17.00     | 18.00 |
| D                    | 3.80      | 4.20  |
| E                    | 7.30      | 7.70  |
| G                    | 9.80      | 10.20 |
| H                    | 2.00      | 2.40  |
| I                    | 0.90      | 1.10  |
| J                    | 2.30      | 2.70  |
| K                    | 3.0 X 45° |       |
| L                    | 4.40      | 4.80  |
| M                    | 3.40      | 3.80  |
| N                    | 3.10      | 3.40  |
| P                    | 2.50      | 2.90  |
| R                    | 0.60      | 0.80  |
| S                    | 10.80     | 11.20 |
| All Dimensions in mm |           |       |

### Maximum Ratings and Electrical Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified

Single phase, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

| Characteristic  | Symbol   | GBJ 20005   | GBJ 2001 | GBJ 2002 | GBJ 2004 | GBJ 2006 | GBJ 2008 | GBJ 2010 | Unit             |
|---|--|-------------|----------|----------|----------|----------|----------|----------|------------------|
| Peak Repetitive Reverse Voltage<br>Working Peak Reverse Voltage<br>DC Blocking Voltage                            | V <sub>RRM</sub><br>V <sub>RWM</sub><br>V <sub>R</sub> | 50          | 100      | 200      | 400      | 600      | 800      | 1000     | V                |
| RMS Reverse Voltage   | V <sub>R(RMS)</sub>                                    | 35          | 70       | 140      | 280      | 420      | 560      | 700      | V                |
| Average Forward Rectified Output Current @ T <sub>C</sub> = 110°C   | I <sub>O</sub>   | 20          |          |          |          |          |          |          | A                |
| Non-Repetitive Peak Forward Surge Current, 8.3 ms single half-sine-wave superimposed on rated load (JEDEC method) | I <sub>FSM</sub>                                       | 240         |          |          |          |          |          |          | A                |
| Forward Voltage per element @ I <sub>F</sub> = 10A  | V <sub>FM</sub>  | 1.05        |          |          |          |          |          |          | V                |
| Peak Reverse Current @ T <sub>A</sub> = 25°C<br>at Rated DC Blocking Voltage @ T <sub>C</sub> = 125°C             | I <sub>R</sub>   | 10<br>500   |          |          |          |          |          |          | μA               |
| I <sup>2</sup> t Rating for Fusing (t < 8.3 ms) (Note 1)  | I <sup>2</sup> t                                       | 240         |          |          |          |          |          |          | A <sup>2</sup> s |
| Typical Total Capacitance per Element (Note 2)  | C <sub>T</sub>   | 60          |          |          |          |          |          |          | pF               |
| Typical Thermal Resistance Junction to Case (Note 3)  | R <sub>θJC</sub>                                       | 0.8         |          |          |          |          |          |          | °C/W             |
| Operating and Storage Temperature Range   | T <sub>J</sub> , T <sub>STG</sub>                      | -55 to +150 |          |          |          |          |          |          | °C               |

- Notes:
1. Non-repetitive, for t > 1ms and < 8.3 ms.
  2. Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.
  3. Unit mounted on 300 x 300 x 1.6mm Cu plate heat sink.

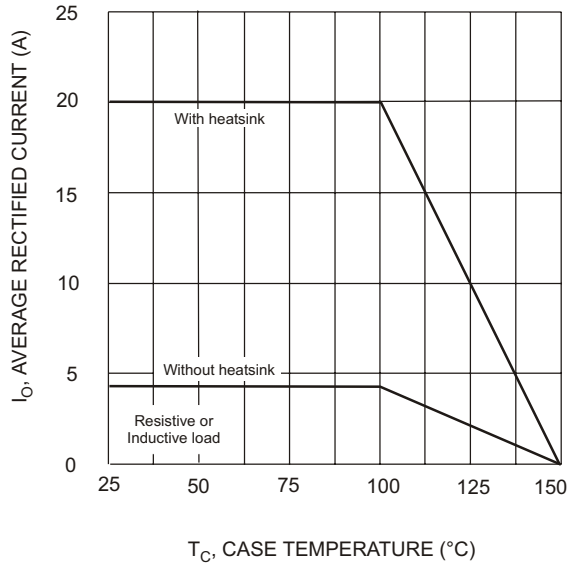


Fig. 1 Forward Current Derating Curve

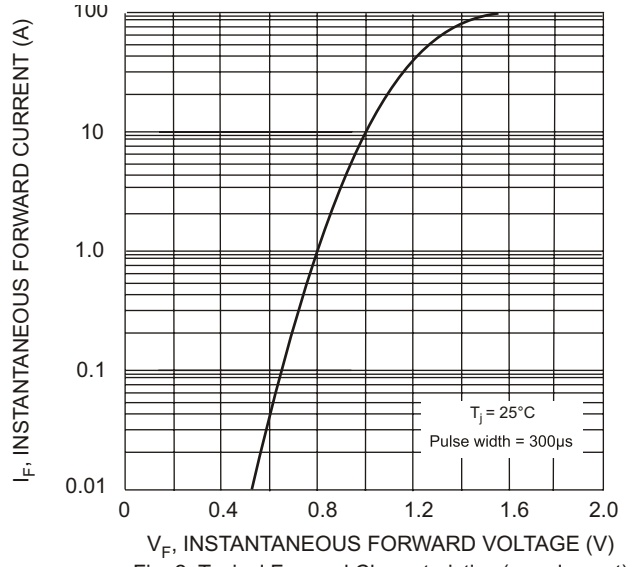


Fig. 2 Typical Forward Characteristics (per element)

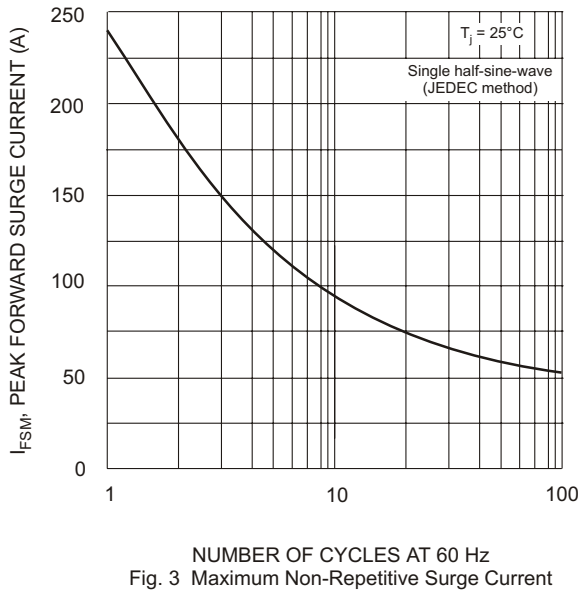


Fig. 3 Maximum Non-Repetitive Surge Current

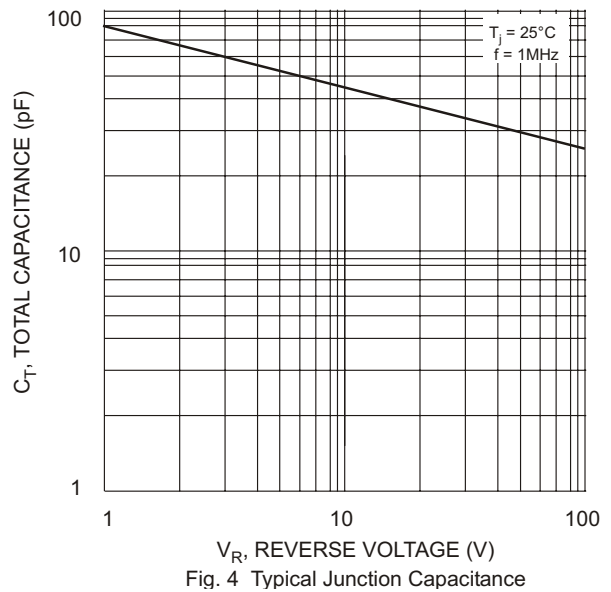


Fig. 4 Typical Junction Capacitance

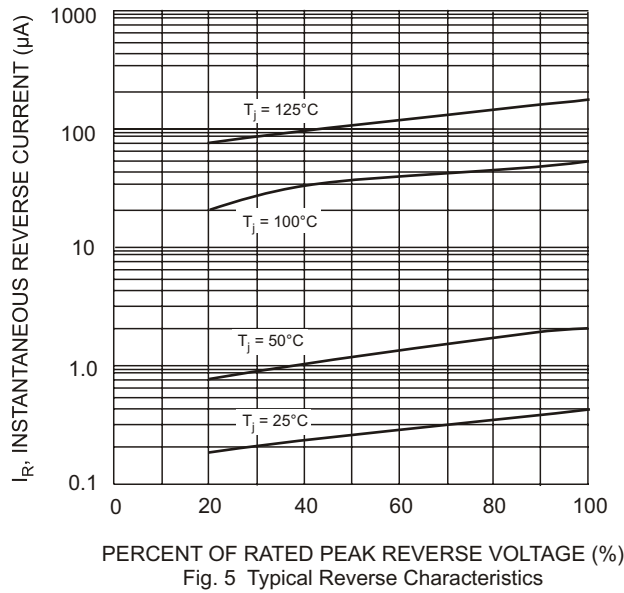


Fig. 5 Typical Reverse Characteristics



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.