

COMPLEMENTARY MEDIUM-POWER HIGH VOLTAGE POWER TRANSISTORS

... designed for high-speed switching and linear amplifier application for high-voltage operational amplifiers, switching regulators, convertors, deflection stages and high fidelity amplifiers.

FEATURES:


- * Continuous Collector Current - $I_C = 2 \text{ A}$
- * Power Dissipation - $P_D = 35 \text{ W}$ @ $T_C = 25^\circ\text{C}$
- * $V_{CE(SAT)} = 0.75 \text{ V (Max.)}$ @ $I_C = 1.0 \text{ A}$, $I_B = 125 \text{ mA}$

NPN	PNP
2N3583	2N6420
2N3584	2N6421
2N3585	2N6422
2N4240	2N6423


1.0 AND 2.0 AMPERE
POWER TRANSISTOR
COMPLEMENTARY SILICON
175-300 VOLTS
35 WATTS

MAXIMUM RATINGS

Characteristic	Symbol	2N3583 2N6420	2N3584 2N6421	2N3585 2N6422	2N4240 2N6423	Unit
Collector-Emitter Voltage	V_{CEO}	175	250	300	300	V
Collector-Base Voltage	V_{CBO}	250	375	500	500	V
Emitter-Base Voltage	V_{EBO}	6				V
Collector Current-Continuous Peak	I_C	1.0 5.0	2.0 5.0			A
Base Current	I_B	1.0				A
Total Power Dissipation @ $T_C=25^\circ\text{C}$ Derate above 25°C	P_D	35 0.2				W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +200				$^\circ\text{C}$




TO-66



PIN 1.BASE
2.EMITTER
COLLECTOR (CASE)

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	5.0	$^\circ\text{C/W}$

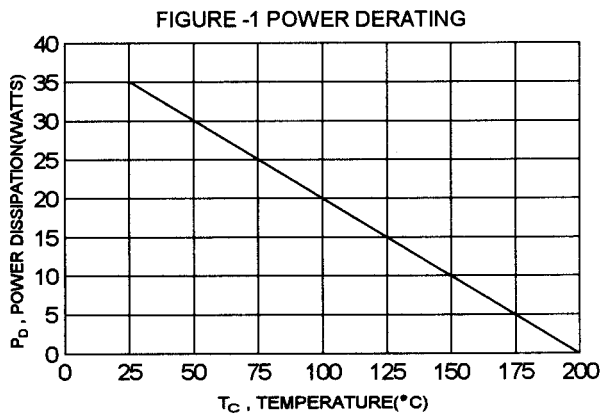

DIM	MILLIMETERS	
	MIN	MAX
A	30.60	32.52
B	13.85	14.16
C	6.54	7.22
D	9.50	10.50
E	17.26	18.46
F	0.76	0.92
G	1.38	1.65
H	24.16	24.78
I	13.84	15.60
J	3.32	3.92
K	4.86	5.34

2N3583 thru 2N3585,2N4240 NPN / 2N6420 thru 2N6423 PNP

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector - Emitter Sustaining Voltage (1) ($I_C = 200\text{ mA}$, $I_B = 0$) NPN 2N3583,2N6420 ($I_C = 50\text{ mA}$, $I_B = 0$) PNP 2N3584,2N6421 2N3585,2N6422 2N4240,2N6423	$V_{CE(sus)}$	175 250 300 300		V
Collector Cutoff Current ($V_{CE} = 150\text{ V}$, $I_B = 0$) 2N3583,2N6420 2N3584,2N6421 2N3585,2N6422 2N4240,2N6423	I_{CEO}		10 5.0 5.0 5.0	mA
Collector Cutoff Current ($V_{CE} = 225\text{ V}$, $V_{BE(off)} = 1.5\text{ V}$) ($V_{CE} = 340\text{ V}$, $V_{BE(off)} = 1.5\text{ V}$) ($V_{CE} = 450\text{ V}$, $V_{BE(off)} = 1.5\text{ V}$) 2N3583,2N6420 2N3584,2N6421 2N3585,2N6422 2N4240,2N6423 ($V_{CE} = 225\text{ V}$, $V_{BE(off)} = 1.5\text{ V}$, $T_C = 150^\circ\text{C}$) ($V_{CE} = 300\text{ V}$, $V_{BE(off)} = 1.5\text{ V}$, $T_C = 150^\circ\text{C}$) 2N3583,2N6420 2N3584,2N6421 2N3585,2N6422 2N4240,2N6423	I_{CEX}		1.0 1.0 1.0 2.0 3.0 3.0 3.0 5.0	mA
Emitter Cutoff Current ($V_{EB} = 6.0\text{ V}$, $I_C = 0$) 2N3583,2N6420 2N3584,2N6421 2N3585,2N6422 2N4240,2N6423	I_{EBO}		5.0 0.5 0.5 0.5	mA


ON CHARACTERISTICS (1)

DC Current Gain ($I_C = 0.1\text{ A}$, $V_{CE} = 10\text{ V}$) ($I_C = 0.5\text{ A}$, $V_{CE} = 10\text{ V}$) ($I_C = 0.75\text{ A}$, $V_{CE} = 2.0\text{ V}$) ($I_C = 0.75\text{ A}$, $V_{CE} = 10\text{ V}$) ($I_C = 1.0\text{ A}$, $V_{CE} = 2.0\text{ V}$) 2N3583,2N6420 2N3584,2N6421 2N3585,2N6422 2N4240,2N6423 2N3583,2N6420 2N3584,2N6421 2N3585,2N6422	hFE	40 40 10 30 8.0 8.0 10 25 25	200 100 150 80 80 100 100	
Collector - Emitter Saturation Voltage ($I_C = 0.75\text{ A}$, $I_B = 75\text{ mA}$) ($I_C = 1.0\text{ A}$, $I_B = 125\text{ mA}$) 2N4240,2N6423 2N3583,2N6420 2N3584,2N6421 2N3585,2N6422	$V_{CE(sat)}$		1.0 5.0 0.75 0.75	V
Base - Emitter Saturation Voltage ($I_C = 0.75\text{ A}$, $I_B = 75\text{ mA}$) ($I_C = 1.0\text{ A}$, $I_B = 100\text{ mA}$) 2N4240,2N6423 2N3584,2N6421 2N3585,2N6422	$V_{BE(sat)}$		1.8 1.4 1.4	V
Base - Emitter On Voltage ($I_C = 1.0\text{ A}$, $V_{CE} = 10\text{ V}$) All devices	$V_{BE(on)}$		1.4	V


(1) Pulse Test: Pulse width = 300 us , Duty Cycle $\leq 2.0\%$

2N3583 thru 2N3585,2N4240


DC CURRENT GAIN

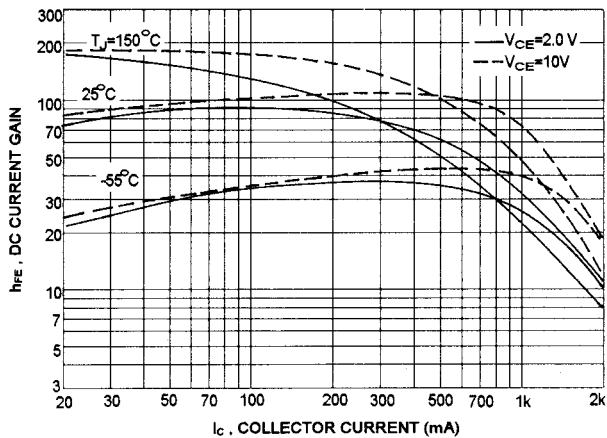

COLLECTOR SATURATION REGION

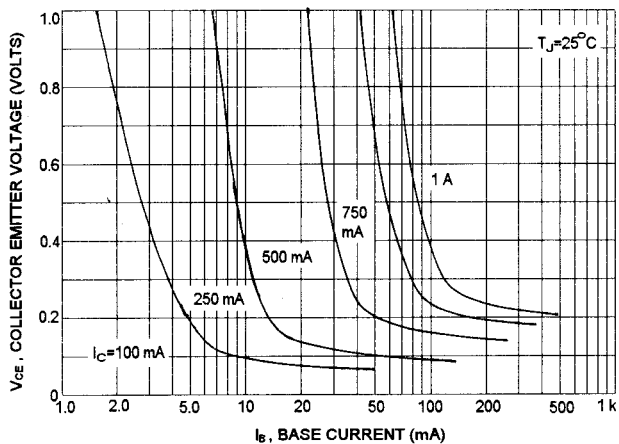


"ON" VOLTAGES

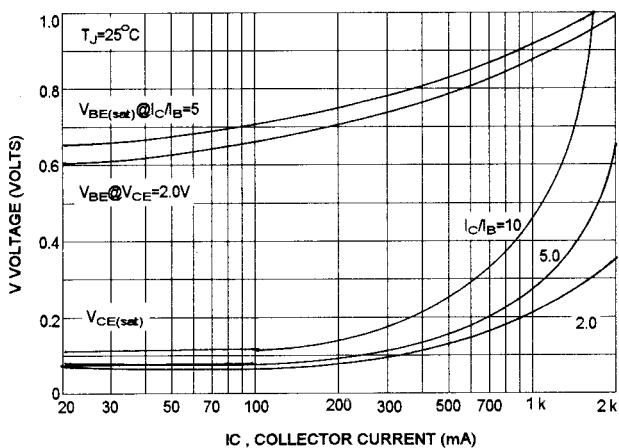


2N6420 thru 2N6423


DC CURRENT GAIN

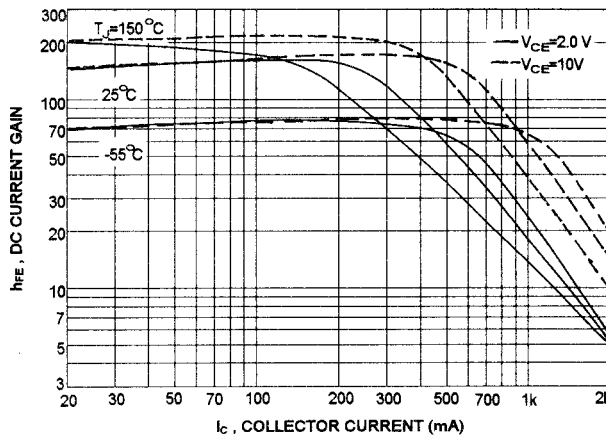

COLLECTOR SATURATION REGION

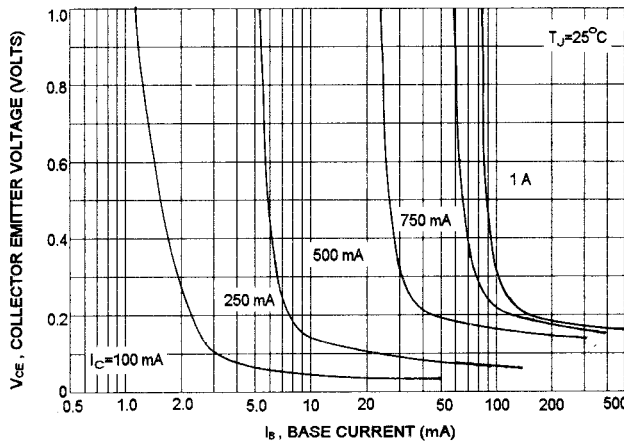


"ON" VOLTAGES

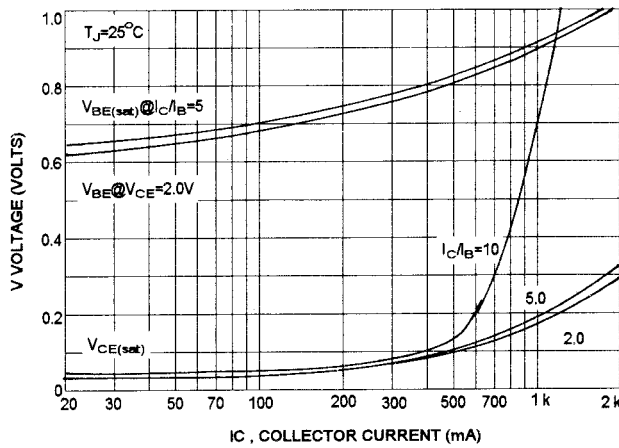

2N3583 thru 2N3585, 2N4240 NPN / 2N6420 thru 2N6423 PNP


2N3583 thru 2N3585, 2N4240

ACTIVE REGION SAFE OPERATING AREA

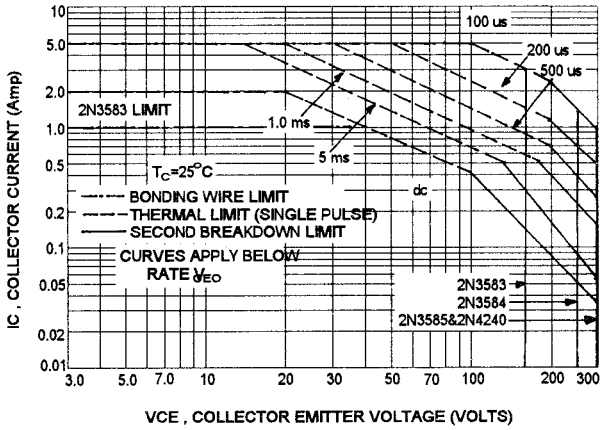


2N6420 thru 2N6423


ACTIVE REGION SAFE OPERATING AREA

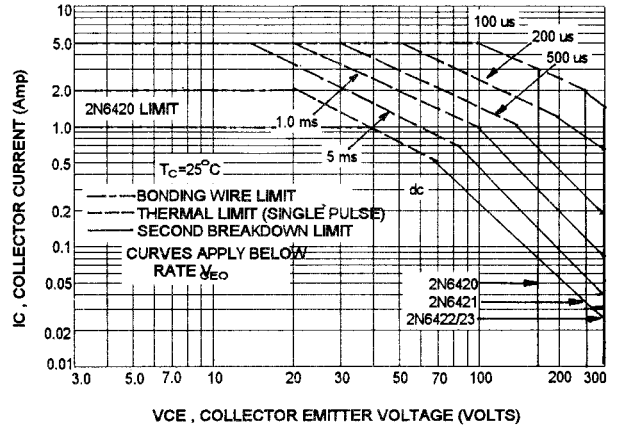


TURN-ON TIME

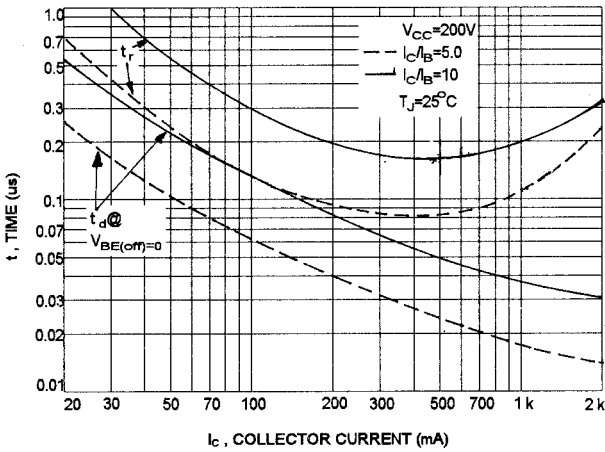


TURN-ON TIME

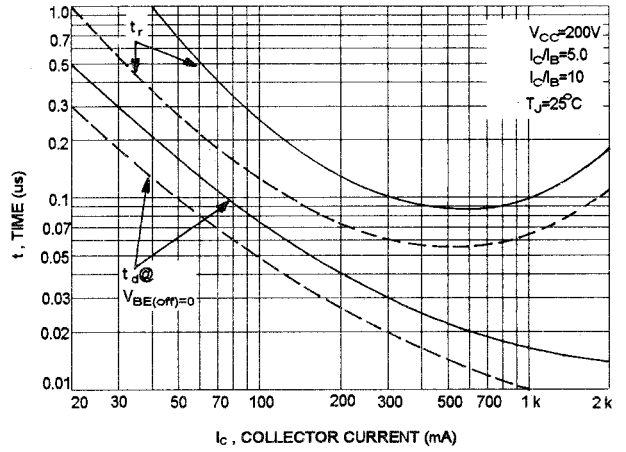

TURN-OFF TIME

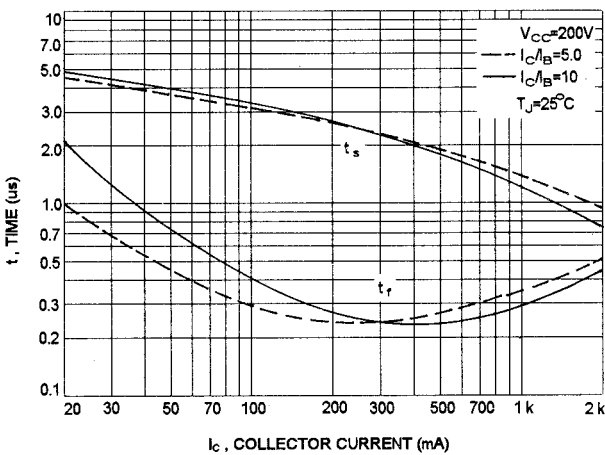

TURN-OFF TIME

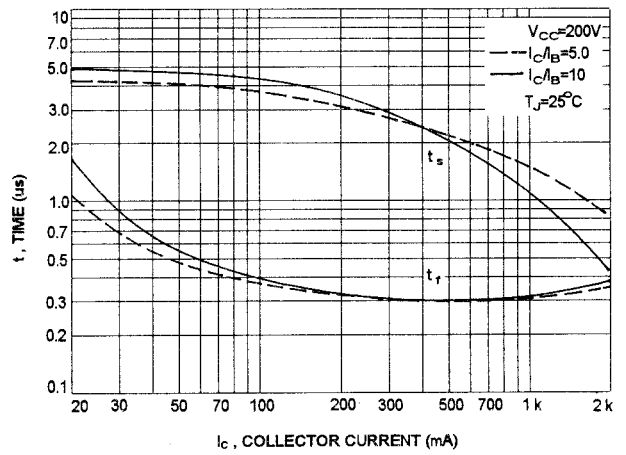



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.