



9014

**NPN SILICON TRANSISTOR**

**FEATURES**

Power dissipation


$$P_{CM} : 0.4 \text{ W (Tamb=25°C)}$$

Collector current

$$I_{CM} : 0.1 \text{ A}$$

Collector-base voltage

$$V_{(BR)CBO} : 50 \text{ V}$$

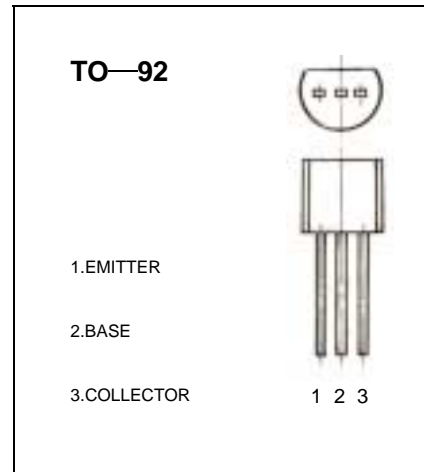

**ELECTRICAL CHARACTERISTICS (Tamb=25°C unless otherwise specified)**

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 100 \mu A, I_E = 0$	50			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = 0.1 \text{ mA}, I_B = 0$	45			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 100 \mu A, I_C = 0$	5			V
Collector cut-off current	$I_{CBO}$	$V_{CB} = 50 \text{ V}, I_E = 0$			0.1	$\mu A$
Collector cut-off current	$I_{CEO}$	$V_{CE} = 35 \text{ V}, I_B = 0$			0.1	$\mu A$
Emitter cut-off current	$I_{EBO}$	$V_{EB} = 3 \text{ V}, I_C = 0$			0.1	$\mu A$
DC current gain(note)	$H_{FE(1)}$	$V_{CE} = 5 \text{ V}, I_C = 1 \text{ mA}$	60		1000	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 100 \text{ mA}, I_B = 5 \text{ mA}$			0.3	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = 100 \text{ mA}, I_B = 5 \text{ mA}$			1	V
Transition frequency	$f_T$	$V_{CE} = 5 \text{ V}, I_C = 10 \text{ mA}$ $f = 30 \text{ MHz}$	150			MHz

**CLASSIFICATION OF  $H_{FE(1)}$**

Rank	A	B	C	D
Range	60-150	100-300	200-600	400-1000



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.