



Switching Diode



BAS16LT1



CASE 318-08, STYLE 8
SOT-23 (TO-236AB)

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Continuous Reverse Voltage	V_R	75	Vdc
Peak Forward Current	I_F	200	mAdc
Peak Forward Surge Current	$I_{FM(surge)}$	500	mAdc

DEVICE MARKING

BAS16LT1 = A6

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR-5 Board, (1) $T_A = 25^\circ\text{C}$	P_D	225	mW
Derate above 25°C		1.8	mW/ $^\circ\text{C}$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	556	$^\circ\text{C/W}$
Total Device Dissipation Alumina Substrate, (2) $T_A = 25^\circ\text{C}$	P_D	300	mW
Derate above 25°C		2.4	mW/ $^\circ\text{C}$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	417	$^\circ\text{C/W}$
Junction and Storage Temperature	T_J, T_{stg}	-55 to +150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------


OFF CHARACTERISTICS

Reverse Voltage Leakage Current ($V_R = 75\text{Vdc}$)	I_R	—	1.0	μAdc
($V_R = 75\text{Vdc}, T_J = 150^\circ\text{C}$)		—	50	
($V_R = 25\text{Vdc}, T_J = 150^\circ\text{C}$)		—	30	
Reverse Breakdown Voltage ($I_{BR} = 100\ \mu\text{Adc}$)	$V_{(BR)}$	75	—	Vdc
Forward Voltage ($I_F = 1.0\ \text{mAdc}$)	V_F	—	715	mV
($I_F = 10\ \text{mAdc}$)		—	855	
($I_F = 50\ \text{mAdc}$)		—	1000	
($I_F = 150\ \text{mAdc}$)		—	1250	
Diode Capacitance ($V_R = 0, f = 1.0\ \text{MHz}$)	C_D	—	2.0	pF
Forward Recovery Voltage ($I_F = 10\ \text{mAdc}, t_r = 20\text{ns}$)	V_{FR}	—	1.75	Vdc
Reverse Recovery Time ($I_F = I_R = 10\ \text{mAdc}, R_L = 50\ \Omega$)	t_{rr}	—	6.0	ns
Stored Charge ($I_F = 10\ \text{mAdc}$ to $V_R = 5.0\text{Vdc}, R_L = 500\ \Omega$)	Q_S	—	45	pC

1. FR-5 = 1.0 x 0.75 x 0.062 in.


2. Alumina = 0.4 x 0.3 x 0.024 in. 99.5% alumina.

BAS16LT1

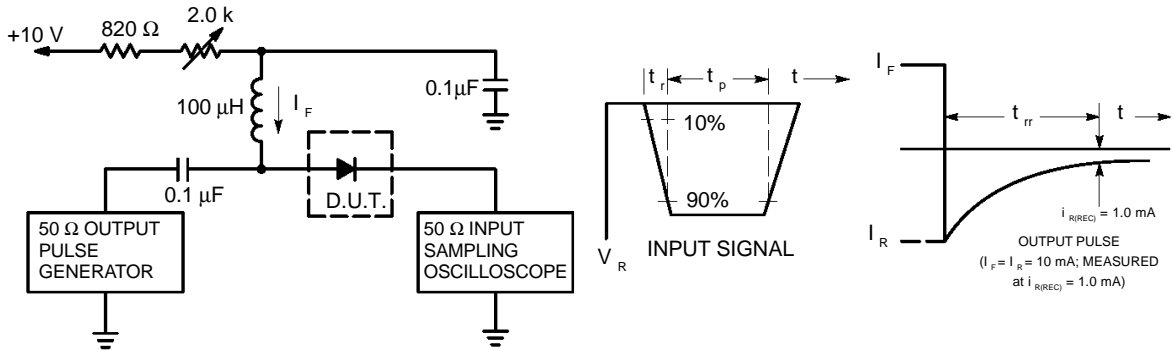


- Notes: 1. A 2.0 kΩ variable resistor adjusted for a Forward Current (I_F) of 10 mA.
- 2. Input pulse is adjusted so $I_{R(peak)}$ is equal to 10 mA.
- 3. $t_p \gg t_{rr}$

Figure 1. Recovery Time Equivalent Test Circuit

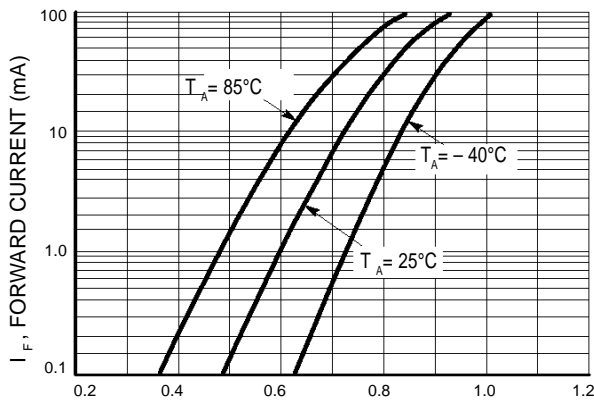


V_F , FORWARD VOLTAGE (VOLTS)

Figure 2. Forward Voltage

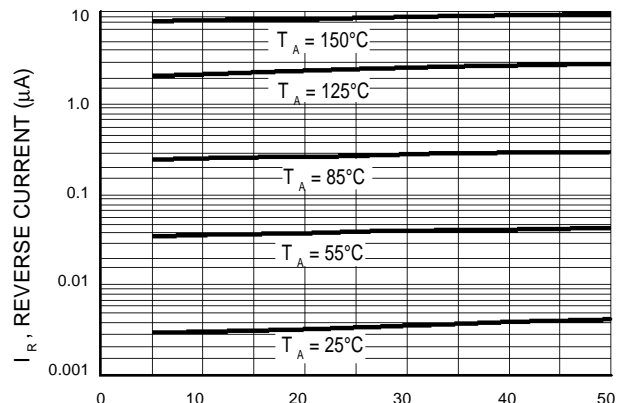

V_R , REVERSE VOLTAGE (VOLTS)

Figure 3. Leakage Current

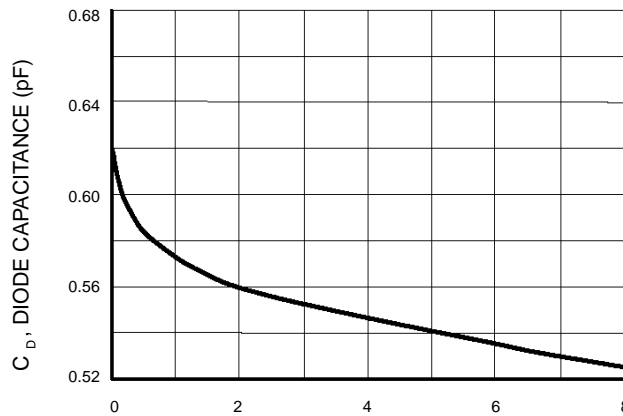

V_R , REVERSE VOLTAGE (VOLTS)

Figure 4. Capacitance



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.