


# BB729

## Tuner Diodes

### SOD-123

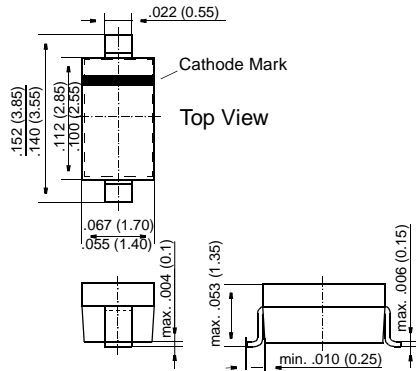

Dimensions in inches and (millimeters)

### FEATURES

- ◆ Silicon epitaxial planar capacitance diodes with very wide effective capacitance variation for tuning the whole range of VHF CTV tuners.
- ◆ These diodes are available as singles or as matched sets of two or more units according to the tracking condition described in the table of characteristics.
- ◆ This diode is also available in SOD-323 case with the type designation BB729S.



### MECHANICAL DATA

**Case:** SOD-123 Plastic Case

**Weight:** approx. 0.01 g

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified

	Symbol	Value	Unit
Reverse Voltage	$V_R$	32	V
Ambient Temperature	$T_{amb}$	125	°C
Storage Temperature Range	$T_S$	-55 to +125	°C

# BB729


## ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified


	Symbol	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage at $I_R = 100 \mu\text{A}$	$V_{(BR)R}$	32	–	–	V
Leakage Current at $V_R = 30 \text{ V}$	$I_R$	–	–	10	nA
Capacitance $f = 1 \text{ MHz}$ at $V_R = 28 \text{ V}$ at $V_R = 1 \text{ V}$	$C_{\text{tot}}$ $C_{\text{tot}}$	2.4 36.0	– –	2.9 42.0	pF pF
Effective Capacitance Ratio, $f = 1 \text{ MHz}$ at $V_R = 1 \text{ to } 28 \text{ V}$	$\frac{C_{\text{tot}}(1 \text{ V})}{C_{\text{tot}}(28 \text{ V})}$	13.5	–	–	–
Series Resistance at $f = 470 \text{ MHz}$ , $C_{\text{tot}} = 25 \text{ pF}$	$r_s$	–	0.80	–	$\Omega$
Series Inductance	$L_s$	–	2.5	–	nH
For any two of six consecutive diodes in the carrier tape, the maximum capacitance deviation in the reverse bias voltage of $V_R = 0.5 \text{ to } 28 \text{ V}$ is max. 2.5%					

# RATINGS AND CHARACTERISTIC CURVES BB729


**Capacitance versus reverse voltage**

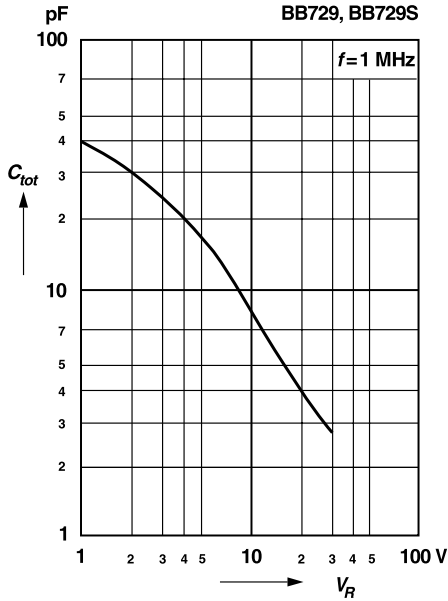


**Leakage current versus reverse voltage**

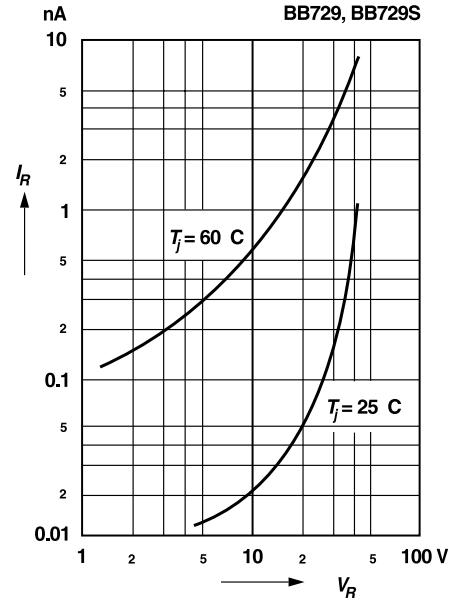

**Relative capacitance versus junction temperature**

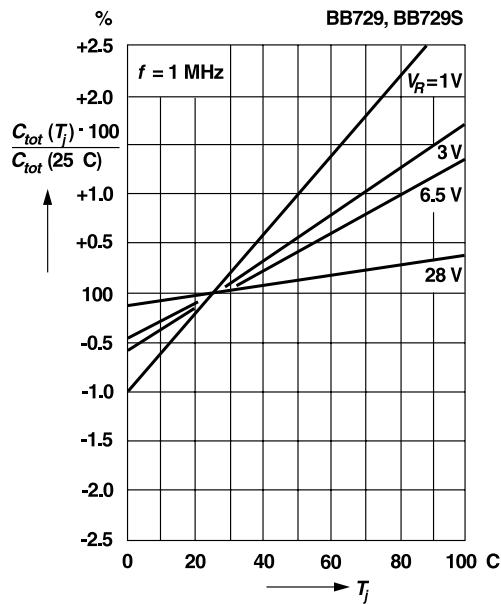

**Q-Factor versus frequency**

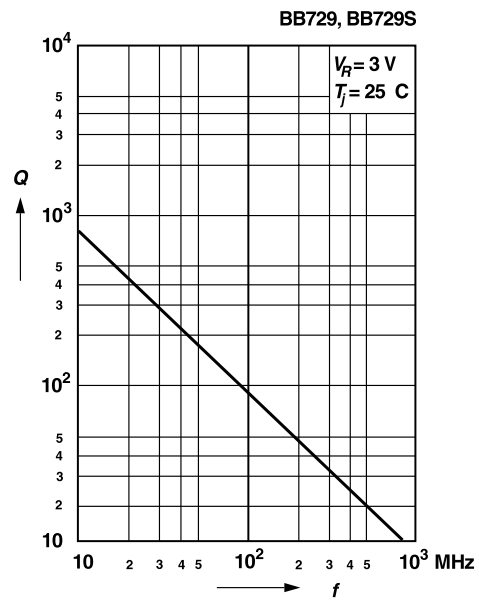



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.