


NPN

Surface mount Si-Epitaxial Planar Transistors
Si-Epitaxial Planar Transistoren für die Oberflächenmontage

NPN

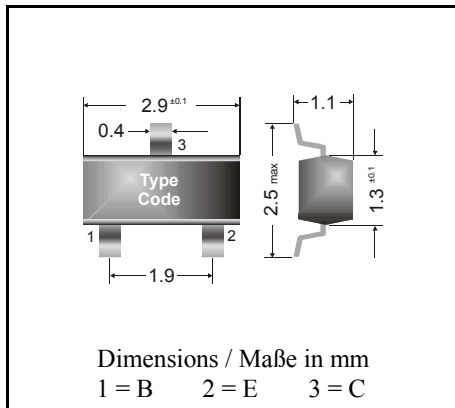

Power dissipation – Verlustleistung 250 mW

Plastic case SOT-23
Kunststoffgehäuse (TO-236)

Weight approx. – Gewicht ca. 0.01 g

Plastic material has UL classification 94V-0
Gehäusematerial UL94V-0 klassifiziertStandard packaging taped and reeled
Standard Lieferform gegurtet auf Rolle**Maximum ratings ($T_A = 25^\circ\text{C}$)****Grenzwerte ($T_A = 25^\circ\text{C}$)**

			BCW 65	BCW 66
Collector-Emitter-voltage	B open	V_{CE0}	32 V	45 V
Collector-Base-voltage	E open	V_{CB0}	60 V	75 V
Emitter-Base-voltage	C open	V_{EB0}	5 V	
Power dissipation – Verlustleistung		P_{tot}	250 mW ¹⁾	
Collector current – Kollektorstrom (DC)		I_C	800 mA	
Peak Collector current – Kollektor-Spitzenstrom		I_{CM}	1000 mA	
Base current – Basis-Spitzenstrom		I_B	100 mA	
Peak Base current – Basis-Spitzenstrom		I_{BM}	200 mA	
Junction temperature – Sperrschichttemperatur		T_j	150°C	
Storage temperature – Lagerungstemperatur		T_S	- 65...+ 150°C	

Characteristics ($T_j = 25^\circ\text{C}$)**Kennwerte ($T_j = 25^\circ\text{C}$)**

				Min.	Typ.	Max.
Collector-Base cutoff current – Kollektorreststrom						
$I_E = 0, V_{CB} = 32\text{ V}$	BCW 65	I_{CB0}		–	–	20 nA
				–	–	20 µA
$I_E = 0, V_{CB} = 45\text{ V}$	BCW 66	I_{CB0}		–	–	20 nA
				–	–	20 µA
Emitter-Base cutoff current – Emitterreststrom						
$I_C = 0, V_{EB} = 4\text{ V}$		I_{EB0}		–	–	20 nA

¹⁾ Mounted on P.C. board with 3 mm² copper pad at each terminal
 Montage auf Leiterplatte mit 3 mm² Kupferbelag (Löt-pad) an jedem Anschluß

Characteristics ($T_j = 25^\circ\text{C}$)Kennwerte ($T_j = 25^\circ\text{C}$)

		Min.	Typ.	Max.
Collector saturation volt. – Kollektor-Sättigungsspg. ¹⁾				
$I_C = 100\text{ mA}, I_B = 10\text{ mA}$	V_{CEsat}	–	–	300 mV
$I_C = 500\text{ mA}, I_B = 50\text{ mA}$	V_{CEsat}	–	–	700 mV
Base saturation voltage – Basis-Sättigungsspannung ¹⁾				
$I_C = 100\text{ mA}, I_B = 10\text{ mA}$	V_{BEsat}	–	–	1.25 V
$I_C = 500\text{ mA}, I_B = 50\text{ mA}$	V_{BEsat}	–	–	2 V
DC current gain – Kollektor-Basis-Stromverhältnis ¹⁾				
$V_{CE} = 10\text{ V}, I_C = 100\text{ }\mu\text{A}$	BCW 65A / 66F	h_{FE}	35	–
	BCW 65B / 66G	h_{FE}	50	–
	BCW 65C / 66H	h_{FE}	80	–
$V_{CE} = 1\text{ V}, I_C = 10\text{ mA}$	BCW 65A / 66F	h_{FE}	75	–
	BCW 65B / 66G	h_{FE}	110	–
	BCW 65C / 66H	h_{FE}	180	–
$V_{CE} = 1\text{ V}, I_C = 100\text{ mA}$	BCW 65A / 66F	h_{FE}	100	160
	BCW 65B / 66G	h_{FE}	160	250
	BCW 65C / 66H	h_{FE}	250	350
$V_{CE} = 2\text{ V}, I_C = 500\text{ mA}$	BCW 65A / 66F	h_{FE}	–	35
	BCW 65B / 66G	h_{FE}	–	60
	BCW 65C / 66H	h_{FE}	–	100
Gain-Bandwidth Product – Transitfrequenz				
$V_{CE} = 5\text{ V}, I_C = 50\text{ mA}, f = 100\text{ MHz}$	f_T	–	170 MHz	–
Collector-Base Capacitance – Kollektor-Basis-Kapazität				
$V_{CB} = 10\text{ V}, I_E = i_e = 0, f = 1\text{ MHz}$	C_{CB0}	–	6 pF	–
Emitter-Base Capacitance – Emitter-Basis-Kapazität				
$V_{EB} = 0.5\text{ V}, I_C = i_c = 0, f = 1\text{ MHz}$	C_{EB0}	–	60 pF	–
Thermal resistance junction to ambient air Wärmewiderstand Sperrschicht – umgebende Luft		R_{thA}		420 K/W ²⁾
Recommended complementary PNP transistors Empfohlene komplementäre PNP-Transistoren			BCW 67, BCW 68	
Marking – Stempelung	BCW 65A = EA	BCW 65B = EB	BCW 65C = EC	
	BCW 66F = EF	BCW 66G = EG	BCW 66H = EH	

¹⁾ Tested with pulses $t_p = 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$ – Gemessen mit Impulsen $t_p = 300\text{ }\mu\text{s}$, Schaltverhältnis $\leq 2\%$

²⁾ Mounted on P.C. board with 3 mm^2 copper pad at each terminal
Montage auf Leiterplatte mit 3 mm^2 Kupferbelag (Lötpad) an jedem Anschluß

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.