

CentralTM Semiconductor Corp.

145 Adams Ave., Hauppauge, NY 11788 USA
Phone (631) 435-1110 FAX (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

www.centrasemi.com

BCY78, VII, VIII, IX, X
BCY79, VII, VIII, IX, X

PNP SILICON TRANSISTOR

JEDEC TO-18 CASE

DESCRIPTION

The CENTRAL SEMICONDUCTOR BCY78, BCY79 Series types are Silicon PNP Epitaxial Planar Transistors, mounted in a hermetically sealed metal case, designed for low noise amplifier and switching applications.

MAXIMUM RATINGS (T_A=25°C unless otherwise noted)

	<u>SYMBOL</u>	<u>BCY78</u>	<u>BCY79</u>	<u>UNITS</u>
Collector-Base Voltage	V _{CBO}	32	45	V
Collector-Emitter Voltage	V _{CEO}	32	45	V
Emitter-Base Voltage	V _{EBO}	5.0		V
Collector Current	I _C	100		mA
Collector Current (Peak)	I _{CM}	200		mA
Base Current (Peak)	I _{BM}	200		mA
Power Dissipation	P _D	340		mW
Power Dissipation(T _C =25°C)	P _D	1.0		W
Operating and Storage Junction Temperature	T _J , T _{stg}	-65 to +200		°C
Thermal Resistance	θ _{JA}	450		°C/W
Thermal Resistance	θ _{JC}	150		°C/W

ELECTRICAL CHARACTERISTICS (T_A=25°C unless otherwise noted)

<u>SYMBOL</u>	<u>TEST CONDITIONS</u>	<u>MIN</u>	<u>MAX</u>	<u>UNITS</u>
I _{CBO}	V _{CB} = Rated V _{CBO}		15	nA
I _{CBO}	V _{CB} = Rated V _{CBO} , T _A =150°C		10	μA
I _{EBO}	V _{EB} =5.0V		20	nA
BV _{CBO}	I _C =10μA (BCY78)	32		V
BV _{CBO}	I _C =10μA (BCY79)	45		V
BV _{CEO}	I _C =2.0mA (BCY78)	32		V
BV _{CEO}	I _C =2.0mA (BCY79)	45		V
BV _{EBO}	I _E =1.0μA	5.0		V
V _{CE(SAT)}	I _C =10mA, I _B =250μA		0.25	V
V _{CE(SAT)}	I _C =100mA, I _B =2.5mA		0.80	V
V _{BE(SAT)}	I _C =10mA, I _B =250μA	0.60	0.85	V
V _{BE(SAT)}	I _C =100mA, I _B =2.5mA	0.70	1.20	V
V _{BE(ON)}	V _{CE} =5.0V, I _C =2.0mA	0.60	0.75	V


<u>SYMBOL</u>	<u>TEST CONDITIONS</u>	BCY78-VII		BCY78-VIII		BCY78-IX		BCY78-X	
		<u>MIN</u>	<u>MAX</u>	<u>MIN</u>	<u>MAX</u>	<u>MIN</u>	<u>MAX</u>	<u>MIN</u>	<u>MAX</u>
h _{FE}	V _{CE} =5.0V, I _C =10μA	140 TYP		30		40		100	
h _{FE}	V _{CE} =5.0V, I _C =2.0mA	120	220	180	310	250	460	380	630
h _{FE}	V _{CE} =1.0V, I _C =10mA	80		120	400	160	630	240	1000
h _{FE}	V _{CE} =1.0V, I _C =100mA	40		45		60		60	

(SEE REVERSE SIDE)

ELECTRICAL CHARACTERISTICS Continued

<u>SYMBOL</u>	<u>TEST CONDITIONS</u>	<u>MIN</u>	<u>TYP</u>	<u>MAX</u>	<u>UNITS</u>
f_T	$V_{CE}=5.0V, I_C=10mA, f=100MHz$	100			MHz
C_{ob}	$V_{CB}=10V, I_E=0, f=1.0MHz$			7.0	pF
C_{ib}	$V_{EB}=0.5V, I_C=0, f=1.0MHz$			15	pF
NF	$V_{CE}=5.0V, I_C=200\mu A, R_S=2k\Omega, f=1.0kHz, B=200Hz$			10	dB
t_{on}	$V_{CC}=3.0V, I_C=10mA, I_{B1}=-I_{B2}=1.0mA$			100	ns
t_d	$V_{CC}=3.0V, I_C=10mA, I_{B1}=-I_{B2}=1.0mA$			50	ns
t_r	$V_{CC}=3.0V, I_C=10mA, I_{B1}=-I_{B2}=1.0mA$			50	ns
t_{off}	$V_{CC}=3.0V, I_C=10mA, I_{B1}=-I_{B2}=1.0mA$			700	ns
t_s	$V_{CC}=3.0V, I_C=10mA, I_{B1}=-I_{B2}=1.0mA$			600	ns
t_f	$V_{CC}=3.0V, I_C=10mA, I_{B1}=-I_{B2}=1.0mA$			100	ns
t_{on}	$V_{CC}=10V, I_C=100mA, I_{B1}=-I_{B2}=10mA$			100	ns
t_d	$V_{CC}=10V, I_C=100mA, I_{B1}=-I_{B2}=10mA$			35	ns
t_r	$V_{CC}=10V, I_C=100mA, I_{B1}=-I_{B2}=10mA$			65	ns
t_{off}	$V_{CC}=10V, I_C=100mA, I_{B1}=-I_{B2}=10mA$			400	ns
t_s	$V_{CC}=10V, I_C=100mA, I_{B1}=-I_{B2}=10mA$			300	ns
t_f	$V_{CC}=10V, I_C=100mA, I_{B1}=-I_{B2}=10mA$			100	ns

TO-18 PACKAGE - MECHANICAL OUTLINE

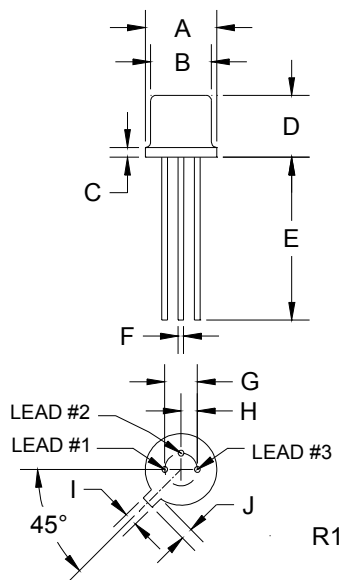

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.209	0.230	5.31	5.84
B (DIA)	0.178	0.195	4.52	4.95
C	-	0.030	-	0.76
D	0.170	0.210	4.32	5.33
E	0.500	-	12.70	-
F (DIA)	0.016	0.019	0.41	0.48
G (DIA)	0.100		2.54	
H	0.050		1.27	
I	0.036	0.046	0.91	1.17
J	0.028	0.048	0.71	1.22

TO-18 (REV: R1)

- Lead Code
1. Emitter
 2. Base
 3. Collector

CentralTM
Semiconductor Corp.

145 Adams Ave., Hauppauge, NY 11788 USA
Phone (631) 435-1110 FAX (631) 435-1824

Manufacturers of World Class Discrete Semiconductors
www.centraisemi.com



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.