



Phase Control Thyristors

$V_{RRM} = 800-1400 \text{ V}$
 $I_{T(RMS)} = 120 \text{ A}$
 $I_{T(AV)M} = 69 \text{ A}$

V_{RSM}	V_{RRM}	Type
V_{DSM}	V_{DRM}	
V	V	
900	800	CS 35-08io4
1300	1200	CS 35-12io4
1500	1400	CS 35-14io4



TO-208AC
(TO-65)



1 = Anode, 2 = Cathode, 3 = Gate

Symbol	Test Conditions	Maximum Ratings	
$I_{T(RMS)}$	$T_{VJ} = T_{VJM}$	120	A
	$T_{case} = 85^{\circ}\text{C}; 180^{\circ}$ sine	63	A
$I_{T(AV)M}$	$T_{case} = 80^{\circ}\text{C}; 180^{\circ}$ sine	69	A
I_{TSM}	$T_{VJ} = 45^{\circ}\text{C}; V_R = 0$	t = 10 ms (50 Hz), sine	1200 A
		t = 8.3 ms (60 Hz), sine	1340 A
I^2t	$T_{VJ} = 45^{\circ}\text{C}; V_R = 0$	t = 10 ms (50 Hz), sine	7200 A ² s
		t = 8.3 ms (60 Hz), sine	7550 A ² s
$(di/dt)_{cr}$	$T_{VJ} = T_{VJM}; f = 50\text{Hz}; t_p = 200\mu\text{s}; V_D = 2/3 V_{DRM}; I_G = 0.5 \text{ A}$	repetitive, $I_T = 150 \text{ A}$	150 A/ μs
	$di_G/dt = 0.5 \text{ A}/\mu\text{s}$	non repetitive, $I_T = I_{T(AV)M}$	400 A/ μs
$(dv/dt)_{cr}$	$T_{VJ} = T_{VJM}; R_{GK} = \infty; \text{method 1 (linear voltage rise)}$	$V_{DR} = 2/3 V_{DRM}$	1000 V/ μs
P_{GM}	$T_{VJ} = T_{VJM}$	$t_p = 30 \mu\text{s}$	10 W
	$I_T = I_{T(AV)M}$	$t_p = 500 \mu\text{s}$	5 W
$P_{G(AV)}$			0.5 W
V_{RGM}			10 V
T_{VJ}		-40...+125	$^{\circ}\text{C}$
T_{VJM}		125	$^{\circ}\text{C}$
T_{stg}		-40...+125	$^{\circ}\text{C}$
M_d	Mounting torque	2.5	Nm
		22	lb.in.
Weight		20	g

Features

- Thyristor for line frequencies
- International standard package JEDEC TO-208AC
- Planar glassivated chip
- Long-term stability of blocking currents and voltages


Applications

- Motor control
- Power converter
- AC power controller

Advantages

- Space and weight savings
- Simple mounting
- Improved temperature and power cycling

Dimensions in mm (1 mm = 0.0394")

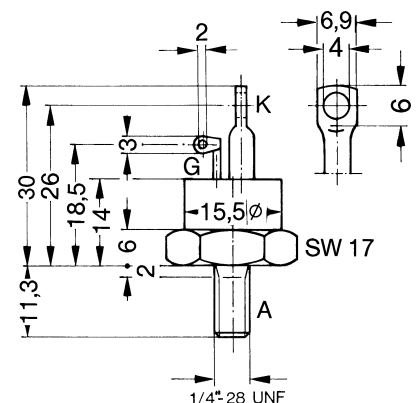

Data according to IEC 60747
IXYS reserves the right to change limits, test conditions and dimensions

Symbol	Test Conditions	Characteristic Values
I_R, I_D	$T_{VJ} = T_{VJM}; V_R = V_{RRM}; V_D = V_{DRM}$	≤ 10 mA
V_T	$I_T = 150$ A; $T_{VJ} = 25^\circ\text{C}$	≤ 1.5 V
V_{T0}	For power-loss calculations only ($T_{VJ} = 125^\circ\text{C}$)	0.85 V
r_T		3.5 m Ω
V_{GT}	$V_D = 6$ V; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = -40^\circ\text{C}$	≤ 1.5 V ≤ 1.9 V
I_{GT}	$V_D = 6$ V; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = -40^\circ\text{C}$	≤ 100 mA ≤ 200 mA
V_{GD}	$T_{VJ} = T_{VJM}; V_D = 2/3 V_{DRM}$	≤ 0.2 V
I_{GD}		≤ 1 mA
I_L	$T_{VJ} = 25^\circ\text{C}; t_p = 30$ μs $I_G = 0.1$ A; $di_G/dt = 0.1$ A/ μs	≤ 100 mA
I_H	$T_{VJ} = 25^\circ\text{C}; V_D = 6$ V; $R_{GK} = \infty$	≤ 80 mA
t_{gd}	$T_{VJ} = 25^\circ\text{C}; V_D = 1/2 V_{DRM}$ $I_G = 0.1$ A; $di_G/dt = 0.1$ A/ μs	≤ 2 μs
t_q	$T_{VJ} = T_{VJM}; I_T = 50$ A, $t_p = 200$ μs ; $di/dt = -10$ A/ μs $V_R = 100$ V; $dv/dt = 10$ V/ μs ; $V_D = 2/3 V_{DRM}$	typ. 100 μs
R_{thJC}	DC current	0.4 K/W
R_{thJH}	DC current	0.6 K/W
d_S	Creepage distance on surface	1.7 mm
d_A	Strike distance through air	1.7 mm
a	Max. acceleration, 50 Hz	50 m/s ²

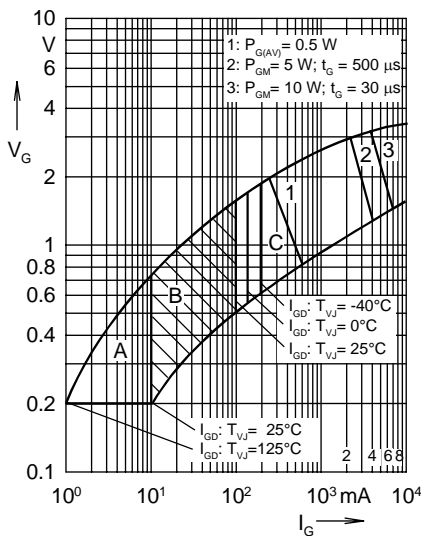


Fig. 1 Gate trigger range
Triggering:
A = no; B = possible, C = safe

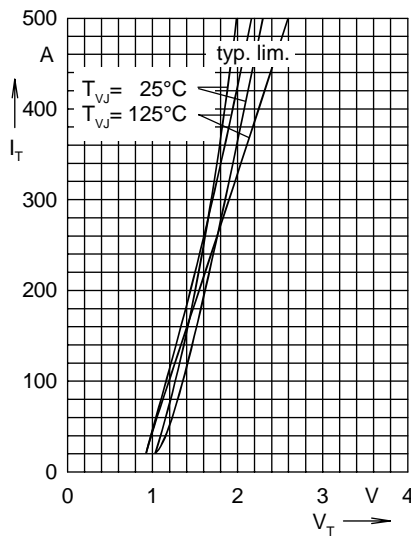


Fig. 2 On-state characteristics

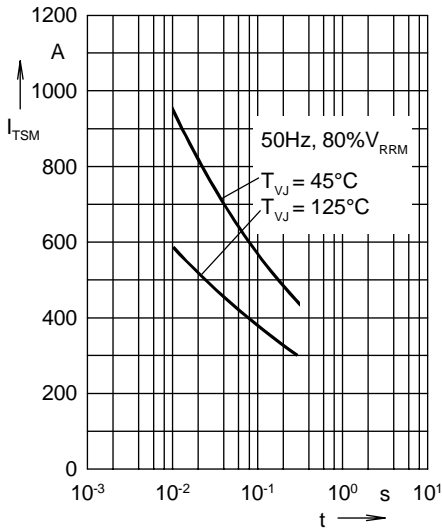


Fig. 3 Surge overload current
 I_{TSM} : crest value, t: duration

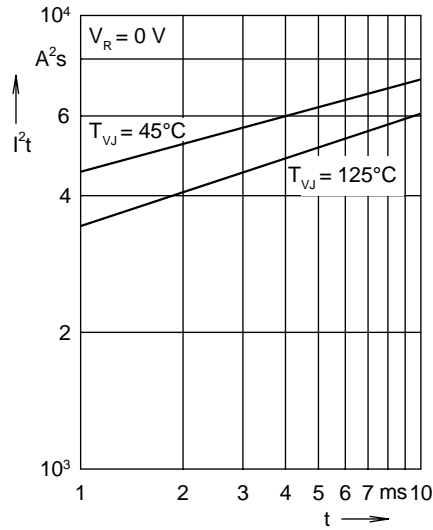


Fig. 4 I^2t versus time (1-10 ms)

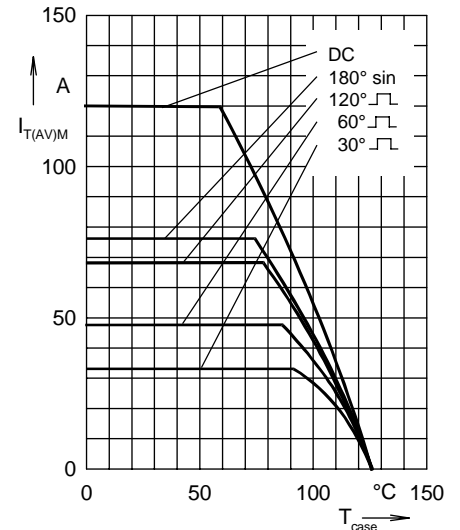


Fig. 5 Maximum forward current at case temperature

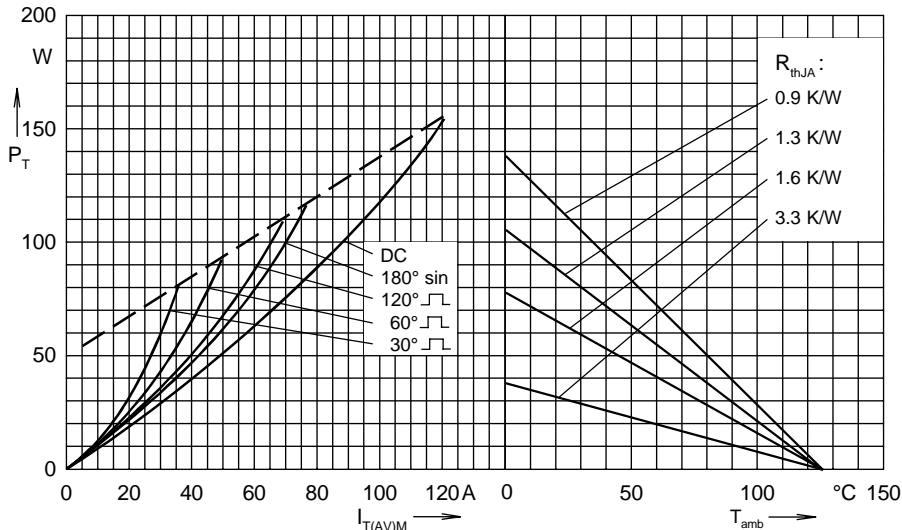


Fig. 6 Power dissipation versus on-state current and ambient temperature

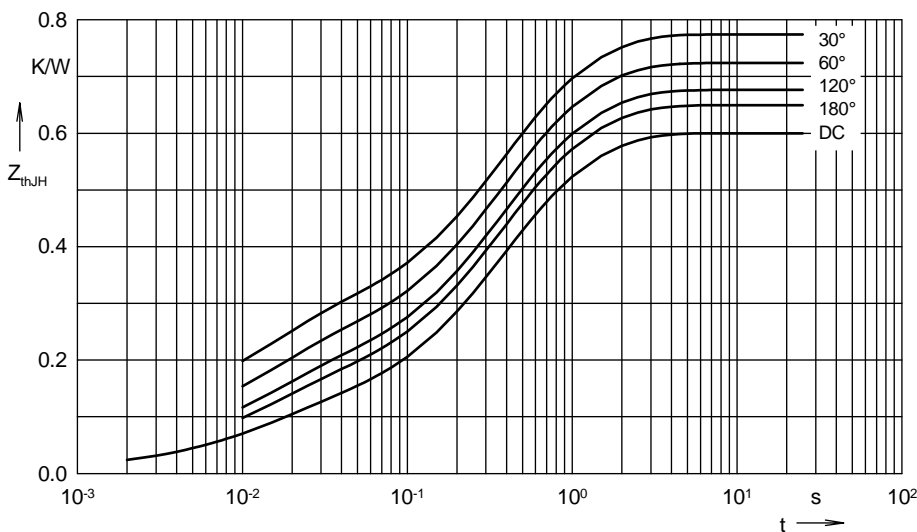


Fig. 7 Transient thermal impedance junction to heatsink

R_{thJH} for various conduction angles d:

d	R_{thJH} (K/W)
DC	0.6
180°	0.65
120°	0.677
60°	0.725
30°	0.775

Constants for Z_{thJH} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.01	0.001
2	0.09	0.013
3	0.30	0.3
4	0.20	0.9



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.