

Symbol	Test Conditions	Characteristic Values	
I_R, I_D	$T_{VJ} = T_{VJM}; V_R = V_{RRM}; V_D = V_{DRM}$	\leq	3 mA
V_T	$I_T = 33 \text{ A}; T_{VJ} = 25^\circ\text{C}$	\leq	1.6 V
V_{T0}	For power-loss calculations only ($T_{VJ} = 125^\circ\text{C}$)		1.0 V
r_T			18 m Ω
V_{GT}	$V_D = 6 \text{ V}; T_{VJ} = 25^\circ\text{C}$	\leq	2.5 V
	$T_{VJ} = -40^\circ\text{C}$	\leq	3.5 V
I_{GT}	$V_D = 6 \text{ V}; T_{VJ} = 25^\circ\text{C}$	\leq	30 mA
	$T_{VJ} = -40^\circ\text{C}$	\leq	50 mA
V_{GD}	$T_{VJ} = T_{VJM}; V_D = 2/3 V_{DRM}$	\leq	0.2 V
I_{GD}		\leq	1 mA
I_L	$T_{VJ} = 25^\circ\text{C}; t_p = 10 \mu\text{s}$ $I_G = 0.09 \text{ A}; di_G/dt = 0.09 \text{ A}/\mu\text{s}$	\leq	100 mA
I_H	$T_{VJ} = 25^\circ\text{C}; V_D = 6 \text{ V}; R_{GK} = \infty$	\leq	80 mA
t_{gd}	$T_{VJ} = 25^\circ\text{C}; V_D = 1/2 V_{DRM}$ $I_G = 0.09 \text{ A}; di_G/dt = 0.09 \text{ A}/\mu\text{s}$	\leq	2 μs
t_q	$T_{VJ} = T_{VJM}; I_T = 16 \text{ A}, t_p = 300 \mu\text{s}; di/dt = -20 \text{ A}/\mu\text{s}$ $V_R = 100 \text{ V}; dv/dt = 20 \text{ V}/\mu\text{s}; V_D = 2/3 V_{DRM}$	typ.	60 μs
R_{thJC}	DC current		1.5 K/W
R_{thJH}	DC current		2.5 K/W
d_s	Creepage distance on surface		1.55 mm
d_A	Strike distance through air		1.55 mm
a	Max. acceleration, 50 Hz		50 m/s ²

Accessories:

Nut M5 DIN 439/SW8

Lock washer A5 DIN 128

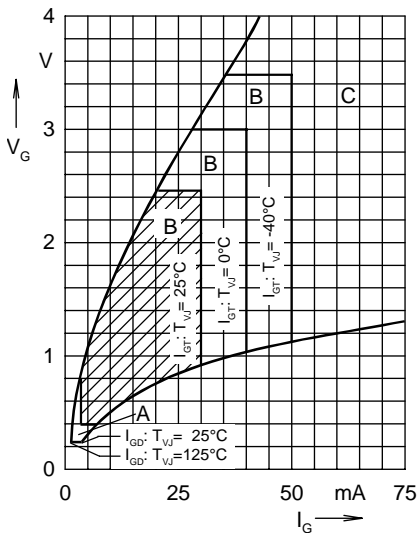


Fig. 1 Gate voltage and gate current Triggering:
A = no; B = possible; C = safe

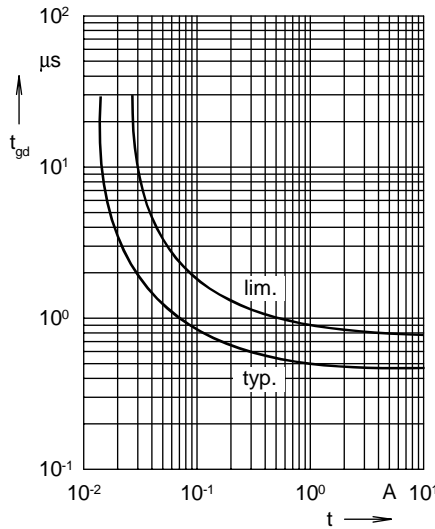


Fig. 2 Gate controlled delay time t_{gd}

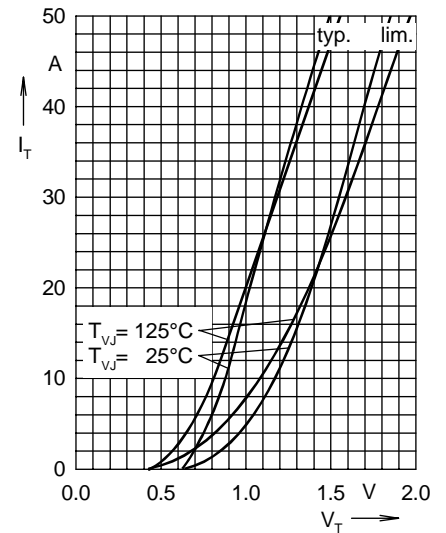


Fig. 3 On-state characteristics

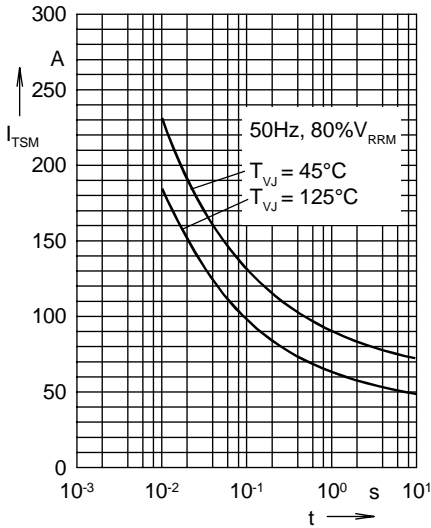


Fig. 4 Surge overload current
 I_{TSM} : crest value, t: duration

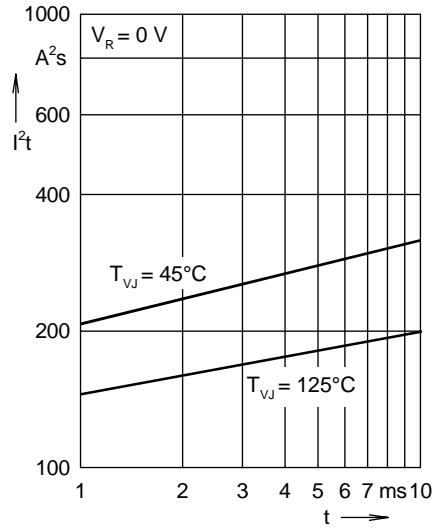


Fig. 5 I^2t versus time (1-10 ms)

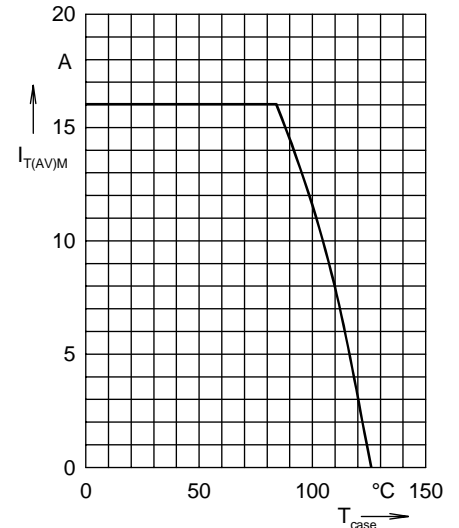


Fig. 6 Maximum forward current at case temperature 180° sine

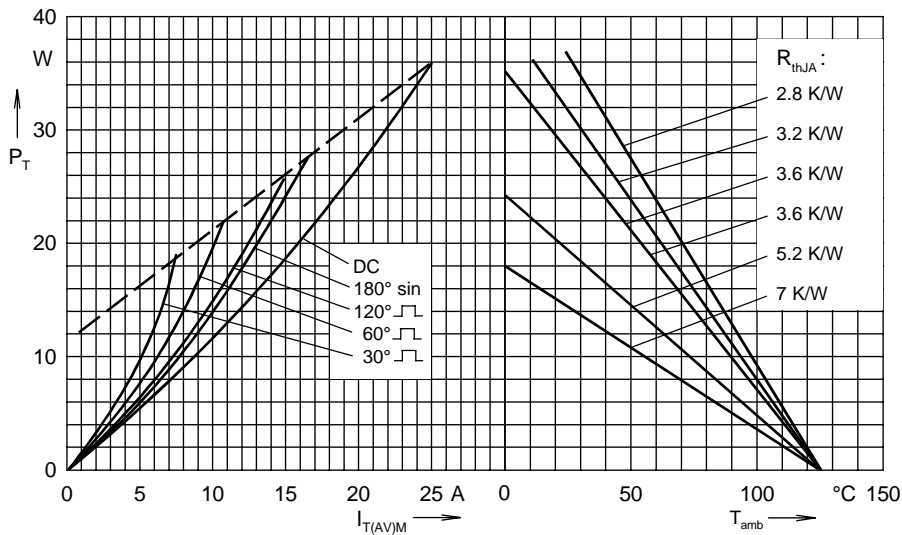


Fig. 7 Power dissipation versus on-state current and ambient temperature

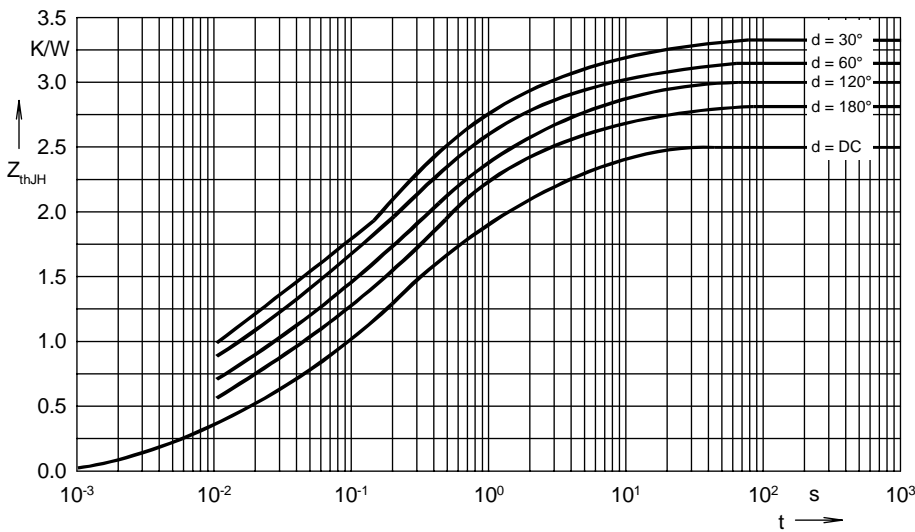


Fig. 8 Transient thermal impedance junction to heatsink

R_{thJH} for various conduction angles d:

d	R_{thJH} (K/W)
DC	2.5
180°	2.79
120°	2.95
60°	3.17
30°	3.32

Constants for Z_{thJH} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.252	0.005
2	0.333	0.0225
3	0.5	0.145
4	0.833	0.43
5	0.416	2.75
6	0.166	23



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.