

GP1A15

High Sensing Accuracy Type OPIC Photointerrupter

■ Features


1. High sensing accuracy
(slit width : 0.25mm)
2. Built-in schmidt trigger circuit
3. Low threshold input current
(I_{FLH} : MAX. 10mA)
4. Low level supply current
(I_{CCL} : MAX. 5mA)
5. Operating supply voltage V_{CC} : 4.5 to 17V
6. TTL and CMOS compatible output

■ Applications

1. Floppy disk drives
2. Copiers, printers, facsimiles
3. Optoelectronic switches, optoelectronic counters

■ Outline Dimensions

(Unit : mm)

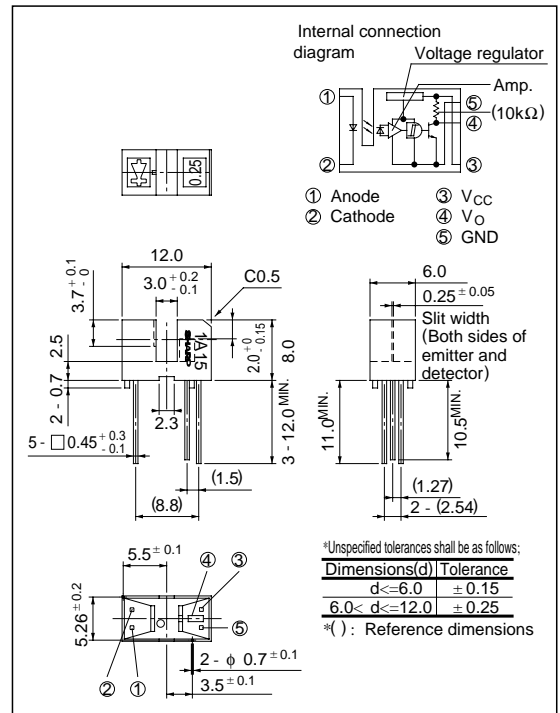

*** OPIC™ (Optical IC) is a trademark of the SHARP Corporation.
An OPIC consists of a light-detecting element and signal-processing circuit integrated onto a single chip.

■ Absolute Maximum Ratings

($T_a = 25^\circ\text{C}$)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I_F	50	mA
	*1 Peak forward current	I_{FM}	1	A
	Reverse voltage	V_R	6	V
	Power dissipation	P	75	mW
Output	Supply voltage	V_{CC}	- 0.5 to + 17	V
	Output current	I_O	50	mA
	Power dissipation	P_O	250	mW
Operating temperature		T_{opr}	- 25 to + 85	$^\circ\text{C}$
Storage temperature		T_{stg}	- 40 to + 100	$^\circ\text{C}$
*2 Soldering temperature		T_{sol}	260	$^\circ\text{C}$

*1 Pules width $\leq 100 \mu\text{s}$, Duty ratio = 0.01

*2 For 5 seconds

Electro-optical Characteristics

(Ta = 25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Input	Forward voltage	V_F	$I_F = 10\text{mA}$	-	1.15	1.4	V	
	Reverse current	I_R	$V_R = 3\text{V}$	-	-	10	μA	
Output	Operating supply voltage	V_{CC}		4.5	-	17	V	
	Low level output voltage	V_{OL}	$I_{OL} = 16\text{mA}, V_{CC} = 5\text{V}, I_F = 0$	-	0.15	0.4	V	
	High level output voltage	V_{OH}	$V_{CC} = 5\text{V}, I_F = 10\text{mA}$	4.9	-	-	V	
	Low level supply current	I_{CCL}	$V_{CC} = 5\text{V}, I_F = 0$	-	2.5	5.0	mA	
	High level supply current	I_{CCH}	$V_{CC} = 5\text{V}, I_F = 10\text{mA}$	-	1.0	3.0	mA	
	Transfer characteristics	*3 "Low→High" threshold input current	I_{FLH}	$V_{CC} = 5\text{V}$	0.2	2.5	10	mA
*4 Hysteresis		I_{FHL} / I_{FLH}	0.55		0.75	0.95	-	
Response time		"Low→High" propagation delay time	t_{PLH}	$V_{CC} = 5\text{V}$ $I_F = 10\text{mA}$ $R_L = 280\Omega$	-	3	9	μs
		"High→Low" propagation delay time	t_{PHL}		-	5	15	
		Rise time	t_r		-	0.1	0.5	
		Fall time	t_f		-	0.05	0.5	

*3 I_{FLH} represents forward current when output goes from low to high.

*4 I_{FHL} represents forward current when output goes from high to low.

Hysteresis stands for I_{FHL} / I_{FLH} .

Recommended Operating Conditions

Parameter	Symbol	Operating temperature	MIN.	MAX.	Unit
Low level output current	I_{OL}	Ta = 0 to + 70°C	-	16.0	mA
Forward current	I_F		12.5	20.0	mA

Fig. 1 Forward Current vs. Ambient Temperature

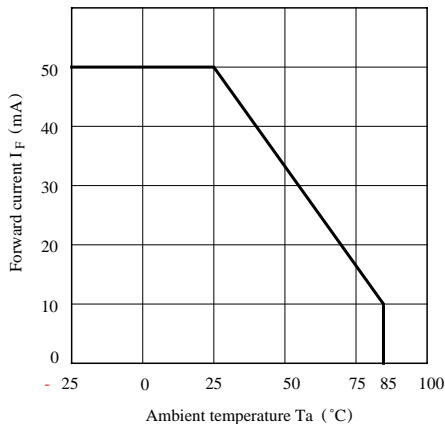


Fig. 2 Output Power Dissipation vs. Ambient Temperature

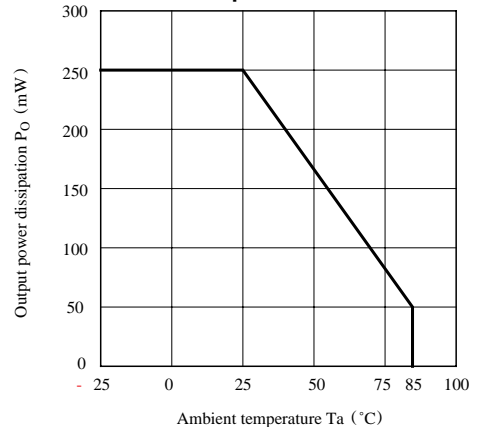


Fig. 3 Low Level Output Current vs. Ambient Temperature

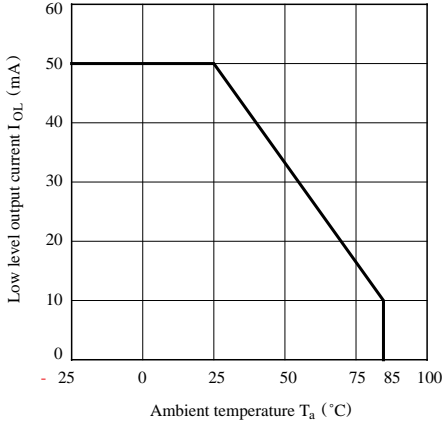


Fig. 4 Forward Current vs. Forward Voltage

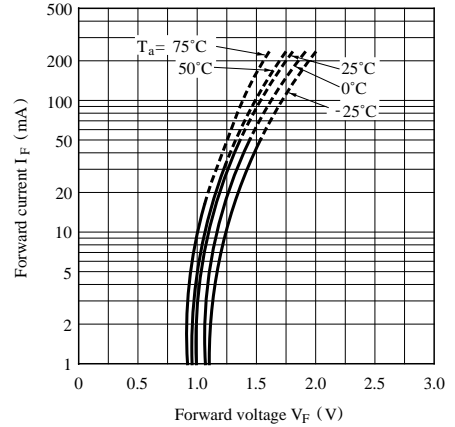


Fig. 5 Relative Threshold Input Current vs. Supply Voltage

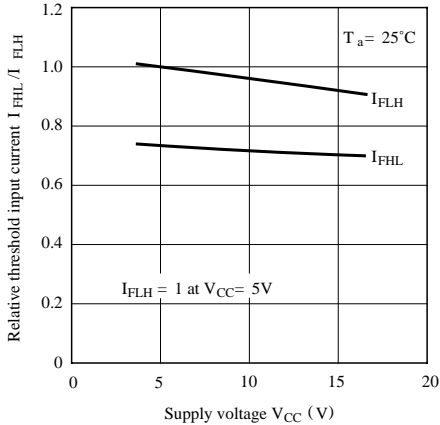


Fig. 6 Relative Threshold Input Current vs. Ambient Temperature

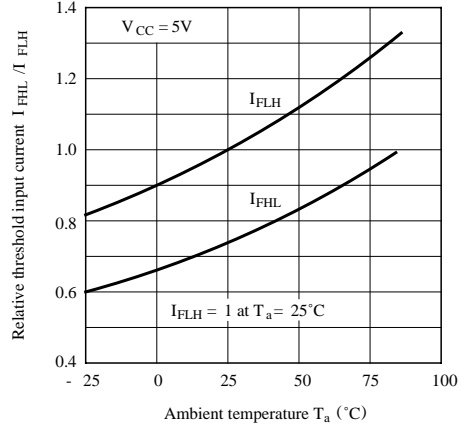


Fig. 7 Low Level Output Voltage vs. Low Level Output Current

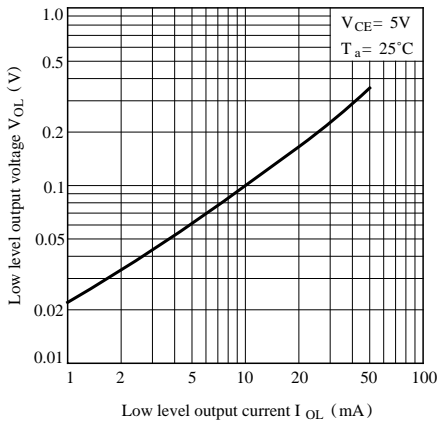


Fig. 8 Low Level Output Voltage vs. Ambient Temperature

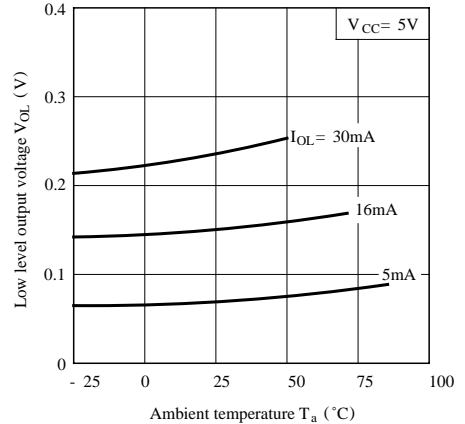


Fig. 9 Supply Current vs. Supply Voltage

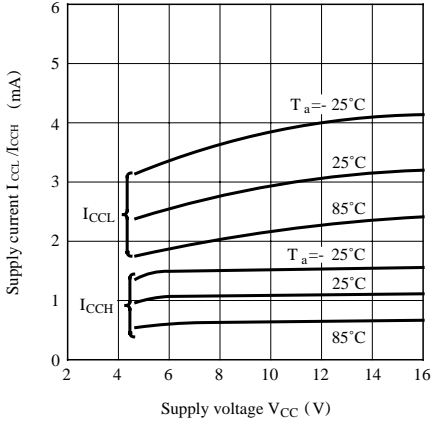


Fig.10 Propagation Delay Time vs. Forward Current



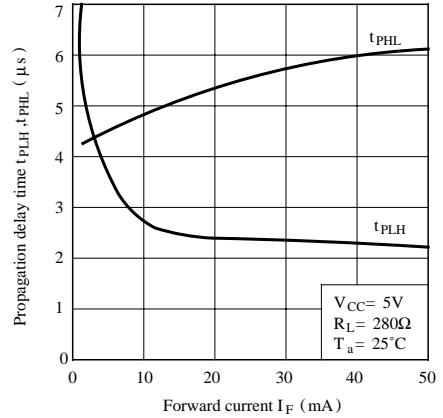


Fig.11 Rise Time, Fall Time vs. Load Resistance

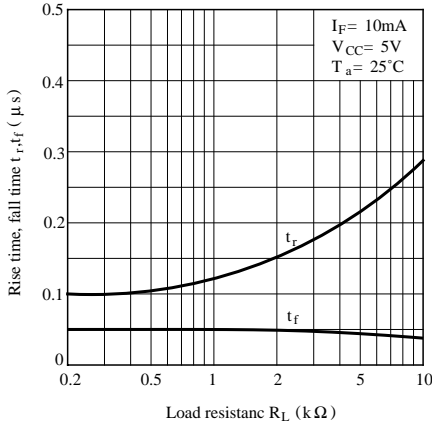

Test Circuit for Response Time

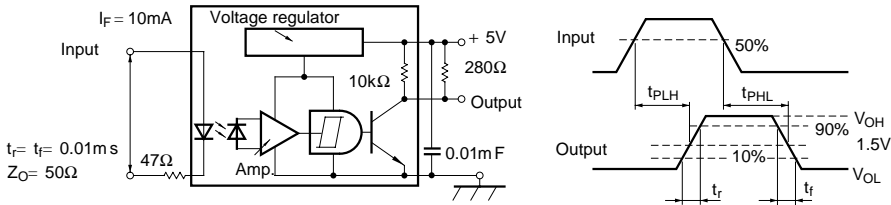

■ Precautions for Use

- (1) In order to stabilize power supply line, connect a by-pass capacitor of more than 0.01 μF between V_{CC} and GND near the device.
- (2) As for other general cautions, refer to the chapter “Precautions for Use”.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.