



AZ23C2V7 THRU AZ23C51

Dual Surface Mount Zener Diode



Voltage Range
2.7 to 51 Volts
300m Watts Power Dissipation


Features

- ✧ Dual zeners in common anode configuration
- ✧ 300 mW power dissipation rating
- ✧ Ideally suited for automated insertion
- ✧ ΔV_z for both diodes in one case is $\leq 5\%$
- ✧ Common cathode style available see DZ series

Mechanical Data

- ✧ Case: SOT-23, Molded plastic
- ✧ Terminals: Solderable per MIL-STD-202, Method 208
- ✧ Polarity: See diagram
- ✧ Marking: Marking Code (see table on Page 2)
- ✧ Mounting position: Any
- ✧ Weight: 0.008 grams (approx.)

SOT-23

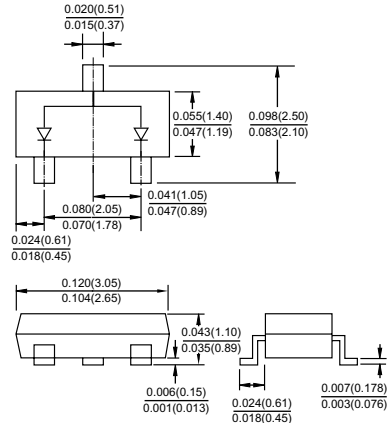

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Maximum Ratings

Type Number	Symbol	Value	Units
Power Dissipation (Note 1)	P_d	300	mW
Thermal Resistance Junction to Ambient Air (Note 1)	$R_{\theta JA}$	420	K/W
Operating and Storage Temperature Range	T_J, T_{STG}	-65 to + 150	°C

Notes: 1. Device on Fiberglass Substrate.

2. Tested with IZT Current pulses. Pulse width = 5ms.

ELECTRICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

Device (Note 1)	Device Marking Code	Zener Voltage Range @ I _{ZT} = 5.0mA V _Z (Volts) (Notes 2)	Maximum Zener Impedance		Typical Temperature Coefficient	Min Reverse Voltage @ I _R = 0.1uA V _R (Volts)
			Z _{ZT} @ I _{ZT} = 5.0mA	Z _{ZK} @ I _{ZK} = 1.0mA		
			Ohms	Ohms	T _c (%/°C)	
AZ23C2V7	D1	2.5-2.9	83	500	-0.065	-
AZ23C3V0	D2	2.8-3.2	95	500	-0.060	-
AZ23C3V3	D3	3.1-3.5	95	500	-0.055	-
AZ23C3V6	D4	3.4-3.8	95	500	-0.055	-
AZ23C3V9	D5	3.7-4.1	95	500	-0.050	-
AZ23C4V3	D6	4.0-4.6	95	500	-0.035	-
AZ23C4V7	D7	4.4-5.0	78	500	-0.015	-
AZ23C5V1	D8	4.8-5.4	60	480	+0.005	0.8
AZ23C5V6	D9	5.2-6.0	40	400	+0.020	1.0
AZ23C6V2	D10	5.8-6.6	10	200	+0.030	2.0
AZ23C6V8	D11	6.4-7.2	8.0	150	+0.045	3.0
AZ23C7V5	D12	7.0-7.9	7.0	50	+0.050	5.0
AZ23C8V2	D13	7.7-8.7	7.0	50	+0.055	6.0
AZ23C9V1	D14	8.5-9.6	10	50	+0.065	7.0
AZ23C10	D15	9.4-10.6	15	70	+0.065	7.5
AZ23C11	D16	10.4-11.6	20	70	+0.070	8.5
AZ23C12	D17	11.4-12.7	20	90	+0.075	9.0
AZ23C13	D18	12.4-14.1	25	110	+0.080	10.0
AZ23C15	D19	13.8-15.6	30	110	+0.080	11.0
AZ23C16	D20	15.30-17.1	40	170	+0.090	12.0
AZ23C18	D21	16.8-19.1	50	170	+0.090	14.0
AZ23C20	D22	18.8-21.2	50	220	+0.090	15.0
AZ23C22	D23	20.8-23.3	55	220	+0.090	17.0
AZ23C24	D24	22.8-25.6	80	220	+0.090	18.0
AZ23C27	D25	25.1-28.9	80	250	+0.090	20.0
AZ23C30	D26	28-32	80	250	+0.090	22.5
AZ23C33	D27	31-35	80	250	+0.090	25.0
AZ23C36	D28	34-39	90	250	+0.090	27.0
AZ23C39	D29	37-41	90	300	+0.110	29.0
AZ23C43	D30	40-46	100	700	+0.110	32.0
AZ23C47	D31	44-50	100	750	+0.110	35.0
AZ23C51	D32	48-54	100	750	+0.110	38.0

Notes: 1. Device on fiberglass substrate.

2. Tested with I_{ZT} current pulses. Pulse width = 5.0ms.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.