



BAV16W / 1N4148W

Surface Mount Fast Switching Diode



Voltage Range
75 Volts
400m Watts Power Dissipation


Features

- ✧ Fast switching speed
- ✧ Surface mount package ideally suited for automatic insertion
- ✧ For general purpose switching applications
- ✧ High conductance

Mechanical Data

- ✧ Case: SOD-123, Molded plastic
- ✧ Terminals: Solderable per MIL-STD-202, Method 208
- ✧ Polarity: Cathode Band
- ✧ Marking: Date Code and Type Code or Date Code only
Type Code: T6, T4
- ✧ Weight: 0.01 gram (approx.)

SOD-123

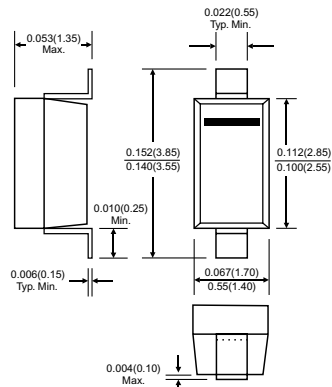

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Maximum Ratings

Type Number	Symbol	Value	Units
Non-Repetitive Peak Reverse Voltage	VRM	100	V
Peak Repetitive Reverse Voltage	VRRM		
Working Peak Reverse Voltage	VRWM	75	V
DC Blocking Voltage	VR		
RMS Reverse Voltage	VR(RMS)	53	V
Forward Continuous Current (Note 1)	IFM	300	mA
Average Rectifier Output Current (Note 1)	Io	150	mA
Non-Repetitive Peak Forward Surge Current @ t=1.0uS @ t=1.0S	IFSM	2.0 1.0	A
Power Dissipation (Note 1)	Pd	400	mW
Thermal Resistance Junction to Ambient Air (Note 1)	R θ JA	315	K/W
Operating and Storage Temperature Range	T _J , T _{STG}	-65 to + 150	°C

Electrical Characteristics

Type Number	Symbol	Min	Max	Units
Forward Voltage IF=1.0mA IF= 10mA IF = 50mA IF=150mA	VF	-	0.715 0.855 1.0 1.25	V
Peak Reverse Current VR=75V VR=75V, Tj=150°C VR=25V, Tj=150°C VR=20V	IR	-	1.0 50 30 25	uA nA
Junction Capacitance VR=0, f=1.0MHz	Cj	-	2.0	pF
Reverse Recovery Time (Note 2)	trr	-	4.0	nS

Notes: 1. Valid Provided that Terminals are Kept at Ambient Temperature.

2. Reverse Recovery Test Conditions: IF=IR=10mA, Irr=0.1 x IR, RL=100Ω.

RATINGS AND CHARACTERISTIC CURVES (BAV16W / 1N4148W)

FIG.1- FORWARD CHARACTERISTICS

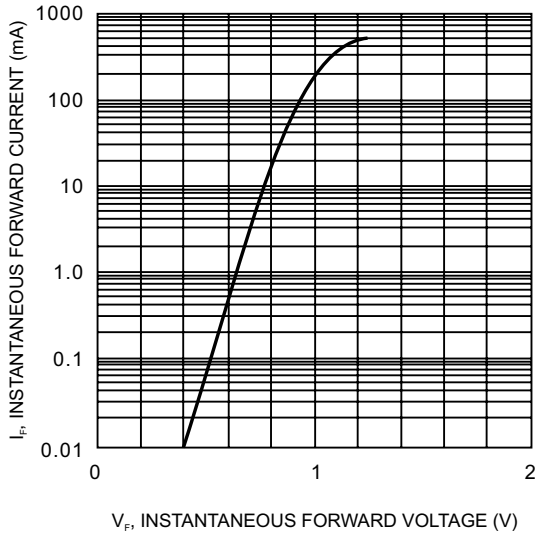


FIG.2- LEAKAGE CURRENT VS JUNCTION TEMPERATURE


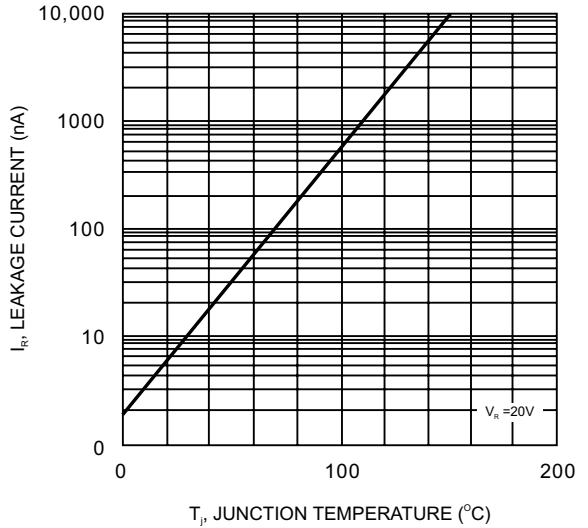


FIG.3- ADMISSIBLE POWER DISSIPATION VS AMBIENT TEMPERATURE



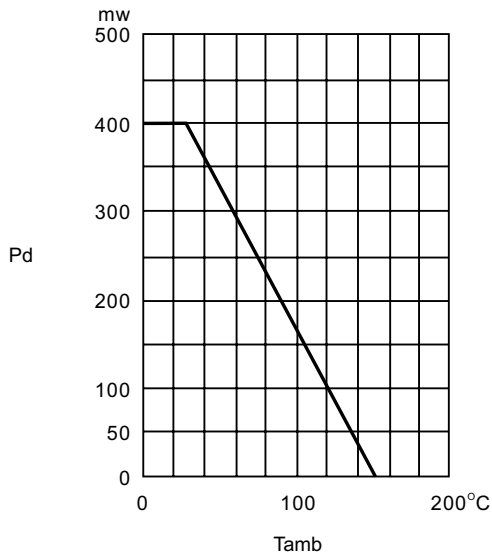

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.