



CMR1S-01
CMR1S-02

**SUPER FAST RECOVERY RECTIFIER
1.0 AMP, 100 AND 200 VOLTS**

—————*SUPER*
—————*FAST*



SMB CASE

FEATURES:

- FASTER SWITCHING SPEED (35ns Max)
- LOWER V_F (.95V)
- RUNS COOLER THAN ULTRA FAST RECTIFIER
- LOW COST - HIGH RELIABILITY
- GLASS PASSIVATED CHIP
- "C" BEND CONSTRUCTION PROVIDES STRAIN RELIEF WHEN MOUNTED ON PC BOARD

DESCRIPTION:

The Central Semiconductor 1.0 Amp Surface Mount Silicon Super Fast Recovery Rectifier is a high quality, well constructed, highly reliable component designed for use in all types of commercial, industrial, entertainment, computer, and automotive applications. To order devices on 12mm Tape and Reel (3000/13" Reel), add TR13 suffix to part number.


MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

	SYMBOL	CMR1S -01	CMR1S -02	UNITS
Peak Repetitive Reverse Voltage	V_{RRM}	100	200	V
DC Blocking Voltage	V_R	100	200	V
RMS Reverse Voltage	$V_{R(RMS)}$	70	140	V
Average Forward Current	I_O		1.0	A
Peak Forward Surge Current (8.3ms)	I_{FSM}		30	A
Operating and Storage Junction Temperature	T_J, T_{stg}	-65 to +150		$^\circ\text{C}$
Thermal Resistance	Θ_{JL}	20		$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_R	V_R =Rated V_{RRM}			5.0	μA
I_R	V_R =Rated V_{RRM} , $T_A=100^\circ\text{C}$			500	μA
V_F	$I_F=1.0\text{A}$			0.95	V
t_{rr}	$I_F=0.5\text{A}$, $I_R=1.0\text{A}$, Recover to 0.25A			35	ns
C_J	$V_R=4.0\text{V}$, $f=1.0\text{MHz}$		10		pF

All dimensions in inches (mm).

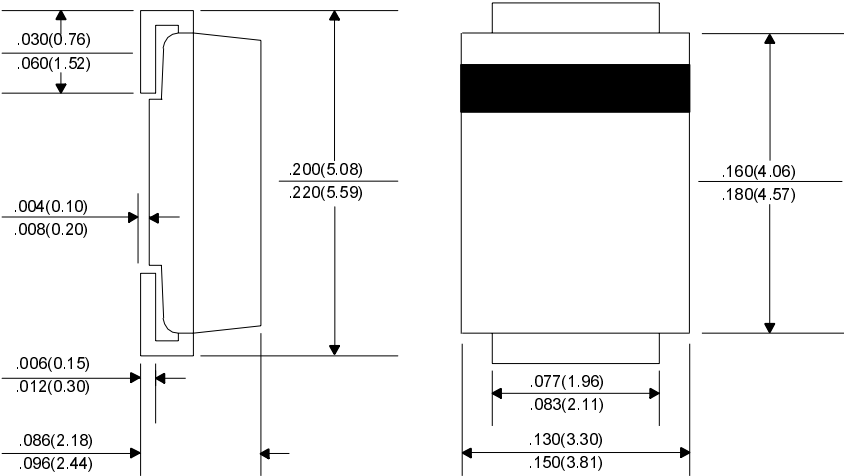

DEVICE	MARKING CODE
CMR1S-01	CSF01
CMR1S-02	CSF02



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.