

**CMR5U-02**  
**CMR5U-04**  
**CMR5U-06**  
**CMR5U-08**  
**SURFACE MOUNT**  
**ULTRA FAST RECOVERY RECTIFIER**  
**5.0 AMP, 200 THRU 800 VOLTS**



# Central<sup>TM</sup>

## Semiconductor Corp.

**FEATURES:**

- LOW COST
- HIGH CURRENT DENSITY  
-65% INCREASE COMPARED TO CMR3U SERIES
- HIGH PEAK FORWARD SURGE CURRENT ( $I_{FSM}$ )
- LOW FORWARD VOLTAGE DROP ( $V_F$ )
- GLASS PASSIVATED CHIP
- "C" BEND CONSTRUCTION PROVIDES STRAIN RELIEF WHEN MOUNTED ON PC BOARD

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR 5.0 Amp Surface Mount Silicon Ultra Fast Recovery Rectifier is a high quality, well constructed, highly reliable component designed for use in all types of commercial, industrial, entertainment, computer and automotive applications. To order devices on 16mm Tape and Reel (3000/ 13" Reel), add TR13 suffix to part number


**MAXIMUM RATINGS:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

	SYMBOL	CMR5U-02	CMR5U-04	CMR5U-06	CMR5U-08	UNITS
Peak Repetitive Reverse Voltage	$V_{RRM}$	200	400	600	800	V
DC Blocking Voltage	$V_R$	200	400	600	800	V
RMS Reverse Voltage	$V_{R(RMS)}$	140	280	420	560	V
Average Forward Current ( $T_A=55^\circ\text{C}$ )	$I_O$			5.0		A
Peak Forward Surge Current(8.3ms)	$I_{FSM}$			175		A
Operating and Storage Junction Temperature	$T_J, T_{stg}$			-65 to +150		$^\circ\text{C}$
Thermal Resistance	$\theta_{JL}$			10		$^\circ\text{C/W}$

**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^\circ\text{C}$ ) unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
$I_R$	$V_R$ =Rated $V_{RRM}$		10	$\mu\text{A}$
$I_R$	$V_R$ =Rated $V_{RRM}$ , $T_A=100^\circ\text{C}$		100	$\mu\text{A}$
$V_F$	$I_F=5.0\text{A}$ , (CMR5U-02)		1.0	V
$V_F$	$I_F=5.0\text{A}$ , (CMR5U-04)		1.3	V
$V_F$	$I_F=5.0\text{A}$ , (CMR5U-06 and CMR5U-08)		1.7	V
$t_{rr}$	$I_F=0.5\text{A}$ , $I_R=1.0\text{A}$ , $I_{rr} = 0.25\text{A}$ (CMR5U-02 and CMR5U-04)		50	ns
$t_{rr}$	$I_F=0.5\text{A}$ , $I_R=1.0\text{A}$ , $I_{rr} = 0.25\text{A}$ (CMR5U-06 and CMR5U-08)		100	ns

**SMC CASE - MECHANICAL OUTLINE**

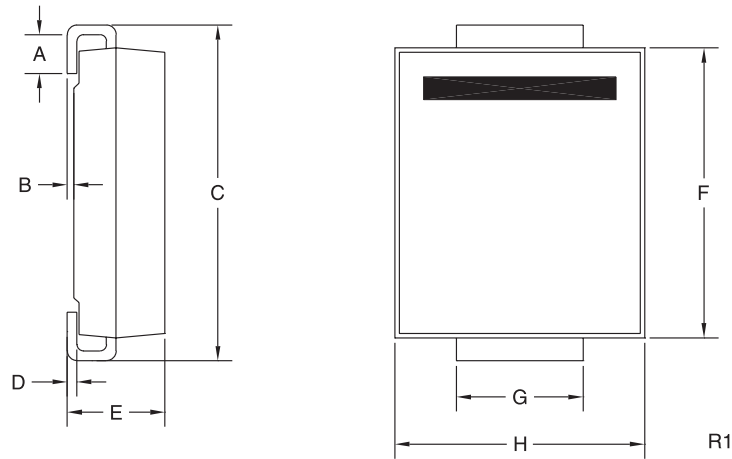

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.030	0.060	0.76	1.52
B	0.004	0.008	0.10	0.20
C	0.305	0.320	7.75	8.13
D	0.006	0.012	0.15	0.31
E	0.079	0.103	2.00	2.62
F	0.260	0.280	6.60	7.11
G	0.108	0.124	2.75	3.15
H	0.220	0.245	5.59	6.22

SMC (REV: R1)

**MARKING CODES:**

DEVICE	MARKING CODE
CMR5U-02	CU502
CMR5U-04	CU504
CMR5U-06	CU506
CMR5U-08	CU508



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.