



CMSH1-20ML
CMSH1-40ML

SCHOTTKY BARRIER RECTIFIER
1.0 AMP, 20 & 40 VOLTS

CentralTM
Semiconductor Corp.

FEATURES:

- EXTREMELY LOW FORWARD VOLTAGE DROP
- SUPERIOR LOT TO LOT CONSISTENCY
- HIGH RELIABILITY
- "C" BEND CONSTRUCTION PROVIDES STRAIN RELIEF WHEN MOUNTED ON PC BOARD
- LOW COST

LOW
V_F



SMA CASE

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMSH1-20ML Series are Surface Mount Silicon Schottky Rectifiers designed for applications where extremely low forward voltage drop is required. To order devices on 12mm Tape and Reel (3000/13" Reel), add TR13 suffix to part number.


MAXIMUM RATINGS: ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

	SYMBOL	CMSH1-20ML	CMSH1-40ML	UNITS
Peak Repetitive Reverse Voltage	V_{RRM}	20	40	V
DC Blocking Voltage	V_R	20	40	V
RMS Reverse Voltage	$V_R(\text{RMS})$	14	28	V
Average Forward Current	I_O		1.0	A
Peak Forward Surge Current (8.3ms)	I_{FSM}		30	A
Operating and Storage				
Junction Temperature	T_J, T_{stg}		-65 to +150	$^{\circ}\text{C}$
Thermal Resistance	θ_{JL}		28	$^{\circ}\text{C}/\text{W}$
Thermal Resistance	θ_{JA}		88	$^{\circ}\text{C}/\text{W}$

ELECTRICAL CHARACTERISTICS: ($T_C=25^{\circ}\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_R	$V_R = \text{Rated } V_{RRM}$			0.5	mA
I_R	$V_R = \text{Rated } V_{RRM}, T_C = 100^{\circ}\text{C}$			20	mA
V_F	$I_F = 1.0\text{A (CMSH1-20ML)}$			0.38	V
V_F	$I_F = 1.0\text{A (CMSH1-40ML)}$			0.40	V

All Dimensions in Inches (mm).

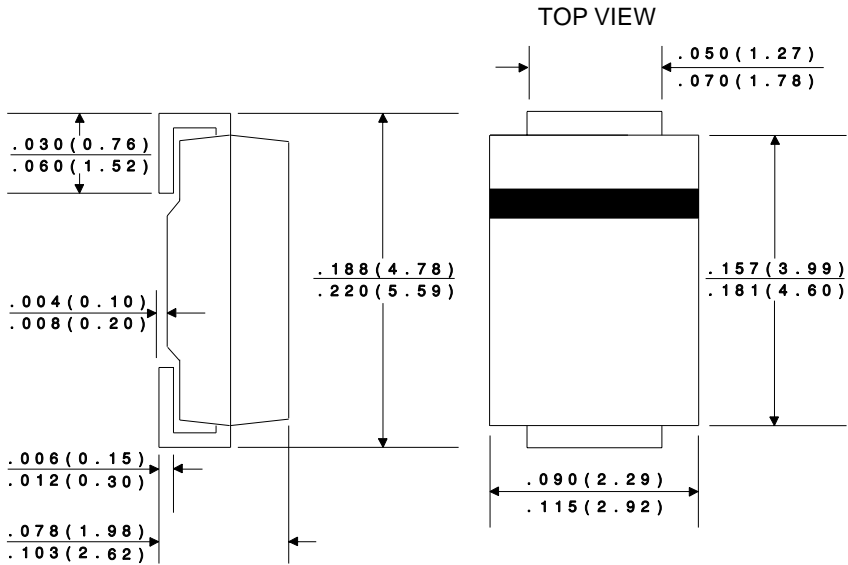

DEVICE	MARKING CODE
CMSH1-20ML	CS20ML
CMSH1-40ML	CS40ML



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.