

COMPLEMENTARY NPN/PNP PRE-BIASED SMALL SIGNAL SOT-563 DUAL SURFACE MOUNT TRANSISTOR


NEW PRODUCT

Features

- Epitaxial Planar Die Construction
- Built-In Biasing Resistors
- Lead-Free Device


Mechanical Data

- Case: SOT-563, Molded Plastic
- Case material - UL Flammability Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Finish - Matte Tin Solderable per MIL-STD-202, Method 208 (Note 1)
- Terminal Connections: See Diagram
- Weight: 0.005 grams (approx.)

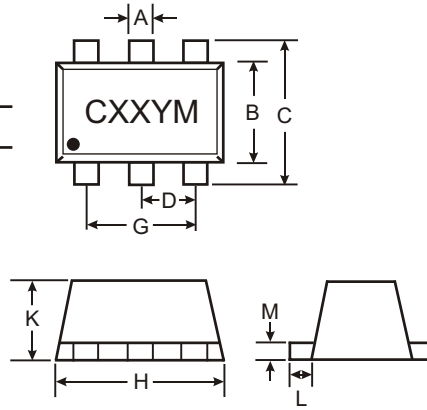

| SOT-563 | | | |
|----------------------|------|------|------|
| Dim | Min | Max | Typ |
| A | 0.15 | 0.30 | 0.25 |
| B | 1.10 | 1.25 | 1.20 |
| C | 1.55 | 1.70 | 1.60 |
| D | 0.50 | | |
| G | 0.90 | 1.10 | 1.00 |
| H | 1.50 | 1.70 | 1.60 |
| K | 0.56 | 0.60 | 0.60 |
| L | 0.15 | 0.25 | 0.20 |
| M | 0.10 | 0.18 | 0.11 |
| All Dimensions in mm | | | |

| P/N | R1 (NOM) | R2 (NOM) | MARKING |
|----------|----------------|--------------|---------|
| DCX122LH | 0.22K Ω | 10K Ω | C81 |
| DCX142JH | 0.47K Ω | 10K Ω | C82 |
| DCX122TH | 0.22K Ω | OPEN | C83 |
| DCX142TH | 0.47K Ω | OPEN | C84 |

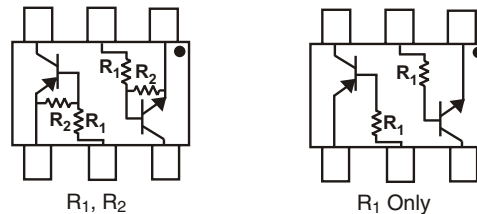

SCHMATIC DIAGRAM, TOP VIEW

Maximum Ratings NPN Section @ T_A = 25°C unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|--|-----------------------------------|-------------|------|
| Supply Voltage | V _{CC} | 50 | V |
| Input Voltage | V _{IN} | -5 to +6 | V |
| Input Voltage | V _{EBO (MAX)} | 5 | V |
| Output Current | I _C | 100 | mA |
| Power Dissipation (Note 2, 3) | P _d | 150 | mW |
| Thermal Resistance, Junction to Ambient Air (Note 2) | R _{θJA} | 833 | °C/W |
| Operating and Storage and Temperature Range | T _J , T _{STG} | -55 to +150 | °C |

- Note:
1. If lead-bearing terminal plating is required, please contact your Diodes Inc. sales representative for availability and minimum order details.
 2. Mounted on FR4 PC Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.
 3. NPN Section, PNP Section, or maximum combined.

Maximum Ratings PNP Section @ T_A = 25°C unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|--|--|----------------------|------|
| Supply Voltage | V _{CC} | -50 | V |
| Input Voltage | DCX122LH DCX142JH V _{IN} | +5 to -6 +5 to -6 | V |
| Input Voltage | DCX122TH DCX142TH V _{EBO (MAX)} | -5 | V |
| Output Current | All I _C | -100 | mA |
| Power Dissipation (Note 2, 3) | P _d | 150 | mW |
| Thermal Resistance, Junction to Ambient Air (Note 2) | R _{θJA} | 833 | °C/W |
| Operating and Storage and Temperature Range | T _j , T _{STG} | -55 to +150 | °C |

- Note: 1. If lead-bearing terminal plating is required, please contact your Diodes Inc. sales representative for availability and minimum order details.
 2. Mounted on FR4 PC Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.
 3. NPN Section, PNP Section, or maximum combined.

Electrical Characteristics NPN Section @ T_A = 25°C unless otherwise specified R1, R2 Types

| Characteristic | Symbol | Min | Typ | Max | Unit | Test Condition |
|-------------------------|---|----------|-----|------------|------|--|
| Input Voltage | DCX122LH DCX142JH V _{I(off)} | 0.3 | — | — | V | V _{CC} = 5V, I _O = 100μA |
| | DCX122LH DCX142JH V _{I(on)} | — | — | 2.0 2.0 | V | V _O = 0.3V, I _O = 20mA V _O = 0.3V, I _O = 20mA |
| Output Voltage | V _{O(on)} | — | — | 0.3V | V | I _O /I _I = 5mA/0.25mA |
| Input Current | DCX122LH DCX142JH I _I | — | — | 28 13 | mA | V _I = 5V |
| Output Current | I _{O(off)} | — | — | 0.5 | μA | V _{CC} = 50V, V _I = 0V |
| DC Current Gain | DDCX122LH DDCX142JH G _I | 56 56 | — | — | — | V _O = 5V, I _O = 10mA |
| Gain-Bandwidth Product* | f _T | — | 200 | — | MHz | V _{CE} = 10V, I _E = 5mA, f = 100MHz |

* Transistor - For Reference Only

Electrical Characteristics NPN Section @ T_A = 25°C unless otherwise specified R1-Only

| Characteristic | Symbol | Min | Typ | Max | Unit | Test Condition |
|--------------------------------------|---|------------|------------|------------|------|---|
| Collector-Base Breakdown Voltage | BV _{CBO} | 50 | — | — | V | I _C = 50μA |
| Collector-Emitter Breakdown Voltage | BV _{CEO} | 40 | — | — | V | I _C = 1mA |
| Emitter-Base Breakdown Voltage | DCX122TH DCX142TH BV _{EBO} | 5 | — | — | V | I _E = 50μA I _E = 50μA |
| Collector Cutoff Current | I _{CBO} | — | — | 0.5 | μA | V _{CB} = 50V |
| Emitter Cutoff Current | DCX122TH DCX142TH I _{EBO} | — | — | 0.5 0.5 | μA | V _{EB} = 4V |
| Collector-Emitter Saturation Voltage | V _{CE(sat)} | — | — | 0.3 | V | I _C = 5mA, I _B = 0.25mA |
| DC Current Transfer Ratio | DCX122TH DCX142TH h _{FE} | 100 100 | 250 250 | 600 600 | — | I _C = 1mA, V _{CE} = 5V |
| Gain-Bandwidth Product* | f _T | — | 200 | — | MHz | V _{CE} = 10V, I _E = -5mA, f = 100MHz |

* Transistor - For Reference Only

Electrical Characteristics PNP Section @ T_A = 25°C unless otherwise specified **R1, R2 Types**

| Characteristic | | Symbol | Min | Typ | Max | Unit | Test Condition |
|-------------------------|----------------------|---------------------|--------------|-----|--------------|------|--|
| Input Voltage | DCX122LH DCX142JH | V _{I(off)} | -0.3 -0.3 | — | — | V | V _{CC} = -5V, I _O = -100μA |
| | DCX122LH DCX142JH | V _{I(on)} | — | — | -2.0 -2.0 | V | V _O = -0.3V, I _O = -20mA V _O = -0.3V, I _O = -20mA |
| Output Voltage | | V _{O(on)} | — | — | -0.3V | V | I _O /I _I = -5mA/-0.25mA |
| Input Current | DCX122LH DCX142JH | I _I | — | — | -28 -13 | mA | V _I = -5V |
| Output Current | | I _{O(off)} | — | — | -0.5 | μA | V _{CC} = -50V, V _I = 0V |
| DC Current Gain | DCX122LH DCX142JH | G _I | 56 56 | — | — | — | V _O = -5V, I _O = -10mA |
| Gain-Bandwidth Product* | | f _T | — | 200 | — | MHz | V _{CE} = -10V, I _E = -5mA, f = 100MHz |

* Transistor - For Reference Only

Electrical Characteristics @ T_A = 25°C unless otherwise specified **R1-Only Types**

| Characteristic | | Symbol | Min | Typ | Max | Unit | Test Condition |
|--------------------------------------|----------------------|----------------------|------------|------------|--------------|------|---|
| Collector-Base Breakdown Voltage | | BV _{CBO} | -50 | — | — | V | I _C = -50μA |
| Collector-Emitter Breakdown Voltage | | BV _{CEO} | -40 | — | — | V | I _C = -1mA |
| Emitter-Base Breakdown Voltage | DCX122TH DCX142TH | BV _{EBO} | -5 | — | — | V | I _E = -50μA I _E = -50μA |
| Collector Cutoff Current | | I _{CBO} | — | — | -0.5 | μA | V _{CB} = -50V |
| Emitter Cutoff Current | DCX122TH DCX142TH | I _{EBO} | — | — | -0.5 -0.5 | μA | V _{EB} = -4V |
| Collector-Emitter Saturation Voltage | | V _{CE(sat)} | — | — | -0.3 | V | I _C = -5mA, I _B = -0.25mA |
| DC Current Transfer Ratio | DCX122TH DCX142TH | h _{FE} | 100 100 | 250 250 | 600 600 | — | I _C = -1mA, V _{CE} = -5V |
| Gain-Bandwidth Product* | | f _T | — | 200 | — | MHz | V _{CE} = -10V, I _E = 5mA, f = 100MHz |

* Transistor - For Reference Only


Ordering Information (Note 4)

| Device | Packaging | Shipping |
|------------|-----------|------------------|
| DCX122LH-7 | SOT-563 | 3000/Tape & Reel |
| DCX142JH-7 | SOT-563 | 3000/Tape & Reel |
| DCX122TH-7 | SOT-563 | 3000/Tape & Reel |
| DCX142TH-7 | SOT-563 | 3000/Tape & Reel |

Notes: 1. If lead-bearing terminal plating is required, please contact your Diodes Inc. sales representative for availability and minimum order details.

4. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



CXX = Product Type Marking Code (See Page 1)

YM = Date Code Marking

Y = Year ex: P = 2003

M = Month ex: 9 = September

Date Code Key

| Year | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 |
|------|------|------|------|------|------|------|------|------|
| Code | N | P | R | S | T | U | V | W |

| Month | Jan | Feb | March | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | O | N | D |

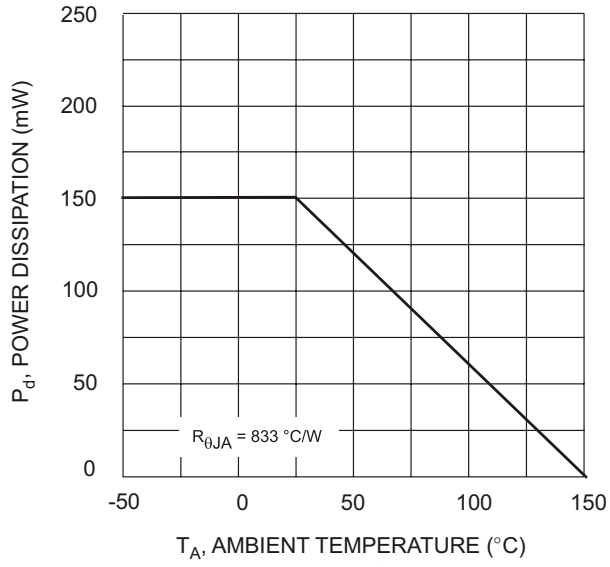


Fig. 1 Derating Curve - Total



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.