


CMR3-02
 CMR3-04
 CMR3-06
 CMR3-10

GENERAL PURPOSE RECTIFIER
3.0 AMP, 200 THRU 1,000 VOLTS



SMC CASE

CentralTM
 Semiconductor Corp.

FEATURES:

- LOW COST
- SPECIAL SELECTIONS AVAILABLE
- HIGH RELIABILITY
- SUPERIOR LOT TO LOT CONSISTENCY
- GLASS PASSIVATED CHIP
- "C" BEND CONSTRUCTION PROVIDES STRAIN RELIEF WHEN MOUNTED ON PC BOARD

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 3.0 Amp Surface Mount Silicon Rectifier is a high quality, well constructed, highly reliable component designed for use in all types of commercial, industrial, entertainment, computer, and automotive applications. To order devices on 16mm Tape and Reel (3000/13" Reel), add TR13 suffix to part number.


MAXIMUM RATINGS: ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

	SYMBOL	CMR3-02	CMR3-04	CMR3-06	CMR3-10	UNITS
Peak Repetitive Reverse Voltage	V_{RRM}	200	400	600	1000	V
DC Blocking Voltage	V_R	200	400	600	1000	V
RMS Reverse Voltage	$V_{R(RMS)}$	140	280	420	700	V
Average Forward Current ($T_A=75^{\circ}\text{C}$)	I_O			3.0		A
Peak Forward Surge Current (8.3ms)	I_{FSM}			200		A
Operating and Storage						
Junction Temperature	T_J, T_{stg}		-65 to +175			$^{\circ}\text{C}$
Thermal Resistance	Θ_{JL}			10		$^{\circ}\text{C}/\text{W}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
V_F	$I_F=3.0\text{A}$		1.2	V
I_R	$V_R=\text{Rated } V_{RRM}$		5.0	μA
I_R	$V_R=\text{Rated } V_{RRM}, T_A=125^{\circ}\text{C}$		250	μA

All dimensions in inches (mm).

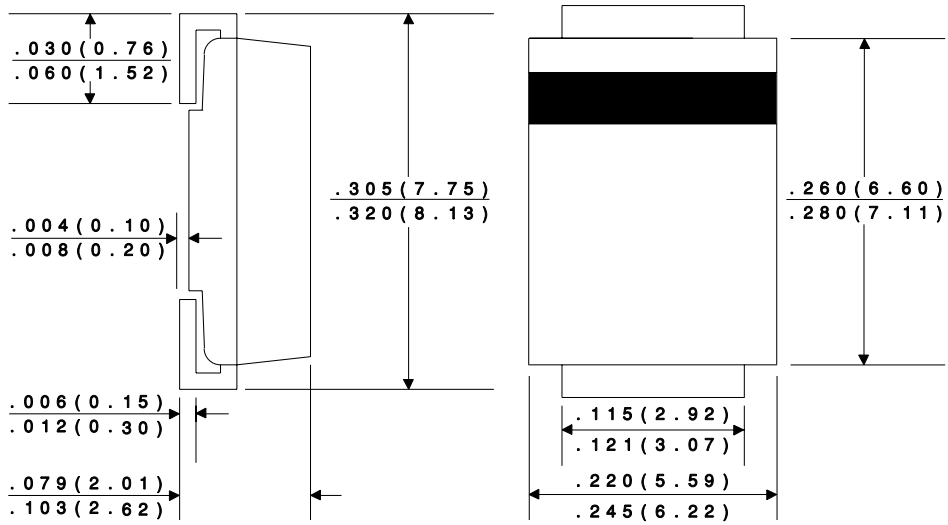

Marking Codes:

DEVICE	MARKING CODE
CMR3-02	C302
CMR3-04	C304
CMR3-06	C306
CMR3-10	C310



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.