

## COMPLEMENTARY NPN/PNP PRE-BIASED SMALL SIGNAL SOT-563 DUAL SURFACE MOUNT TRANSISTOR


NEW PRODUCT

### Features

- Epitaxial Planar Die Construction
- Built-In Biasing Resistors
- Lead-Free Device


### Mechanical Data

- Case: SOT-563, Molded Plastic
- Case material - UL Flammability Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Finish - Matte Tin Solderable per MIL-STD-202, Method 208 (Note 1)
- Terminal Connections: See Diagram
- Weight: 0.005 grams (approx.)

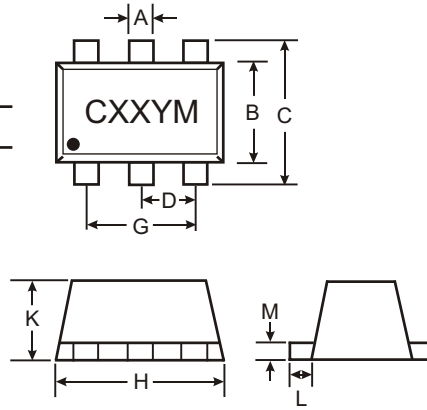

SOT-563			
Dim	Min	Max	Typ
A	0.15	0.30	0.25
B	1.10	1.25	1.20
C	1.55	1.70	1.60
D	0.50		
G	0.90	1.10	1.00
H	1.50	1.70	1.60
K	0.56	0.60	0.60
L	0.15	0.25	0.20
M	0.10	0.18	0.11
All Dimensions in mm			

P/N	R1	R2	MARKING
DCX124EH	22K $\Omega$	22K $\Omega$	C17
DCX144EH	47K $\Omega$	47K $\Omega$	C20
DCX143EH	4.7K $\Omega$	4.7K $\Omega$	C08
DCX114YH	10K $\Omega$	47K $\Omega$	C14
DCX123JH	2.2K $\Omega$	47K $\Omega$	C06
DCX114EH	10K $\Omega$	10K $\Omega$	C13
DCX143TH	4.7K $\Omega$	-	C07
DCX114TH	10K $\Omega$	-	C12

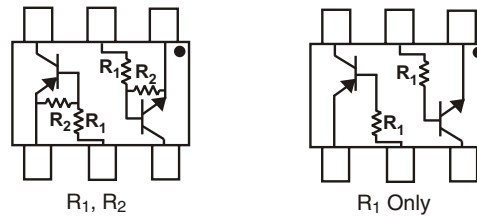

SCHMATIC DIAGRAM, TOP VIEW

### Maximum Ratings NPN Section @ T<sub>A</sub> = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Supply Voltage	V <sub>CC</sub>	50	V
Input Voltage	V <sub>IN</sub>	DCX124EH -10 to +40 DCX144EH -10 to +40 DCX143EH -10 to +30 DCX114YH -6 to +40 DCX123JH -5 to +12 DCX114EH -10 to +40 DCX143TH -5 V <sub>max</sub> DCX114TH -5 V <sub>max</sub>	V
Output Current	I <sub>O</sub>	DCX124EH 30 DCX144EH 30 DCX143EH 100 DCX114YH 70 DCX123JH 100 DCX114EH 50 DCX143TH 100 DCX114TH 100	mA
Output Current	I <sub>C</sub> (Max)	100	mA
Power Dissipation (Total)	P <sub>d</sub>	150	mW
Thermal Resistance, Junction to Ambient Air (Note 2)	R <sub>θJA</sub>	833	°C/W
Operating and Storage and Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150	°C

- Note:
1. If lead-bearing terminal plating is required, please contact your Diodes Inc. sales representative for availability and minimum order details.
  2. Mounted on FR4 Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.

**Maximum Ratings PNP Section** @  $T_A = 25^\circ\text{C}$  unless otherwise specified

Characteristic	Symbol	Value	Unit
Supply Voltage	$V_{CC}$	50	V
Input Voltage DCX124EH DCX144EH DCX143EH DCX114YH DCX123JH DCX114EH DCX143TH DCX114TH	$V_{IN}$	+10 to -40 +10 to -40 +10 to -30 +6 to -40 +5 to -12 +10 to -40 +5 $V_{max}$ +5 $V_{max}$	V
Output Current DCX124EH DCX144EH DCX143EH DCX114YH DCX123JH DCX114EH DCX143TH DCX114TH	$I_O$	-30 -30 -100 -70 -100 -50 -100 -100	mA
Output Current All	$I_C$ (Max)	-100	mA
Power Dissipation (Total)	$P_d$	150	mW
Operating and Storage and Temperature Range	$T_j, T_{STG}$	-55 to +150	$^\circ\text{C}$

**Electrical Characteristics NPN Section** @  $T_A = 25^\circ\text{C}$  unless otherwise specified

Characteristic (DDC143TH & DDC114TH only)	Symbol	Min	Typ	Max	Unit	Test Condition
Collector-Base Breakdown Voltage	$BV_{CBO}$	50	—	—	V	$I_C = 50\mu\text{A}$
Collector-Emitter Breakdown Voltage	$BV_{CEO}$	50	—	—	V	$I_C = 1\text{mA}$
Emitter-Base Breakdown Voltage	$BV_{EBO}$	5	—	—	V	$I_E = 50\mu\text{A}$
Collector Cutoff Current	$I_{CBO}$	—	—	0.5	$\mu\text{A}$	$V_{CB} = 50\text{V}$
Emitter Cutoff Current	$I_{EBO}$	—	—	0.5	$\mu\text{A}$	$V_{EB} = 4\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	—	—	0.3	V	$I_C/I_B = 2.5\text{mA} / 0.25\text{mA}$ DCX143TH $I_C/I_B = 1\text{mA} / 0.1\text{mA}$ DCX114TH
DC Current Transfer Ratio	$h_{FE}$	100	250	600	—	$I_C = 1\text{mA}, V_{CE} = 5\text{V}$
Gain-Bandwidth Product*	$f_T$	—	250	—	MHz	$V_{CE} = 10\text{V}, I_E = -5\text{mA}, f = 100\text{MHz}$

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Input Voltage DCX124EH DCX144EH DCX143EH DCX114YH DCX123JH DCX114EH	$V_{I(off)}$	0.5	1.1	—	V	$V_{CC} = 5\text{V}, I_O = 100\mu\text{A}$
		0.5	1.1	—		
Input Voltage DCX124EH DCX144EH DCX143EH DCX114YH DCX123JH DCX114EH	$V_{I(on)}$	—	1.9	3.0	V	$V_O = 0.3\text{V}, I_O = 5\text{mA}$ $V_O = 0.3\text{V}, I_O = 2\text{mA}$ $V_O = 0.3\text{V}, I_O = 20\text{mA}$ $V_O = 0.3\text{V}, I_O = 1\text{mA}$ $V_O = 0.3\text{V}, I_O = 5\text{mA}$ $V_O = 0.3\text{V}, I_O = 10\text{mA}$
		—	1.9	3.0		
Output Voltage DCX124EH DCX144EH DCX143EH DCX114YH DCX123JH DCX114EH	$V_{O(on)}$	—	0.1	0.3	V	$I_O/I_I = 10\text{mA} / 0.5\text{mA}$ $I_O/I_I = 10\text{mA} / 0.5\text{mA}$ $I_O/I_I = 10\text{mA} / 0.5\text{mA}$ $I_O/I_I = 5\text{mA} / 0.25\text{mA}$ $I_O/I_I = 5\text{mA} / 0.25\text{mA}$ $I_O/I_I = 10\text{mA} / 0.5\text{mA}$
Input Current DCX124EH DCX144EH DCX143EH DCX114YH DCX123JH DCX114EH	$I_I$	—	—	0.36 0.18 1.8 0.88 3.6 0.88	mA	$V_I = 5\text{V}$
Output Current	$I_{O(off)}$	—	—	0.5	$\mu\text{A}$	$V_{CC} = 50\text{V}, V_I = 0\text{V}$
DC Current Gain DCX124EH DCX144EH DCX143EH DCX114YH DCX123JH DCX114EH	$G_I$	56 68 20 68 80 30	—	—	—	$V_O = 5\text{V}, I_O = 5\text{mA}$ $V_O = 5\text{V}, I_O = 5\text{mA}$ $V_O = 5\text{V}, I_O = 10\text{mA}$ $V_O = 5\text{V}, I_O = 10\text{mA}$ $V_O = 5\text{V}, I_O = 10\text{mA}$ $V_O = 5\text{V}, I_O = 5\text{mA}$

\* Transistor - For Reference Only

**Electrical Characteristics PNP Section** @  $T_A = 25^\circ\text{C}$  unless otherwise specified

Characteristic (DCX143TH & DCX114TH only)	Symbol	Min	Typ	Max	Unit	Test Condition
Collector-Base Breakdown Voltage	$BV_{CBO}$	-50	—	—	V	$I_C = -50\mu\text{A}$
Collector-Emitter Breakdown Voltage	$BV_{CEO}$	-50	—	—	V	$I_C = -1\text{mA}$
Emitter-Base Breakdown Voltage	$BV_{EBO}$	-5	—	—	V	$I_E = -50\mu\text{A}$
Collector Cutoff Current	$I_{CBO}$	—	—	-0.5	$\mu\text{A}$	$V_{CB} = -50\text{V}$
Emitter Cutoff Current	$I_{EBO}$	—	—	-0.5	$\mu\text{A}$	$V_{EB} = -4\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	—	—	-0.3	V	$I_C/I_B = 2.5\text{mA} / 0.25\text{mA}$ DCX143TH $I_C/I_B = 1\text{mA} / 0.1\text{mA}$ DCX114TH
DC Current Transfer Ratio	$h_{FE}$	100	250	600	—	$I_C = -1\text{mA}, V_{CE} = -5\text{V}$
Gain-Bandwidth Product*	$f_T$	—	250	—	MHz	$V_{CE} = -10\text{V}, I_E = 5\text{mA}, f = 100\text{MHz}$


Characteristic		Symbol	Min	Typ	Max	Unit	Test Condition
Input Voltage	DCX124EH DCX144EH DCX143EH DCX114YH DCX123JH DCX114EH	$V_{I(off)}$	-0.5 -0.5 -0.5 -0.3 -0.5 -0.5	-1.1 -1.1 -1.1 — — -1.1	—	—	$V_{CC} = -5\text{V}, I_O = -100\mu\text{A}$
	DCX124EH DCX144EH DCX143EH DCX114YH DCX123JH DCX114EH	$V_{I(on)}$	—	-1.9 -1.9 -1.9 — — -1.9	-3.0 -3.0 -3.0 -1.4 -1.1 -3.0	V	$V_O = -0.3\text{V}, I_O = -5\text{mA}$ $V_O = -0.3\text{V}, I_O = -2\text{mA}$ $V_O = -0.3\text{V}, I_O = -20\text{mA}$ $V_O = -0.3\text{V}, I_O = -1\text{mA}$ $V_O = -0.3\text{V}, I_O = -5\text{mA}$ $V_O = -0.3\text{V}, I_O = -10\text{mA}$
Output Voltage	DCX124EH DCX144EH DCX143EH DCX114YH DCX123JH DCX114EH	$V_{O(on)}$	—	-0.1	-0.3	V	$I_O/I_I = -10\text{mA} / -0.5\text{mA}$ $I_O/I_I = -10\text{mA} / -0.5\text{mA}$ $I_O/I_I = -10\text{mA} / -0.5\text{mA}$ $I_O/I_I = -5\text{mA} / -0.25\text{mA}$ $I_O/I_I = -5\text{mA} / -0.25\text{mA}$ $I_O/I_I = -10\text{mA} / -0.5\text{mA}$
Input Current	DCX124EH DCX144EH DCX143EH DCX114YH DCX123JH DCX114EH	$I_I$	—	—	-0.36 -0.18 -1.8 -0.88 -3.6 -0.88	mA	$V_I = -5\text{V}$
Output Current		$I_{O(off)}$	—	—	-0.5	$\mu\text{A}$	$V_{CC} = 50\text{V}, V_I = 0\text{V}$
DC Current Gain	DCX124EH DCX144EH DCX143EH DCX114YH DCX123JH DCX114EH	$G_I$	56 68 20 68 80 30	—	—	—	$V_O = -5\text{V}, I_O = -5\text{mA}$ $V_O = -5\text{V}, I_O = -5\text{mA}$ $V_O = -5\text{V}, I_O = -10\text{mA}$ $V_O = -5\text{V}, I_O = -10\text{mA}$ $V_O = -5\text{V}, I_O = -10\text{mA}$ $V_O = -5\text{V}, I_O = -5\text{mA}$
Gain-Bandwidth Product*		$f_T$	—	250	—	MHz	$V_{CE} = -10\text{V}, I_E = -5\text{mA}, f = 100\text{MHz}$

\* Transistor - For Reference Only

**Ordering Information** (Note 3)

Device	Packaging	Shipping
DCX124EH-7	SOT-563	3000/Tape & Reel
DCX144EH-7	SOT-563	3000/Tape & Reel
DCX143EH-7	SOT-563	3000/Tape & Reel
DCX114YH-7	SOT-563	3000/Tape & Reel
DCX123JH-7	SOT-563	3000/Tape & Reel
DCX114EH-7	SOT-563	3000/Tape & Reel
DCX143TH-7	SOT-563	3000/Tape & Reel
DCX114TH-7	SOT-563	3000/Tape & Reel

Notes: 3. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

**Marking Information**


CXX = Product Type Marking Code (See Page 1)  
 YM = Date Code Marking  
 Y = Year ex: P = 2003  
 M = Month ex: 9 = September

Date Code Key

Year	2003	2004	2005	2006	2007	2008	2009
Code	P	R	S	T	U	V	W

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

**TYPICAL CURVES - DCX143EH NPN SECTION**

NEW PRODUCT

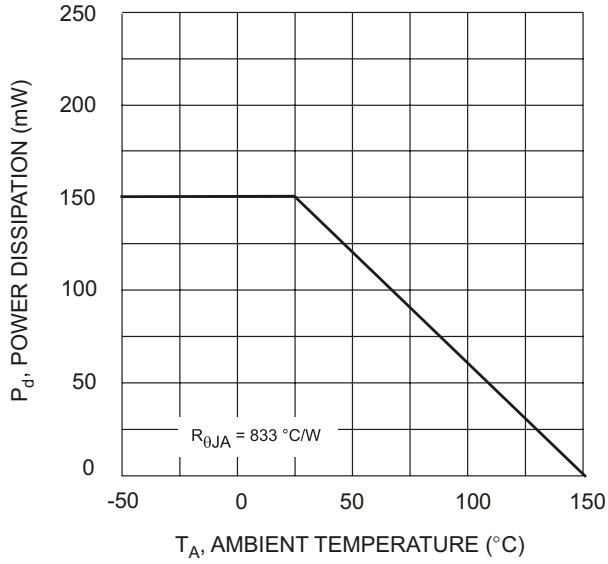


Fig. 1 Derating Curve - Total

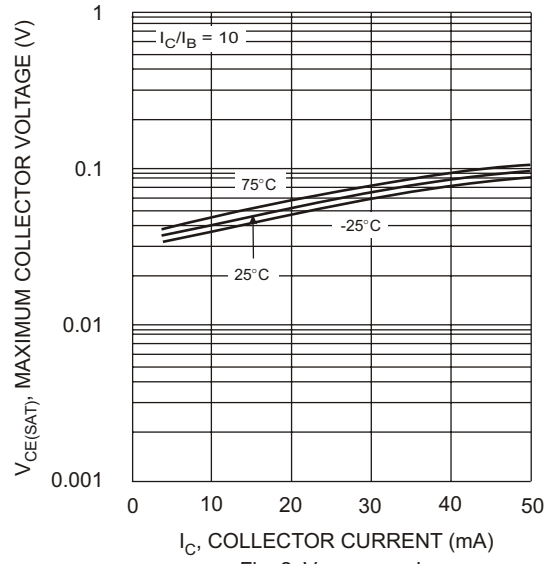


Fig. 2  $V_{CE(SAT)}$  vs.  $I_C$

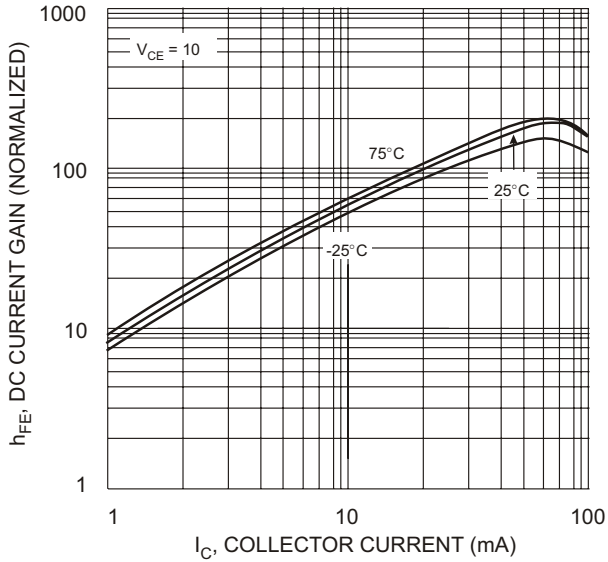


Fig. 3 DC CURRENT GAIN

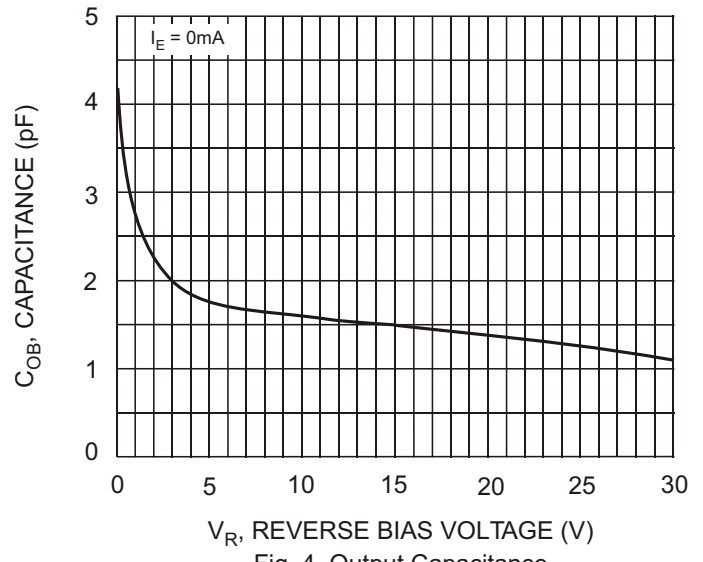


Fig. 4 Output Capacitance

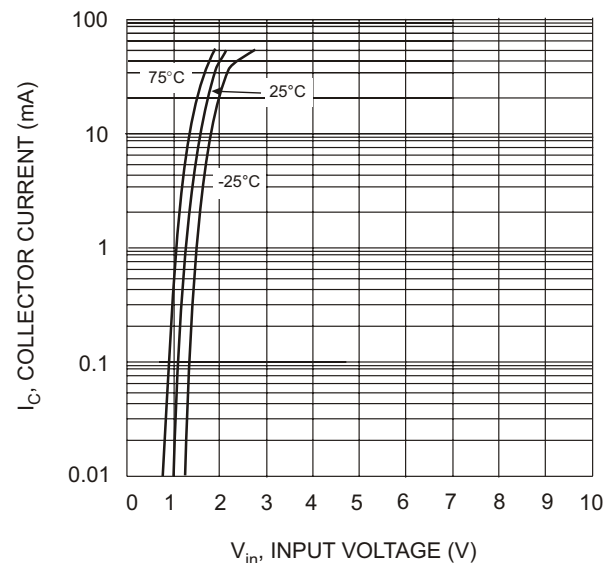


Fig. 5 Collector Current Vs. Input Voltage

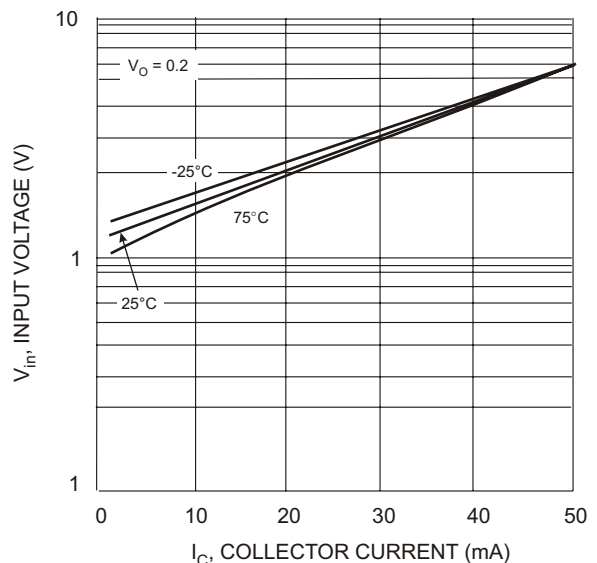


Fig. 6 Input Voltage vs. Collector Current

**TYPICAL CURVES - DCX143EH PNP SECTION**

**NEW PRODUCT**

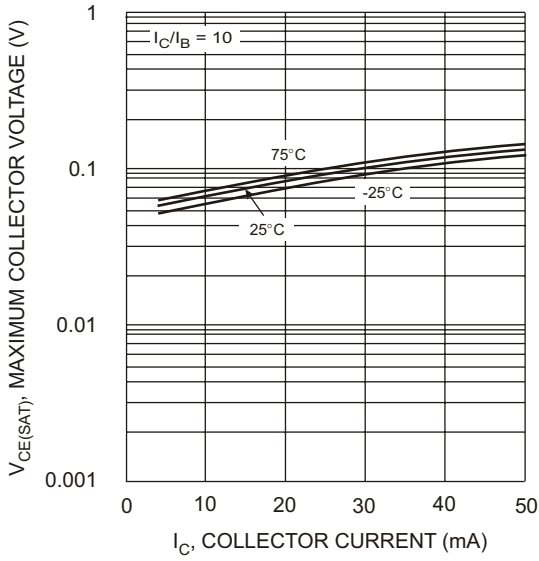


Fig. 7  $V_{CE(SAT)}$  vs.  $I_C$

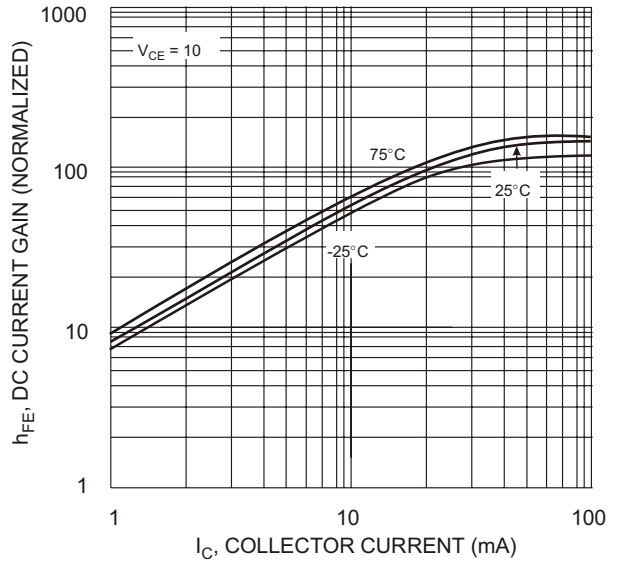


Fig. 8 DC Current Gain

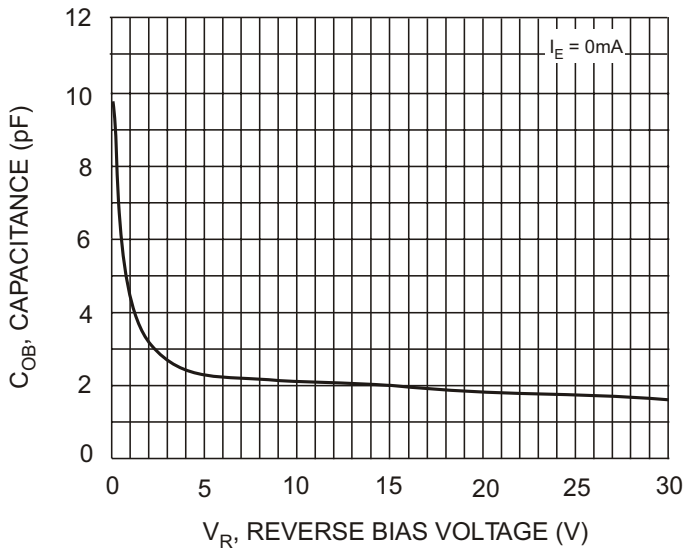


Fig. 9 Output Capacitance

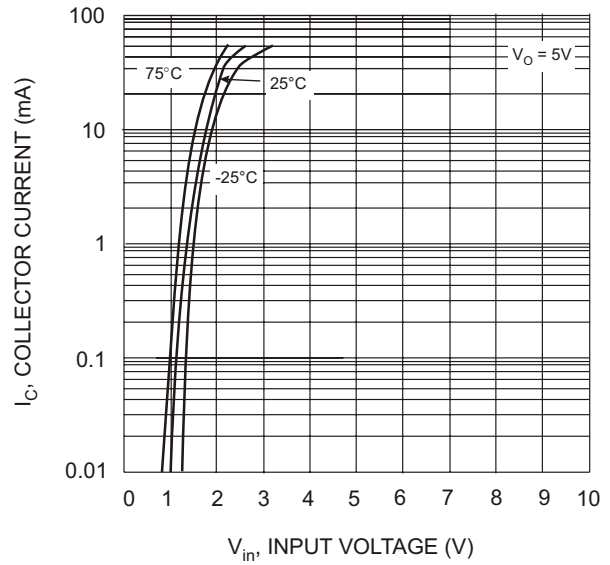


Fig. 10 Collector Current Vs. Input Voltage

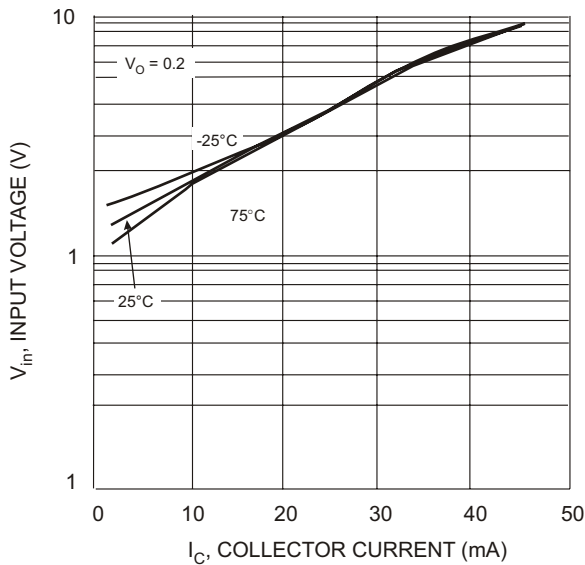


Fig. 11 Input Voltage vs. Collector Current



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.