

**CMHZ4099
THRU
CMHZ4125**

**LOW NOISE ZENER DIODE
6.8 VOLTS THRU 47 VOLTS
500mW, 5% TOLERANCE**



SOD-123 CASE

CentralTM
Semiconductor Corp.

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMHZ4099 Series types are high quality Silicon Zener Diodes designed for low leakage, low current and low noise applications.

MAXIMUM RATINGS:

Power Dissipation (@ $T_A=25^\circ\text{C}$)
Operating and Storage Temperature

SYMBOL

P_D 500
 T_J, T_{stg} -65 to +200

UNIT

mW
 $^\circ\text{C}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$) $V_F=1.0\text{V MAX @ } I_F=200\text{mA FOR ALL TYPES}$)

TYPE NO.	ZENER VOLTAGE			TEST CURRENT	MAXIMUM ZENER IMPEDANCE	MAX REVERSE LEAKAGE CURRENT		MAXIMUM ZENER CURRENT	MAXIMUM NOISE DENSITY	MARKING CODE
	$V_Z @ I_{ZT}$					I_{ZT}	$Z_{ZT} @ I_{ZT}$			
	MIN	NOM	MAX							
	VOLTS	VOLTS	VOLTS	μA	Ω	μA	VOLTS	mA	$\sqrt{\mu\text{V/Hz}}$	
CMHZ4099*	6.460	6.8	7.140	250	200	10	5.2	35.0	40	CHX
CMHZ4100*	7.125	7.5	7.865	250	200	10	5.7	31.8	40	CHY
CMHZ4101*	7.790	8.2	8.610	250	200	1.0	6.3	29.0	40	CHZ
CMHZ4102*	8.265	8.7	9.135	250	200	1.0	6.7	27.4	40	CJC
CMHZ4103*	8.645	9.1	9.555	250	200	1.0	7.0	26.2	40	CJD
CMHZ4104*	9.500	10	10.50	250	200	1.0	7.6	24.8	40	CJE
CMHZ4105*	10.45	11	11.55	250	200	0.05	8.5	21.6	40	CJF
CMHZ4106*	11.40	12	12.60	250	200	0.05	9.2	20.4	40	CJH
CMHZ4107*	12.35	13	13.65	250	200	0.05	9.9	19.0	40	CJJ
CMHZ4108*	13.30	14	14.70	250	200	0.05	10.7	17.5	40	CJK
CMHZ4109*	14.25	15	15.75	250	100	0.05	11.4	16.3	40	CJM
CMHZ4110*	15.20	16	16.80	250	100	0.05	12.2	15.4	40	CJN
CMHZ4111*	16.15	17	17.85	250	100	0.05	13.0	14.5	40	CJP
CMHZ4112*	17.10	18	18.90	250	100	0.05	13.7	13.2	40	CJT
CMHZ4113*	18.05	19	19.95	250	150	0.05	14.5	12.5	40	CJU
CMHZ4114*	19.00	20	21.00	250	150	0.01	15.2	11.9	40	CJV
CMHZ4115*	20.90	22	23.10	250	150	0.01	16.8	10.8	40	CJA

* Available on special order only, please consult factory

R0 (29-August 2001)

LOW NOISE ZENER DIODE
6.8 VOLTS THRU 47 VOLTS
500mW, 5% TOLERANCE


ELECTRICAL CHARACTERISTICS:

($T_A=25^\circ\text{C}$) $V_F=1.0\text{V MAX @ } I_F=200\text{mA}$ FOR ALL TYPES)

TYPE NO.	ZENER VOLTAGE			TEST CURRENT	MAXIMUM ZENER IMPEDANCE	MAX REVERSE LEAKAGE CURRENT		MAXIMUM ZENER CURRENT	MAXIMUM NOISE DENSITY	MARKING CODE
	$V_Z @ I_{ZT}$			I_{ZT}	$Z_{ZT} @ I_{ZT}$	$I_R @ V_R$		I_{ZM}	$N_D @ I_{ZT}$	
	MIN	NOM	MAX							
	VOLTS	VOLTS	VOLTS	μA	Ω	μA	VOLTS	mA	$\sqrt{\mu\text{V/Hz}}$	
CMHZ4116*	22.80	24	25.20	250	150	0.01	18.3	9.9	40	CJZ
CMHZ4117*	23.75	25	26.25	250	150	0.01	19.0	9.5	40	CJY
CMHZ4118*	25.65	27	28.35	250	150	0.01	20.5	8.8	40	CKA
CMHZ4119*	26.60	28	29.40	250	200	0.01	21.3	8.5	40	CKC
CMHZ4120*	28.50	30	31.50	250	200	0.01	22.8	7.9	40	CKD
CMHZ4121*	31.35	33	34.65	250	200	0.01	25.1	7.2	40	CKE
CMHZ4122*	34.20	36	37.80	250	200	0.01	27.4	6.6	40	CKF
CMHZ4123*	37.05	39	40.95	250	200	0.01	29.7	6.1	40	CKH
CMHZ4124*	40.85	43	45.15	250	250	0.01	32.7	5.5	40	CKJ
CMHZ4125*	44.65	47	49.35	250	250	0.01	35.8	5.1	40	CKL

* Available on special order only, please consult factory

SOD-123 CASE - MECHANICAL OUTLINE

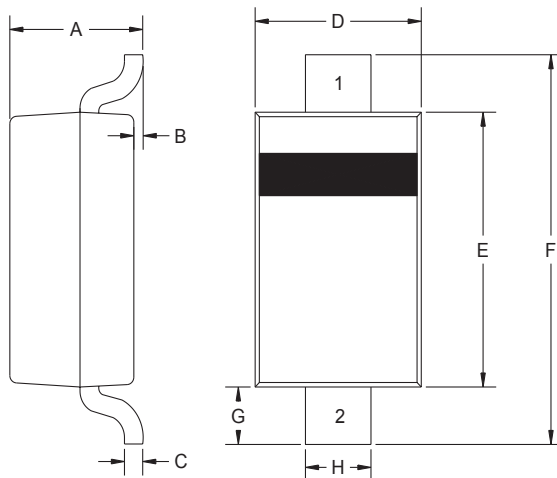

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.037	0.053	0.95	1.35
B	-	0.005	-	0.12
C	-	0.008	-	0.20
D	0.055	0.071	1.40	1.80
E	0.098	0.112	2.50	2.84
F	0.140	0.154	3.55	3.90
G	0.010	-	0.25	-
H	0.020	0.028	0.50	0.70

SOD-123 (REV:R3)

Lead Code:

- 1) Cathode
- 2) Anode

R3

R0 (29-August 2001)



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.