


### Single IGBTMOD™ H-Series Module 1200 Amperes/1200 Volts

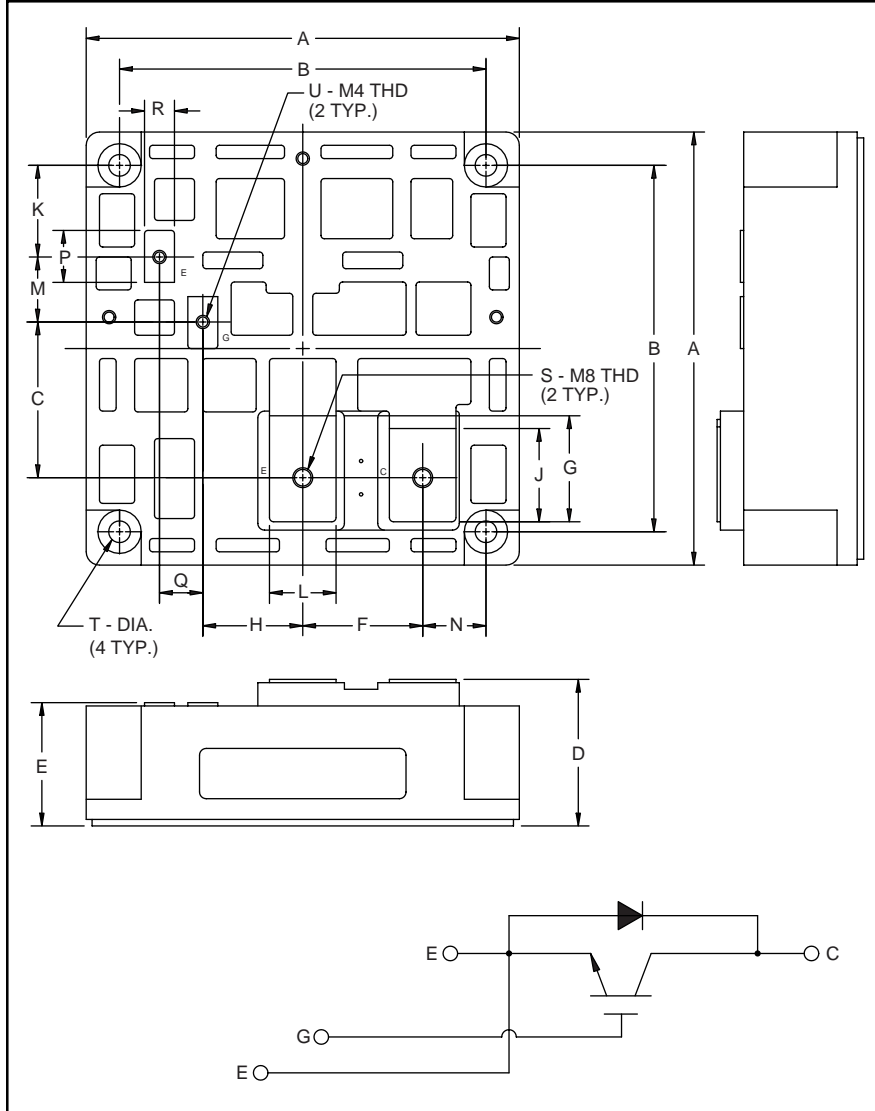

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	5.12	130.0
B	4.33±0.01	110.0±0.25
C	1.840	46.75
D	1.73±0.04/0.02	44.0±1.0/0.5
E	1.46±0.04/0.02	37.0±1.0/0.5
F	1.42	36.0
G	1.25	31.8
H	1.18	30.0
J	1.10	28.0
K	1.08	27.5

Dimensions	Inches	Millimeters
L	0.79	20.0
M	0.77	19.5
N	0.75	19.0
P	0.61	15.6
Q	0.51	13.0
R	0.35	9.0
S	M8 Metric	M8
T	0.26 Dia.	Dia. 6.5
U	M4 Metric	M4



#### Description:

Powerex IGBTMOD™ Modules are designed for use in switching applications. Each module consists of one IGBT Transistor in a single configuration with a reverse-connected super-fast recovery free-wheel diode. All components and interconnects are isolated from the heat sinking baseplate, offering simplified system assembly and thermal management.

#### Features:

- Low Drive Power
- Low  $V_{CE(sat)}$
- Discrete Super-Fast Recovery Free-Wheel Diode
- Isolated Baseplate for Easy Heat Sinking

#### Applications:

- AC Motor Control
- Motion/Servo Control
- UPS
- Welding Power Supplies
- Laser Power Supplies

#### Ordering Information:

Example: Select the complete part module number you desire from the table below -i.e. CM1200HA-24J is a 1200V ( $V_{CES}$ ), 1200 Ampere Single IGBTMOD™ Power Module.

Type	Current Rating Amperes	$V_{CES}$ Volts (x 50)
CM	1200	24



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**CM1200HA-24J**  
**Single IGBTMOD™ H-Series Module**  
 1200 Amperes/1200 Volts

**Absolute Maximum Ratings,  $T_j = 25\text{ }^\circ\text{C}$  unless otherwise specified**

Ratings	Symbol	CM1200HA-24J	Units
Junction Temperature	$T_j$	-40 to +150	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-40 to +125	$^\circ\text{C}$
Collector-Emitter Voltage (G-E SHORT)	$V_{CES}$	1200	Volts
Gate-Emitter Voltage (C-E SHORT)	$V_{GES}$	$\pm 20$	Volts
Collector Current ( $T_c = 25^\circ\text{C}$ )	$I_C$	1200	Amperes
Peak Collector Current ( $T_j \leq 150^\circ\text{C}$ )	$I_{CM}$	2400*	Amperes
Emitter Current** ( $T_c = 25^\circ\text{C}$ )	$I_E$	1200	Amperes
Peak Emitter Current** ( $T_j \leq 150^\circ\text{C}$ )	$I_{EM}$	2400*	Amperes
Maximum Collector Dissipation ( $T_c = 25^\circ\text{C}$ ) ( $T_j < 150^\circ\text{C}$ )	$P_C$	5800	Watts
Max. Mounting Torque M8 Terminal Screws	-	95	in-lb
Max. Mounting Torque M6 Mounting Screws	-	40	in-lb
Mounting Torque G(E) Terminal M4	-	15	in-lb
Module Weight (Typical)	-	1600	Grams
Isolation Voltage, Main Terminal to Base Plate, AC 1 Min.	$V_{iso}$	2500	Volts

**Static Electrical Characteristics,  $T_j = 25\text{ }^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Collector-Cutoff Current	$I_{CES}$	$V_{CE} = V_{CES}, V_{GE} = 0V$	-	-	6	mA
Gate Leakage Current	$I_{GES}$	$V_{GE} = V_{CES}, V_{CE} = 0V$	-	-	0.5	$\mu\text{A}$
Gate-Emitter Threshold Voltage	$V_{GE(th)}$	$I_C = 120\text{mA}, V_{CE} = 10V$	4.5	6.0	7.5	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 1200\text{A}, V_{GE} = 15V, T_j = 25^\circ\text{C}$	-	2.4	3.1	Volts
		$I_C = 1200\text{A}, V_{GE} = 15V, T_j = 125^\circ\text{C}$	-	2.5	-	Volts
Total Gate Charge	$Q_G$	$V_{CC} = 600V, I_C = 1200\text{A}, V_{GE} = 15V$	-	5000	-	nC
Emitter Current Voltage**	$V_{EC}$	$I_E = 1200\text{A}, V_{GE} = 0V$	-	-	3.7	Volts

**Dynamic Electrical Characteristics,  $T_j = 25\text{ }^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units	
Input Capacitance	$C_{ies}$		-	-	200	nF	
Output Capacitance	$C_{oes}$	$V_{GE} = 0V, V_{CE} = 10V$	-	-	70	nF	
Reverse Transfer Capacitance	$C_{res}$		-	-	40	nF	
Resistive	Turn-on Delay Time	$t_{d(on)}$	$V_{CC} = 600V, I_C = 1200\text{A},$	-	-	600	ns
Load	Rise Time	$t_r$	$V_{GE1} = V_{GE2} = 15V,$	-	-	1800	ns
Switching	Turn-off Delay Time	$t_{d(off)}$	$R_G = 3.3\Omega, \text{Resistive}$	-	-	1200	ns
Time	Fall Time	$t_f$	Load Switching Operation	-	-	1500	ns
Diode Reverse Recovery Time**	$t_{rr}$	$I_E = 1200\text{A}, di_E/dt = -2400\text{A}/\mu\text{s}$	-	-	300	ns	
Diode Reverse Recovery Charge**	$Q_{rr}$	$I_E = 1200\text{A}, di_E/dt = -2400\text{A}/\mu\text{s}$	-	9.0	-	$\mu\text{C}$	

**Thermal and Mechanical Characteristics,  $T_j = 25\text{ }^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance, Junction to Case**	$R_{th(j-c)Q}$	Per IGBT	-	-	0.022	$^\circ\text{C}/\text{W}$
Thermal Resistance, Junction to Case**	$R_{th(j-c)R}$	Per FWDi	-	-	0.050	$^\circ\text{C}/\text{W}$
Contact Thermal Resistance	$R_{th(c-f)}$	Per Module, Thermal Grease Applied	-	-	0.018	$^\circ\text{C}/\text{W}$










\* Pulse width and repetition rate should be such that device junction temperature ( $T_j$ ) does not exceed  $T_{j(max)}$  rating.

\*\*Represents characteristics of the anti-parallel, emitter-to-collector free-wheel diode (FWDi).



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272


**CM1200HA-24J**  
**Single IGBTMOD™ H-Series Module**  
 1200 Amperes/1200 Volts

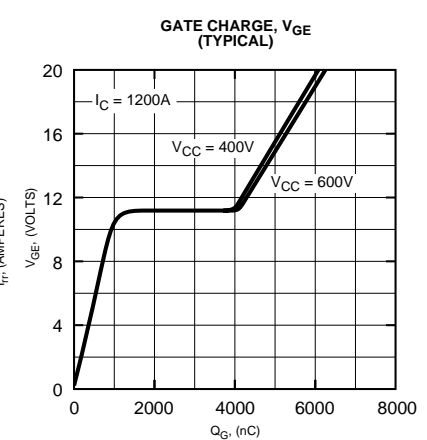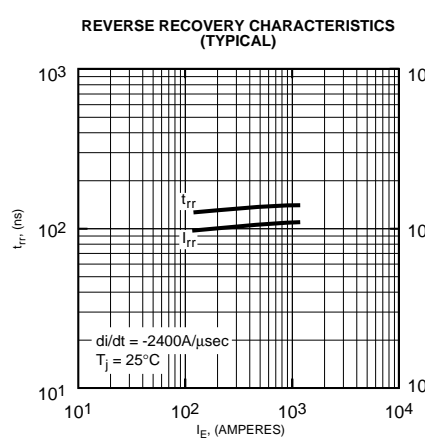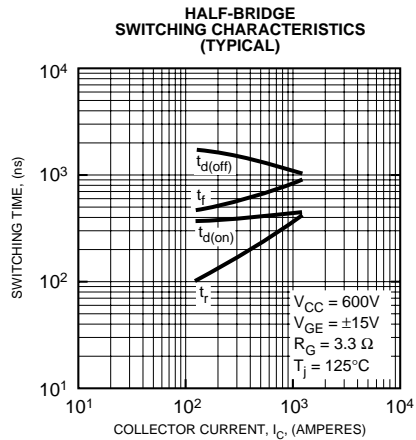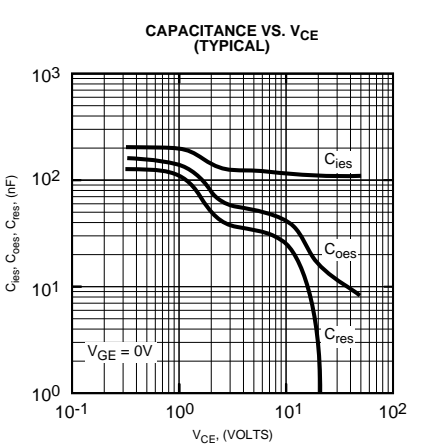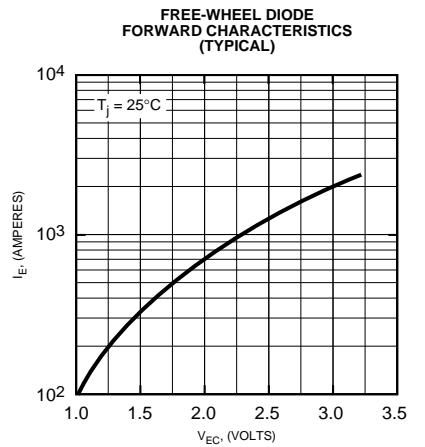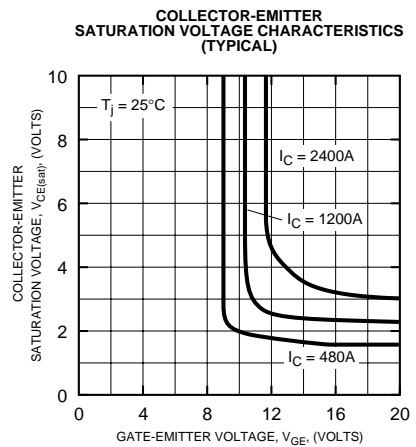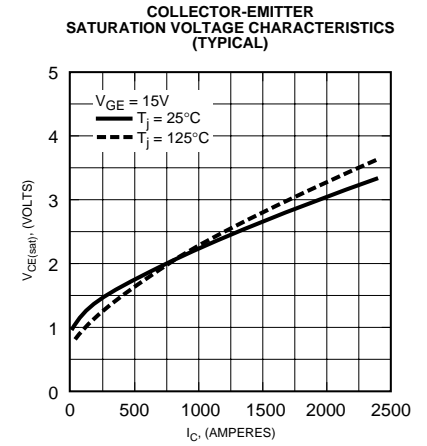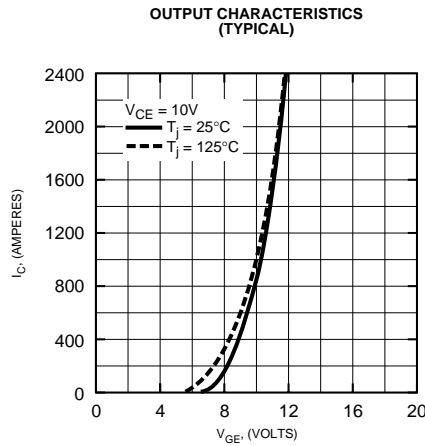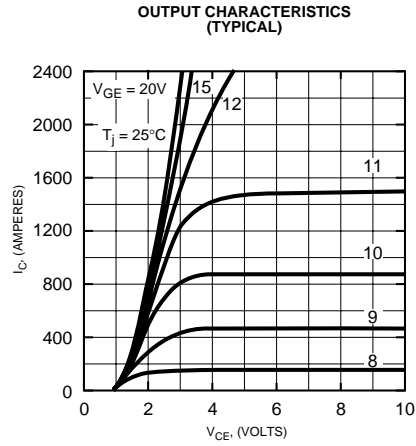



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**CM1200HA-24J**  
**Single IGBTMOD™ H-Series Module**  
1200 Amperes/1200 Volts

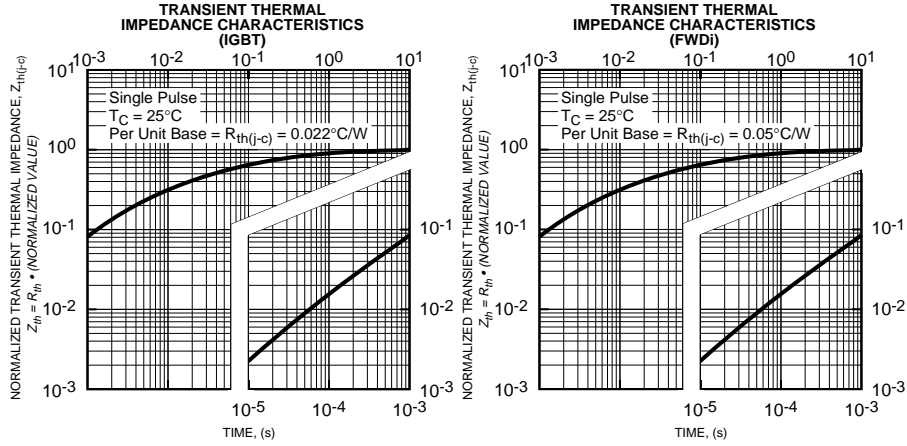



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

**[LittleDiode.com](http://LittleDiode.com)**

Looking forward to providing you with the best possible service.