

MITSUBISHI IGBT MODULES
CM20AD00-12H

MEDIUM POWER SWITCHING USE
 FLAT BASE, INSULATED TYPE

CM20AD00-12H




- IC 20A
 - VCES 600V
 - Insulated Type
 - CIB Module
- 3φ Inverter + 3φ Converter + Brake
 Thyristor + Thermistor + Current shunt resistor

APPLICATION

AC & DC motor controls, General purpose inverters

OUTLINE DRAWING & CIRCUIT DIAGRAM

Dimensions in mm

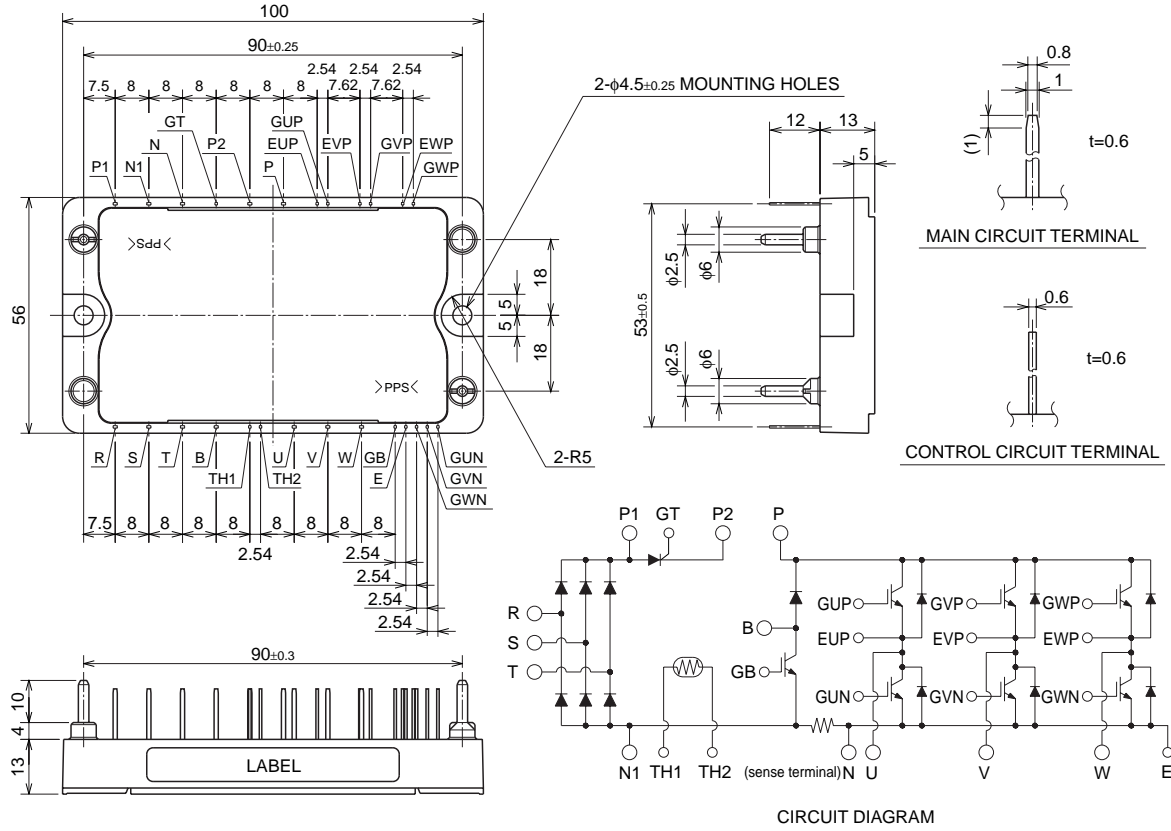

CM20AD00-12H

MEDIUM POWER SWITCHING USE
FLAT BASE, INSULATED TYPE

MAXIMUM RATINGS (T_J = 25°C)

INVERTER PART

Symbol	Parameter	Conditions	Rating	Unit
V _{CES}	Collector-emitter voltage	G-E Short	600	V
V _{GES}	Gate-emitter voltage	C-E Short	±20	V
I _C	Collector Current	T _C = 25°C	20	A
I _{CM}		PULSE (Note. 2)	40	A
I _E (Note.1)	Emitter Current	T _C = 25°C	20	A
I _{EM} (Note.1)		PULSE (Note. 2)	40	A
P _C (Note.3)	Maximum collector dissipation	T _C = 25°C	62	W

BRAKE PART

Symbol	Parameter	Conditions	Rating	Unit
V _{CES}	Collector-emitter voltage	G-E Short	600	V
V _{GES}	Gate-emitter voltage	C-E Short	±20	V
I _C	Collector Current	T _C = 25°C	20	A
I _{CM}		PULSE (Note. 2)	40	A
P _C (Note.3)	Maximum collector dissipation	T _C = 25°C	59	W
V _{RRM}	Repetitive peak reverse voltage	Clamp diode part	600	V
I _{FM} (Note.3)	Forward current	Clamp diode part	20	A

CONVERTER PART

Symbol	Parameter	Conditions	Rating	Unit
V _{RRM}	Repetitive peak reverse voltage		800	V
E _a	Recommended AC input voltage		220	V
I _O	DC output current	3φ rectifying circuit	20	A
I _{FSM}	Surge (non-repetitive) forward current	1/2 cycle at 60Hz, peak value, Non-repetitive	200	A
I ² t	I ² t for fusing	Value for one cycle of surge current	165	A ² s

THYRISTOR PART

Symbol	Parameter	Conditions	Rating	Unit
V _{DRM}	Repetitive peak off-state voltage		800	V
V _{RRM}	Repetitive peak reverse voltage		800	V
I _{T(AV)}	Average on-state current	Single-phase, half-wave 180° conduction	20	A
I _{TSM}	Surge (non-repetitive) on-state current	1/2 cycle at 60Hz, peak value Non-repetitive	200	A
P _{GM}	Peak gate power dissipation		10	W
P _{G(AV)}	Average gate power dissipation		1	W
I _{FGM}	Peak gate forward current		3	A
V _{FGM}	Peak gate forward voltage		10	V
V _{RGM}	Peak gate reverse voltage		5	V
di/dt	Critical rate of rise of on-state Current	I _G =100mA, V _D =400V, dI _G /dt=1A/μs	100	A/μs

COMMON RATING

Symbol	Parameter	Conditions	Rating	Unit
T _j	Junction temperature	Inverter, brake, converter part	-40 ~ +150	°C
T _j	Junction temperature	Thyristor part	-40 ~ +125	°C
T _{stg}	Storage temperature		-40 ~ +125	°C
V _{iso}	Isolation voltage	AC 1 min.	2500	V
—	Mounting torque	Mounting M4 screw	1.47 ~ 1.96	N·m
—	Weight	Typical value	120	g

CM20AD00-12H

MEDIUM POWER SWITCHING USE
FLAT BASE, INSULATED TYPE

**ELECTRICAL CHARACTERISTICS (T_j = 25°C)
INVERTER PART**

Symbol	Parameter	Test conditions	Limits			Unit		
			Min.	Typ.	Max.			
ICES	Collector cutoff current	VCE = VCES, VGE = 0V	—	—	1	mA		
VGE(th)	Gate-emitter threshold voltage	IC = 2.0mA, VCE = 10V	4.5	6	7.5	V		
IGES	Gate-emitter cutoff current	VGE = VGES, VCE = 0V	—	—	0.5	μA		
VCE(sat)	Collector-emitter saturation voltage	T _j = 25°C T _j = 150°C	IC = 20A, VGE = 15V	(Note.4)	—	2.1	2.8	V
					—	2.15	—	
Cies	Input capacitance	VCE = 10V VGE = 0V	—	—	2.0	nF		
Coes	Output capacitance		—	—	1.5	nF		
Cres	Reverse transfer capacitance		—	—	0.4	nF		
QG	Total gate charge	VCC = 300V, IC = 20A, VGE = 15V	—	60	—	nC		
td(on)	Turn-on delay time	VCC = 300V, IC = 20A	—	—	120	ns		
tr	Turn-on rise time	VGE1 = VGE2 = 15V	—	—	300	ns		
td(off)	Turn-off delay time	RG = 31Ω	—	—	200	ns		
tf	Turn-off fall time	Resistive load	—	—	300	ns		
VEC(Note.1)	Emitter-collector voltage	IE = 20A, VGE = 0V	—	—	2.8	V		
trr (Note.1)	Reverse recovery time	IE = 20A, VGE = 0V	—	—	110	ns		
Qrr (Note.1)	Reverse recovery charge	diE / dt = - 40A / μs	—	0.05	—	μC		
Rth(j-c)Q	Thermal resistance	IGBT part, Per 1/6 module	—	—	2.0	°C/W		
Rth(j-c)R		FWDi part, Per 1/6 module	—	—	3.1	°C/W		

BRAKE PART

Symbol	Parameter	Test conditions	Limits			Unit		
			Min.	Typ.	Max.			
ICES	Collector cutoff current	VCE = VCES, VGE = 0V	—	—	1	mA		
VGE(th)	Gate-emitter threshold voltage	IC = 2.0mA, VCE = 10V	4.5	6	7.5	V		
IGES	Gate-emitter cutoff current	VGE = VGES, VCE = 0V	—	—	0.5	μA		
VCE(sat)	Collector-emitter saturation voltage	T _j = 25°C T _j = 150°C	IC = 20A, VGE = 15V	(Note.4)	—	2.1	2.8	V
					—	2.15	—	
Cies	Input capacitance	VCE = 10V VGE = 0V	—	—	2.0	nF		
Coes	Output capacitance		—	—	1.5	nF		
Cres	Reverse transfer capacitance		—	—	0.4	nF		
QG	Total gate charge	VCC = 300V, IC = 20A, VGE = 15V	—	60	—	nC		
VFM	Forward voltage drop	IF = 20A, Clamp diode part	—	—	2.8	V		
Rth(j-c)Q	Thermal resistance	IGBT part	—	—	2.1	°C/W		
Rth(j-c)R		Clamp diode part	—	—	3.2	°C/W		

CONVERTER PART

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
IRRM	Repetitive reverse current	VR = VRRM, T _j = 150°C	—	—	8	mA
VFM	Forward voltage drop	IF = 20A	—	—	1.5	V
Rth(j-c)	Thermal resistance	Per 1/6 module	—	—	3.1	°C/W



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.