


Dual IGBTMOD™ U-Series Module 800 Amperes/600 Volts

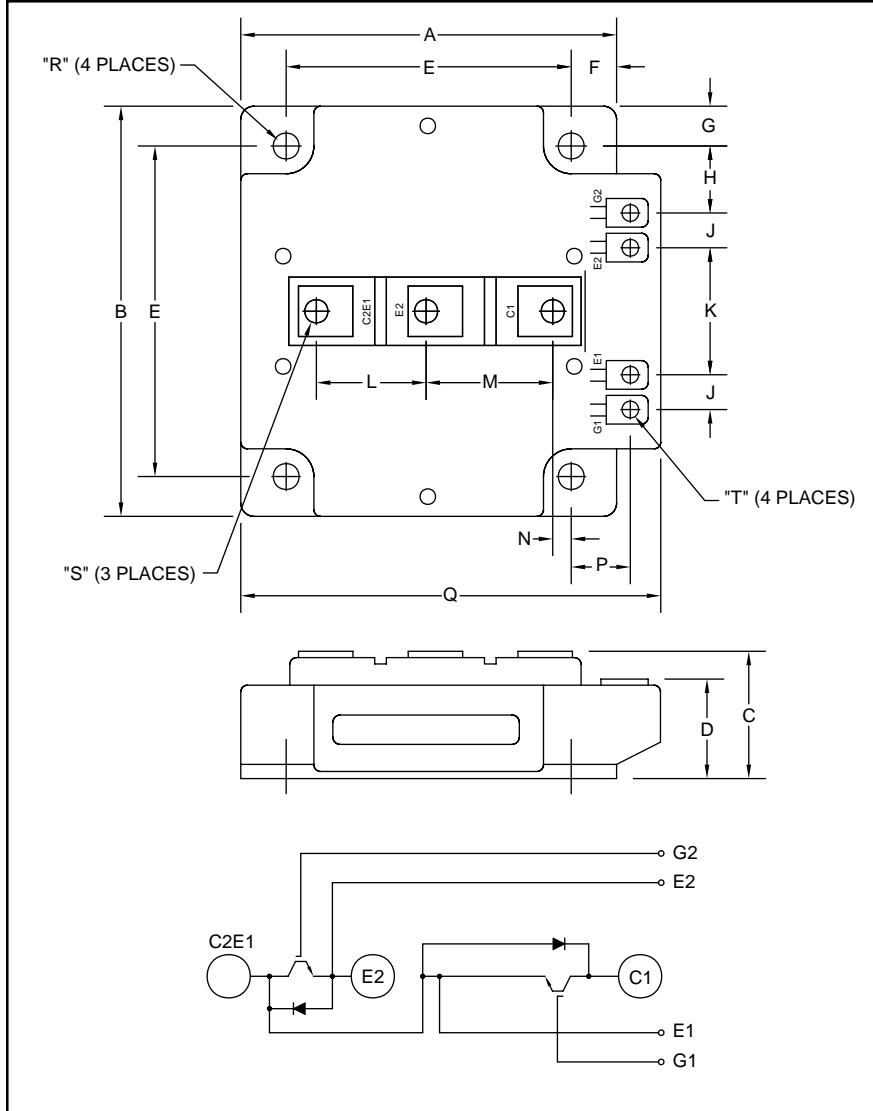

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	5.12	130.0
B	5.12	130.0
C	1.38	35.0
D	0.96	24.5
E	4.33	110.0
F	0.39	10.0
G	0.39	10.0
H	0.81	20.5
J	0.53	14.5

Dimensions	Inches	Millimeters
K	1.57	40.0
L	1.42	36.0
M	1.72	43.8
N	0.54	13.8
P	0.45	11.5
Q	5.51	140.0
R	0.26 Dia.	6.5 Dia.
S	M8	M8
T	M4	M4



Description:

Powerex IGBTMOD™ Modules are designed for use in switching applications. Each module consists of two IGBT Transistors in a half-bridge configuration with each transistor having a reverse-connected super-fast recovery free-wheel diode. All components and interconnects are isolated from the heat sinking baseplate, offering simplified system assembly and thermal management.

Features:

- Low Drive Power
- Low $V_{CE(sat)}$
- Discrete Super-Fast Recovery Free-Wheel Diode
- Isolated Baseplate for Easy Heat Sinking

Applications:

- AC Motor Control
- Motion/Servo Control
- UPS
- Welding Power Supplies
- Laser Power Supplies

Ordering Information:

Example: Select the complete module number you desire from the table - i.e. CM800DU-12H is a 600V (V_{CES}), 800 Ampere Dual IGBTMOD™ Power Module.

Type	Current Rating Amperes	V_{CES} Volts (x 50)
CM	800	12

CM800DU-12H
Dual IGBTMOD™ U-Series Module
 800 Amperes/600 Volts

Absolute Maximum Ratings, $T_j = 25\text{ }^\circ\text{C}$ unless otherwise specified

Ratings	Symbol	CM800DU-12H	Units
Junction Temperature	T_j	-40 to 150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to 125	$^\circ\text{C}$
Collector-Emitter Voltage (G-E SHORT)	V_{CES}	600	Volts
Gate-Emitter Voltage (C-E SHORT)	V_{GES}	± 20	Volts
Collector Current ($T_c = 25^\circ\text{C}$)	I_C	800	Amperes
Peak Collector Current	I_{CM}	1600*	Amperes
Emitter Current** ($T_c = 25^\circ\text{C}$)	I_E	800	Amperes
Peak Emitter Current**	I_{EM}	1600*	Amperes
Maximum Collector Dissipation ($T_c = 25^\circ\text{C}$, $T_j \leq 150^\circ\text{C}$)	P_C	1500	Watts
Mounting Torque, M8 Main Terminal	–	95	in-lb
Mounting Torque, M6 Mounting	–	40	in-lb
G(E) Terminal, M4	–	15	in-lb
Weight	–	1200	Grams
Isolation Voltage (Main Terminal to Baseplate, AC 1 min.)	V_{iso}	2500	Volts

* Pulse width and repetition rate should be such that the device junction temperature (T_j) does not exceed $T_{j(max)}$ rating.

**Represents characteristics of the anti-parallel, emitter-to-collector free-wheel diode (FWDi).

Static Electrical Characteristics, $T_j = 25\text{ }^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Collector-Cutoff Current	I_{CES}	$V_{CE} = V_{CES}$, $V_{GE} = 0V$	–	–	2	mA
Gate Leakage Voltage	I_{GES}	$V_{GE} = V_{GES}$, $V_{CE} = 0V$	–	–	0.5	μA
Gate-Emitter Threshold Voltage	$V_{GE(th)}$	$I_C = 80\text{mA}$, $V_{CE} = 10V$	4.5	6	7.5	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 800A$, $V_{GE} = 15V$, $T_j = 25^\circ\text{C}$	–	2.55	3.15	Volts
		$I_C = 800A$, $V_{GE} = 15V$, $T_j = 125^\circ\text{C}$	–	2.75	–	Volts
Total Gate Charge	Q_G	$V_{CC} = 300V$, $I_C = 800A$, $V_{GE} = 15V$	–	1600	–	nC
Emitter-Collector Voltage**	V_{EC}	$I_E = 800A$, $V_{GE} = 0V$	–	–	2.6	Volts

**Represents characteristics of the anti-parallel, emitter-to-collector free-wheel diode (FWDi).

Dynamic Electrical Characteristics, $T_j = 25\text{ }^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Input Capacitance	C_{ies}		–	–	70.4	nf
Output Capacitance	C_{oes}	$V_{CE} = 10V$, $V_{GE} = 0V$	–	–	38.4	nf
Reverse Transfer Capacitance	C_{res}		–	–	10.4	nf
Resistive	Turn-on Delay Time	$V_{CC} = 300V$, $I_C = 800A$,	–	–	400	ns
	Rise Time					
Switch	Turn-off Delay Time	$R_G = 3.1\Omega$, Resistive	–	–	500	ns
	Fall Time					
Diode Reverse Recovery Time**	t_{rr}	$I_E = 800A$, $di_E/dt = -1600A/\mu\text{s}$	–	–	160	ns
Diode Reverse Recovery Charge**	Q_{rr}	$I_E = 800A$, $di_E/dt = -1600A/\mu\text{s}$	–	1.92	–	μC

**Represents characteristics of the anti-parallel, emitter-to-collector free-wheel diode (FWDi).










Thermal and Mechanical Characteristics, $T_j = 25\text{ }^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance, Junction to Case	$R_{th(j-c)Q}$	Per IGBT 1/2 Module	–	–	0.083	$^\circ\text{C/W}$
Thermal Resistance, Junction to Case	$R_{th(j-c)R}$	Per FWDi 1/2 Module	–	–	0.13	$^\circ\text{C/W}$
Contact Thermal Resistance	$R_{th(c-f)}$	Per Module, Thermal Grease Applied	–	0.010	–	$^\circ\text{C/W}$



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272



CM800DU-12H
Dual IGBTMOD™ U-Series Module
 800 Amperes/600 Volts

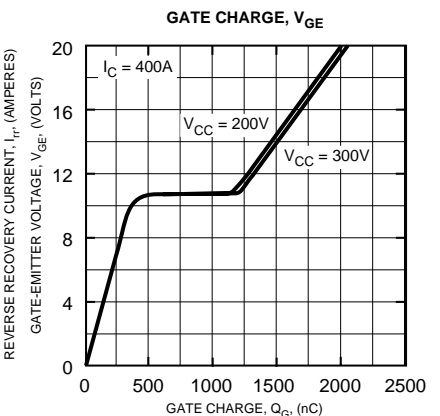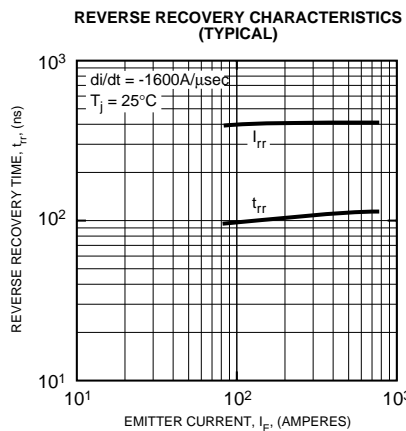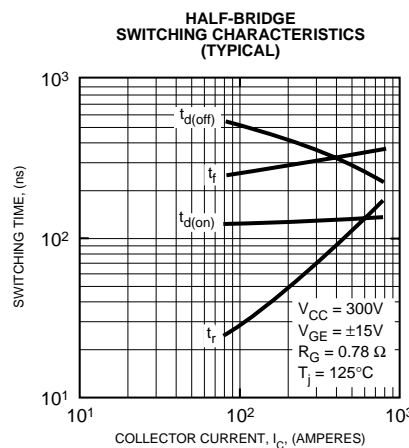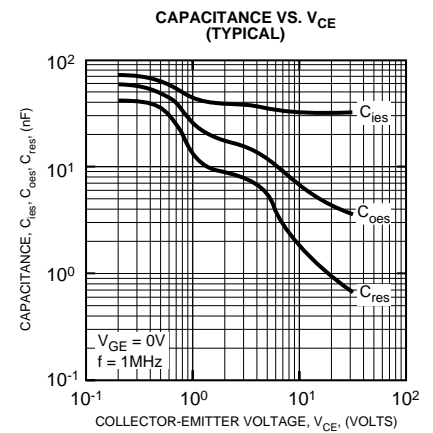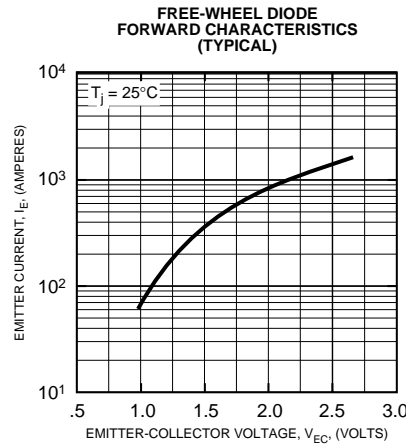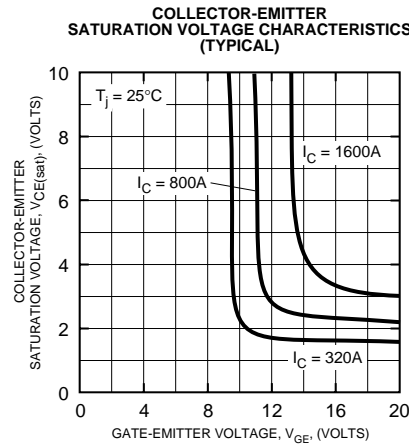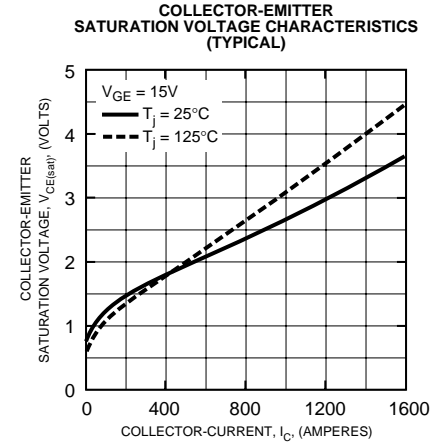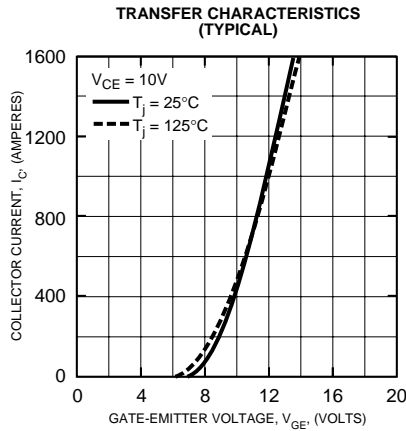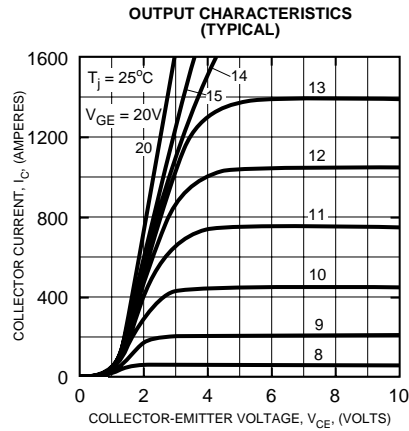



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

CM800DU-12H
Dual IGBTMOD™ U-Series Module
800 Amperes/600 Volts

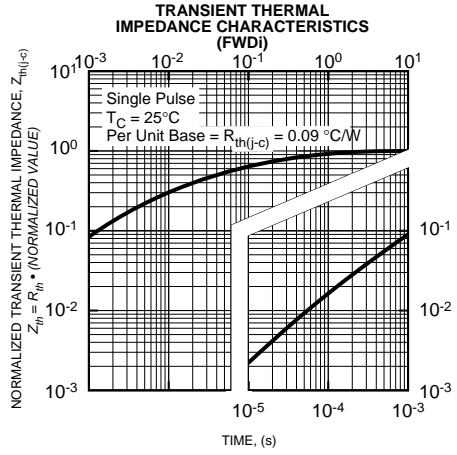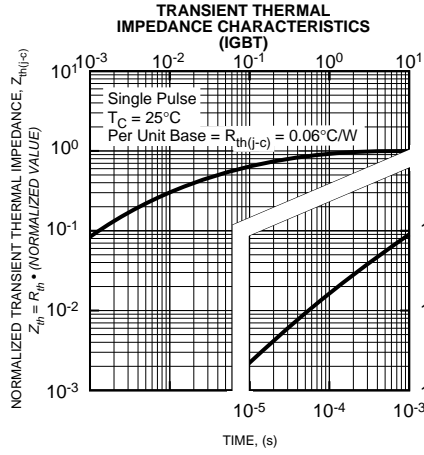



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.