


1S2638 TUNER AFC DIODE

AFC Diode

The 1S2638 is a variable Capacitor Diode intended for AFC Applications, VHF TV Applications, FM Receivers. Air Craft Communications Gear, and other receivers in the 1 MHz to 500 MHz.



Glass case JEDEC DO-35


Dimensions in mm

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

	Symbol	Value	Unit
Breakdown Voltage	BV	10	Volts
Forward Current	I_F	250	mA
Power Dissipation	P_D	350	mW
Operating Temperature	T_A	-65 to + 175	$^\circ\text{C}$
Storage Temperature	T_S	-65 to + 200	$^\circ\text{C}$

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted.)

PARAMETER	MIN.	TYP.	MX.	UNITS	TEST CONDITIONS
I_R			5	μA	$V_R = 10\text{V}$
Nominal Capacitance	5	10	20	PF	$V_R + 4.0\text{V}$, $f = 1.0\text{ MHz}$
Q	50				$V_R = 4\text{V}$, $f = 100\text{MHz}$




SEMTECH ELECTRONICS LTD.
(wholly owned subsidiary of HONEY TECHNOLOGY LTD.)




1S2638 TUNER AFC DIODE



**FIGURE OF MERIT
VERSUS FREQUENCY**

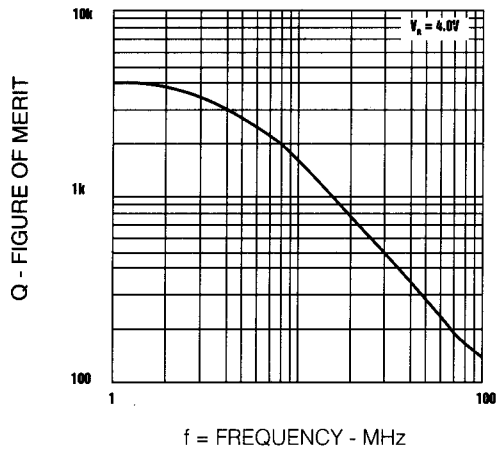

**FIGURE OF MERIT
VERSUS REVERSE VOLTAGE**

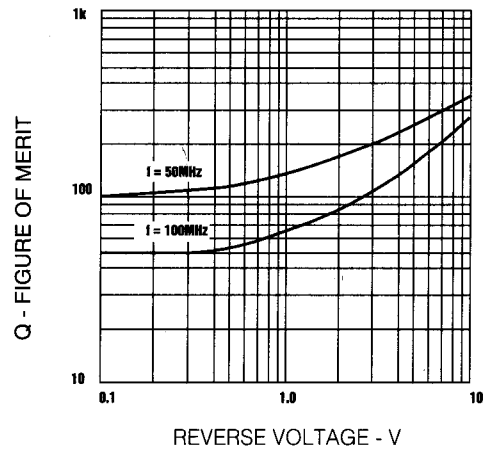

**CAPACITANCE VERSUS
REVERSE VOLTAGE**

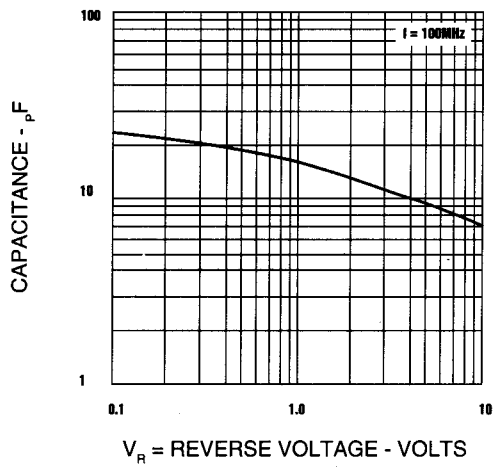

SEMTECH ELECTRONICS LTD.
(wholly owned subsidiary of HONEY TECHNOLOGY LTD.)





LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.