


CS18B
CS18D
CS18M
CS18N

SILICON CONTROLLED RECTIFIER
1.0 AMP, 200 THRU 800 VOLTS



TO-18 CASE

CentralTM
Semiconductor Corp.

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CS18B series types are hermetically sealed silicon controlled rectifiers manufactured in a TO-18 case, designed for control systems and sensing circuit applications.

MARKING CODE: FULL PART NUMBER

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

	SYMBOL	CS18B	CS18D	CS18M	CS18N	UNITS
Peak Repetitive Off-State Voltage	V_{DRM}, V_{RRM}	200	400	600	800	V
RMS On-State Current ($T_C=90^\circ\text{C}$)	$I_T(\text{RMS})$		1.0			A
Nonrept. On-State Current	I_{TSM}		10			A
Fusing Current ($t=10\text{ms}$)	I^2t		0.24			A ² s
Peak Gate Current ($t=10\mu\text{s}$)	I_{GM}		1.0			A
Peak Gate Dissipation ($t=10\mu\text{s}$)	P_{GM}		2.0			W
Gate Dissipation	$P_G (\text{AV})$		0.1			W
Storage Temperature	T_{stg}		-40 to +150			$^\circ\text{C}$
Junction Temperature	T_J		-40 to +125			$^\circ\text{C}$
Thermal Resistance	θ_{JC}		32			$^\circ\text{C/W}$
Thermal Resistance	θ_{JA}		200			$^\circ\text{C/W}$


ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_{DRM}, I_{RRM}	Rated $V_{DRM}, V_{RRM}, R_{GK}=1.0\text{K}\Omega$			1.0	μA
I_{DRM}, I_{RRM}	Rated $V_{DRM}, V_{RRM}, R_{GK}=1.0\text{K}\Omega, T_C=125^\circ\text{C}$			0.1	mA
V_{TM}	$I_T=2.0\text{A}$		1.6	2.15	V
I_{GT}	$V_D=12\text{V}, R_L=10\Omega$		20	200	μA
V_{GT}	$V_D=12\text{V}, R_L=10\Omega$		0.65	0.8	V
I_H	$R_{GK}=1.0\text{K}\Omega$		0.5	5.0	mA
dv/dt	$V_D=0.67\text{V} \times V_{DRM}, R_{GK}=1.0\text{K}\Omega, T_C=125^\circ\text{C}$	25			V/ μs

R1 (18-August 2004)

**SILICON CONTROLLED RECTIFIER
1.0 AMP, 200 THRU 800 VOLTS**

TO-18 CASE - MECHANICAL OUTLINE

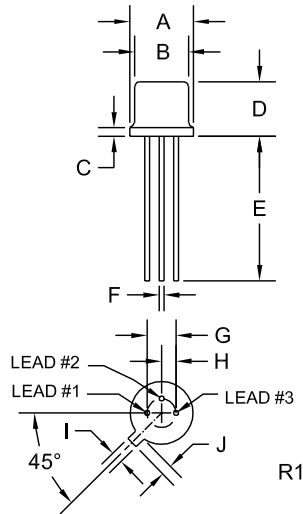

LEAD CODE:

- 1) CATHODE
- 2) GATE
- 3) ANODE

MARKING CODE:

FULL PART NUMBER

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.209	0.230	5.31	5.84
B (DIA)	0.178	0.195	4.52	4.95
C	-	0.030	-	0.76
D	0.170	0.210	4.32	5.33
E	0.500	-	12.70	-
F (DIA)	0.016	0.019	0.41	0.48
G (DIA)	0.100		2.54	
H	0.050		1.27	
I	0.036	0.046	0.91	1.17
J	0.028	0.048	0.71	1.22

TO-18 (REV: R1)



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.