

GENERAL PURPOSE APPLICATION.
HIGH VOLTAGE APPLICATION.


FEATURES

- High Collector Breakdwon Voltage
: $V_{CBO}=-160V$, $V_{CEO}=-150V$
- Low Leakage Current.
: $I_{CBO}=-50nA(Max.) @V_{CB}=-120V$
- Low Saturation Voltage
: $V_{CE(sat)}=-0.5V(Max.) @I_C=-50mA, I_B=-5mA$
- Low Noise : $NF=8dB (Max.)$


MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	-160	V
Collector-Emitter Voltage	V_{CEO}	-150	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-600	mA
Base Current	I_B	-100	mA
Collector Power Dissipation	P_C^*	350	mW
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55 ~ 150	°C

Note : * Package Mounted On 99.5% Alumina $10 \times 8 \times 0.6mm$)

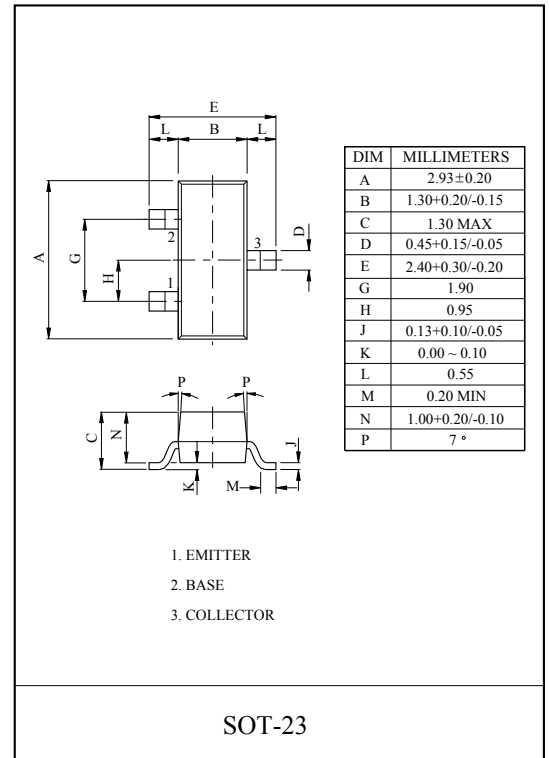

Marking

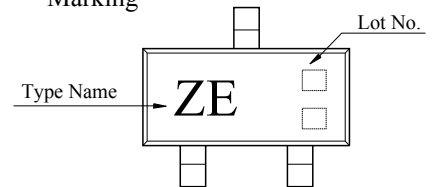

2N5401S

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I _{CBO}	V _{CB} =-120V, I _E =0	-	-	-50	nA
		V _{CB} =-120V, I _E =0, Ta=100°C	-	-	-50	μA
Emitter Cut-off Current	I _{EBO}	V _{EB} =-3V, I _C =0	-	-	-50	nA
Collector-Base Breakdown Voltage	V _{(BR)CBO}	I _C =-0.1mA, I _E =0	-160	-	-	V
Collector-Emitter Breakdown Voltage *	V _{(BR)CEO}	I _C =-1mA, I _B =0	-150	-	-	V
Emitter-Base Breakdown Voltage	V _{(BR)EBO}	I _E =-10μA, I _C =0	-5	-	-	V
DC Current Gain *	h _{FE} (1)	V _{CE} =-5V, I _C =-1mA	50	-	-	
	h _{FE} (2)	V _{CE} =-5V, I _C =-10mA	60	-	240	
	h _{FE} (3)	V _{CE} =-5V, I _C =-50mA	50	-	-	
Collector-Emitter Saturation Voltage *	V _{CE(sat)1}	I _C =-10mA, I _B =-1mA	-	-	-0.2	V
	V _{CE(sat)2}	I _C =-50mA, I _B =-5mA	-	-	-0.5	
Base-Emitter Saturation Voltage *	V _{BE(sat)1}	I _C =-10mA, I _B =-1mA	-	-	-1.0	V
	V _{BE(sat)2}	I _C =-50mA, I _B =-5mA	-	-	-1.0	
Transition Frequency	f _T	V _{CE} =-10V, I _C =-10mA, f=100MHz	100	-	300	MHz
Collector Output Capacitance	C _{ob}	V _{CB} =-10V, I _E =0, f=1MHz	-	-	6	pF
Small-Signal Current Gain	h _{fe}	V _{CE} =-10V, I _C =-1mA, f=1kHz	40	-	200	
Noise Figure	NF	V _{CE} =-5V, I _C =-250μA R _g =1kΩ, f=10Hz ~ 15.7kHz	-	-	8	dB

* Pulse Test : Pulse Width ≤ 300μs, Duty Cycle ≤ 2%.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.