


**DESCRIPTION** The AA1A4M is designed for use in medium speed switching circuit.


**FEATURE** • Bias resistors built-in type NPN transistor equivalent circuit.



$R_1 = 10\text{ k}\Omega$   
 $R_2 = 10\text{ k}\Omega$

**ABSOLUTE MAXIMUM RATINGS**










Maximum Temperatures	
Storage Temperature	-55 to +150 °C
Junction Temperature	150 °C Maximum
Maximum Power Dissipation ( $T_a = 25\text{ °C}$ )	
Total Power Dissipation	300 mW
Maximum Voltages and Currents ( $T_a = 25\text{ °C}$ )	
$V_{CBO}$ Collector to Base Voltage	60 V
$V_{CEO}$ Collector to Emitter Voltage	50 V
$V_{EBO}$ Emitter to Base Voltage	10 V
$I_{C(DC)}$ Collector Current (DC)	100 mA
$I_{C(pulse)}$ Collector Current (pulse)	200 mA

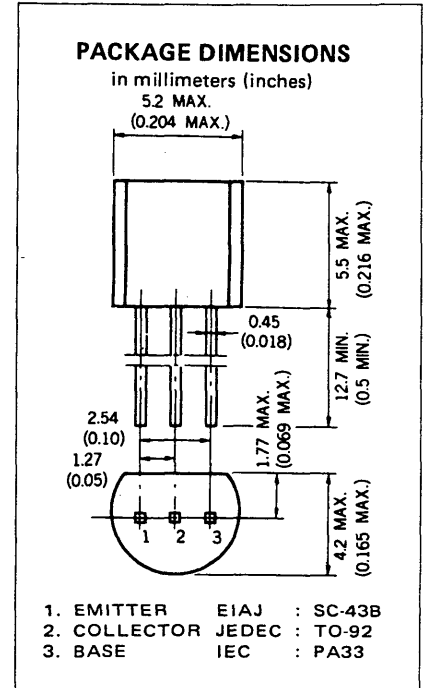

**ELECTRICAL CHARACTERISTICS ( $T_a = 25\text{ °C}$ )**

SYMBOL	CHARACTERISTIC	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
$R_1$	Input Resistance	7.0	10.0	13.0	k $\Omega$	
$R_1/R_2$	Resistors Ratio	0.9	1.0	1.1	-	
$V_{iL}$	Low Level Input Voltage		1.1	0.8	V	$V_{CE} = 5.0\text{ V}, I_C = 100\text{ }\mu\text{A}$
$V_{iH}$	Hi Level Input Voltage	3.0	1.4		V	$V_{CE} = 0.2\text{ V}, I_C = 5.0\text{ mA}$
$t_{on}$	Turn on Time		0.06	0.2	$\mu\text{s}$	$V_{CC} = 5.0\text{ V}, R_L = 1.0\text{ k}\Omega$ $V_{in} = 5.0\text{ V},$ $PW = 2\text{ }\mu\text{s}, \text{Duty Cycle} \leq 2\%$
$t_{stg}$	Storage Time		2.0	5.0	$\mu\text{s}$	
$t_{off}$	Turn off Time		2.15	6.0	$\mu\text{s}$	
$h_{FE1}$	DC Current Gain	35	62	100	-	$V_{CE} = 5.0\text{ V}, I_C = 5.0\text{ mA}$
$h_{FE2}$	DC Current Gain	80	230		-	$V_{CE} = 5.0\text{ V}, I_C = 50\text{ mA}$
$V_{CE(sat)}$	Collector Saturation Voltage		0.05	0.2	V	$I_C = 5.0\text{ mA}, I_B = 0.25\text{ mA}$
$I_{CBO}$	Collector Cutoff Current			0.1	$\mu\text{A}$	$V_{CB} = 50\text{ V}, I_E = 0$

TYPICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ )

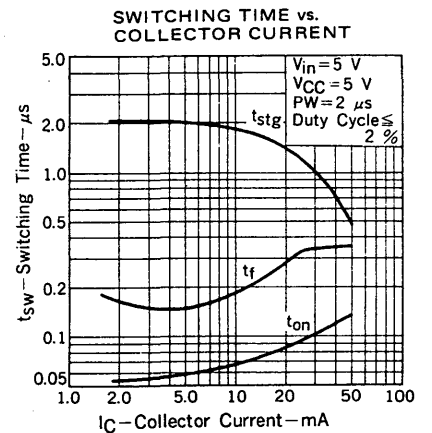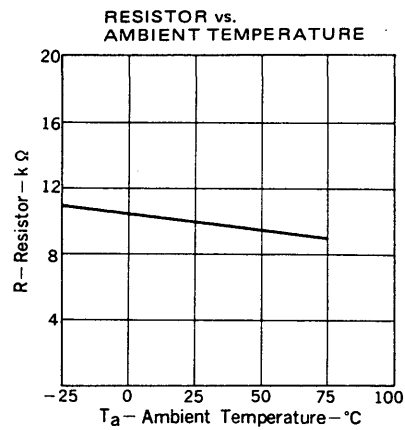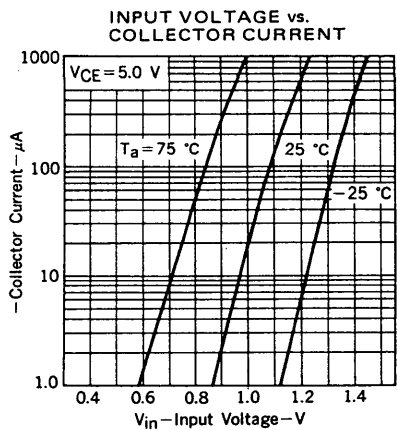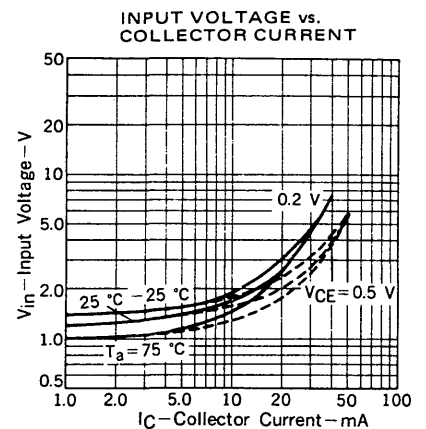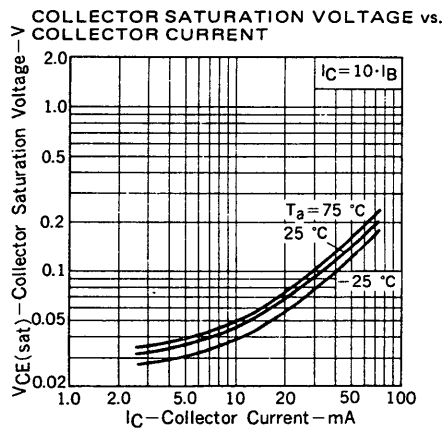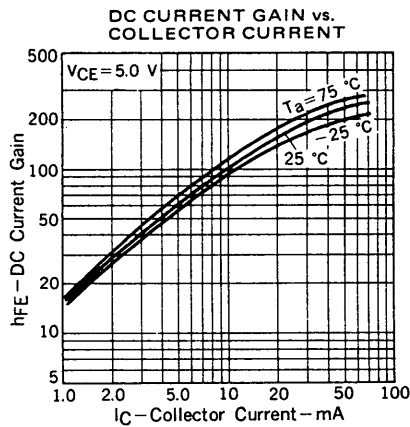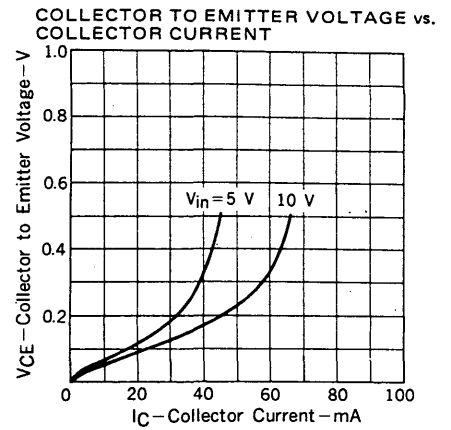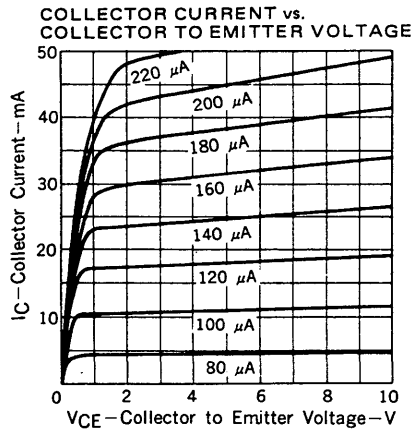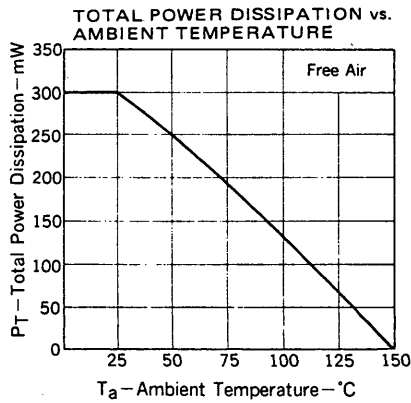

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.