


DATA SHEET

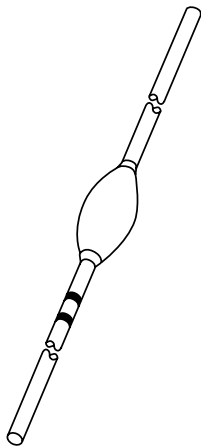

BY8400 series Fast high-voltage soft-recovery rectifiers

Product specification
Supersedes data of June 1994

1996 May 24

Fast high-voltage soft-recovery rectifiers

BY8400 series

FEATURES

- Glass passivated
- High maximum operating temperature
- Low leakage current
- Excellent stability
- Soft-recovery switching characteristics
- Compact construction.

APPLICATIONS

- For colour television and monitors up to 25 kHz
- High-voltage applications for:
 - Multipliers
 - Slot-wound diode-split-transformers.

DESCRIPTION

Rugged glass package, using a high temperature alloyed construction.

This package is hermetically sealed and fatigue free as coefficients of expansion of all used parts are matched.

The package is designed to be used in an insulating medium such as resin, oil or SF6 gas.

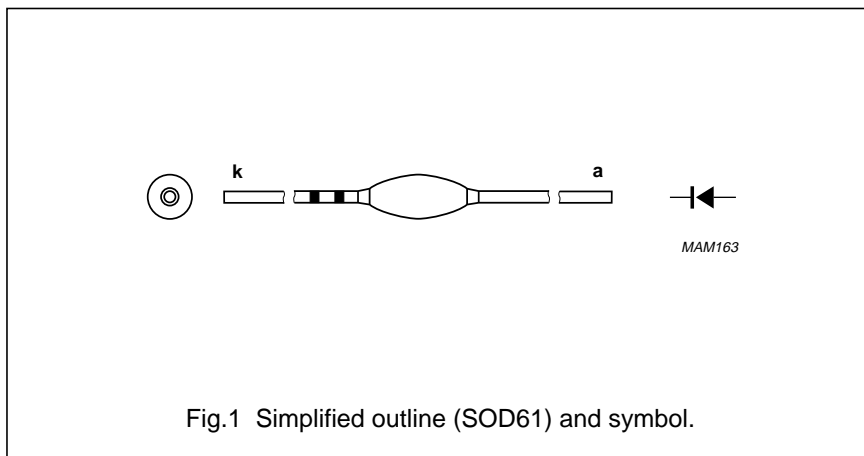


Fig.1 Simplified outline (SOD61) and symbol.

MARKING

Cathode band colour codes

| TYPE NUMBER | PACKAGE CODE | INNER BAND | OUTER BAND |
|-------------|--------------|------------|------------|
| BY8404 | SOD61AB | black | black |
| BY8406 | SOD61AC | black | green |
| BY8408 | SOD61AD | black | red |
| BY8410 | SOD61AE | black | violet |
| BY8412 | SOD61AF | black | orange |
| BY8414 | SOD61AG | black | lilac |
| BY8416 | SOD61AH | black | grey |
| BY8418 | SOD61AI | black | brown |
| BY8420 | SOD61AJ | black | dark blue |
| BY8424 | SOD61AK | black | no band |

Fast high-voltage soft-recovery rectifiers

BY8400 series

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

| SYMBOL | PARAMETER | CONDITIONS | MIN. | MAX. | UNIT |
|------------------|-------------------------------------|------------|------|------|------|
| V _{RSM} | non-repetitive peak reverse voltage | | | | |
| | BY8404 | | – | 5 | kV |
| | BY8406 | | – | 8 | kV |
| | BY8408 | | – | 10 | kV |
| | BY8410 | | – | 12 | kV |
| | BY8412 | | – | 14 | kV |
| | BY8414 | | – | 17 | kV |
| | BY8416 | | – | 19 | kV |
| | BY8418 | | – | 22 | kV |
| | BY8420 | | – | 24 | kV |
| V _{RRM} | repetitive peak reverse voltage | | | | |
| | BY8404 | | – | 5 | kV |
| | BY8406 | | – | 8 | kV |
| | BY8408 | | – | 10 | kV |
| | BY8410 | | – | 12 | kV |
| | BY8412 | | – | 14 | kV |
| | BY8414 | | – | 17 | kV |
| | BY8416 | | – | 19 | kV |
| | BY8418 | | – | 22 | kV |
| | BY8420 | | – | 24 | kV |
| V _{RW} | working reverse voltage | | | | |
| | BY8404 | | – | 4 | kV |
| | BY8406 | | – | 6 | kV |
| | BY8408 | | – | 8 | kV |
| | BY8410 | | – | 10 | kV |
| | BY8412 | | – | 12 | kV |
| | BY8414 | | – | 14 | kV |
| | BY8416 | | – | 16 | kV |
| | BY8418 | | – | 18 | kV |
| | BY8420 | | – | 20 | kV |
| BY8424 | | – | 24 | kV | |

Fast high-voltage soft-recovery rectifiers

BY8400 series

| SYMBOL | PARAMETER | CONDITIONS | MIN. | MAX. | UNIT |
|-------------|---------------------------------|---|------|------|------|
| $I_{F(AV)}$ | average forward current | averaged over any 20 ms period; see Figs 2 to 11 | – | 20 | mA |
| | BY8404 | | | | |
| | BY8406 | | | | |
| | BY8408 | | | | |
| | BY8410 | | | | |
| | BY8412 | | | | |
| | BY8414 | | | | |
| | BY8416 | | | | |
| | BY8418 | | | | |
| | BY8420 | | | | |
| BY8424 | | | | | |
| I_{FRM} | repetitive peak forward current | note 1 | – | 500 | mA |
| T_{stg} | storage temperature | | –65 | +120 | °C |
| T_j | junction temperature | | –65 | +120 | °C |

Note

1. Withstands peak currents during flash-over in a picture tube.

Fast high-voltage soft-recovery rectifiers

BY8400 series





ELECTRICAL CHARACTERISTICS $T_j = 25\text{ }^\circ\text{C}$; unless otherwise specified.

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|----------|-----------------------|---|------|------|------|---------------|
| V_F | forward voltage | $I_F = 100\text{ mA}$; $T_j = T_{j\text{ max}}$; see Figs 12 to 21 | - | - | 20 | V |
| | BY8404 | | | | | |
| | BY8406 | | | | | |
| | BY8408 | | | | | |
| | BY8410 | | | | | |
| | BY8412 | | | | | |
| | BY8414 | | | | | |
| | BY8416 | | | | | |
| | BY8418 | | | | | |
| | BY8420 | | | | | |
| BY8424 | | | | | | |
| I_R | reverse current | $V_R = V_{RW\text{ max}}$; $T_j = 120\text{ }^\circ\text{C}$ | - | - | 3 | μA |
| Q_r | recovery charge | when switched from $I_F = 100\text{ mA}$ to $V_R \geq 100\text{ V}$ and $dI_F/dt = -200\text{ mA}/\mu\text{s}$; see Fig.22 | - | - | 1 | nC |
| t_f | fall time | when switched from $I_F = 100\text{ mA}$ to $V_R \geq 100\text{ V}$ and $dI_F/dt = -200\text{ mA}/\mu\text{s}$; see Fig.22 | 100 | - | - | ns |
| t_{rr} | reverse recovery time | when switched from $I_F = 2\text{ mA}$ to $I_R = 4\text{ mA}$; measured at $I_R = 1\text{ mA}$; see Fig.23 | - | - | 100 | ns |
| C_d | diode capacitance | $V_R = 0\text{ V}$; $f = 1\text{ MHz}$ | - | 1.20 | - | pF |
| | BY8404 | | | | | |
| | BY8406 | | | | | |
| | BY8408 | | | | | |
| | BY8410 | | | | | |
| | BY8412 | | | | | |
| | BY8414 | | | | | |
| | BY8416 | | | | | |
| | BY8418 | | | | | |
| | BY8420 | | | | | |
| BY8424 | | | | | | |

Fast high-voltage soft-recovery rectifiers





BY8400 series

GRAPHICAL DATA

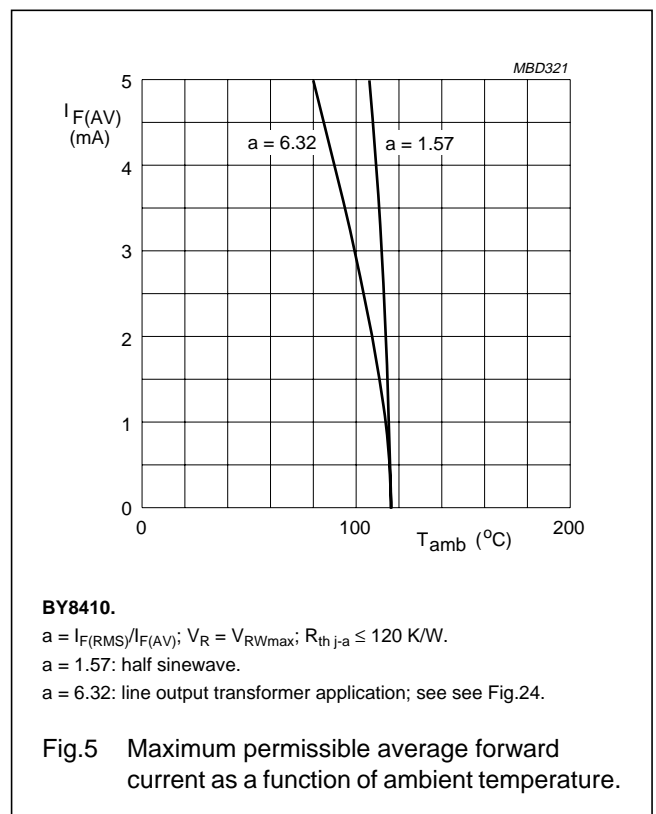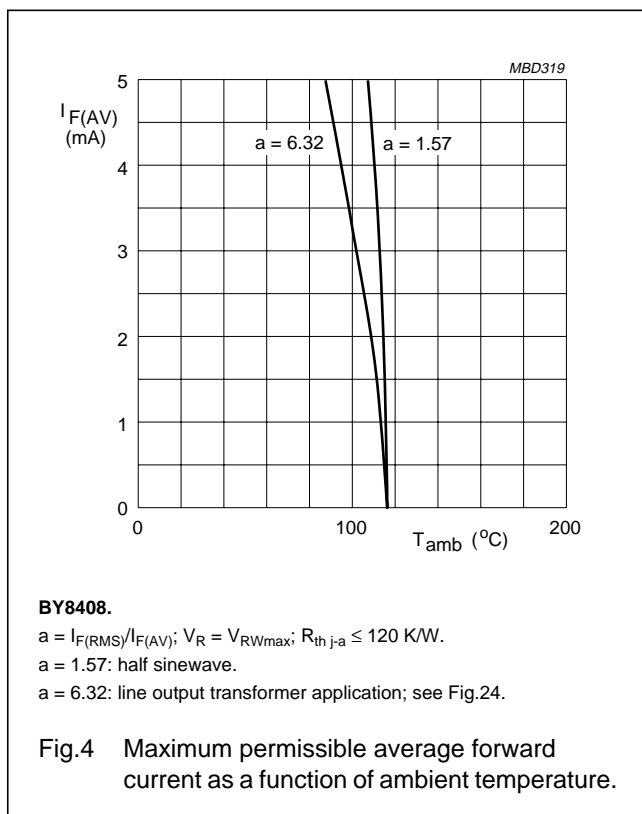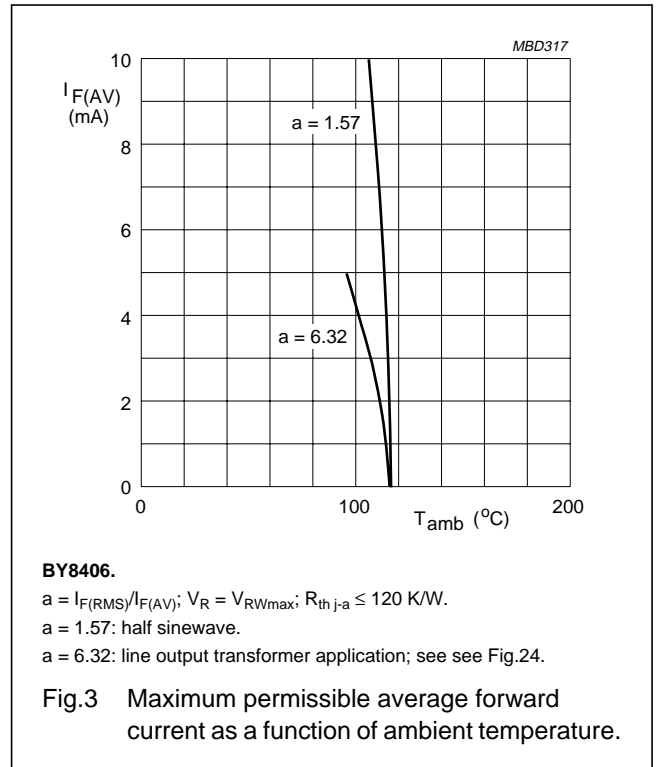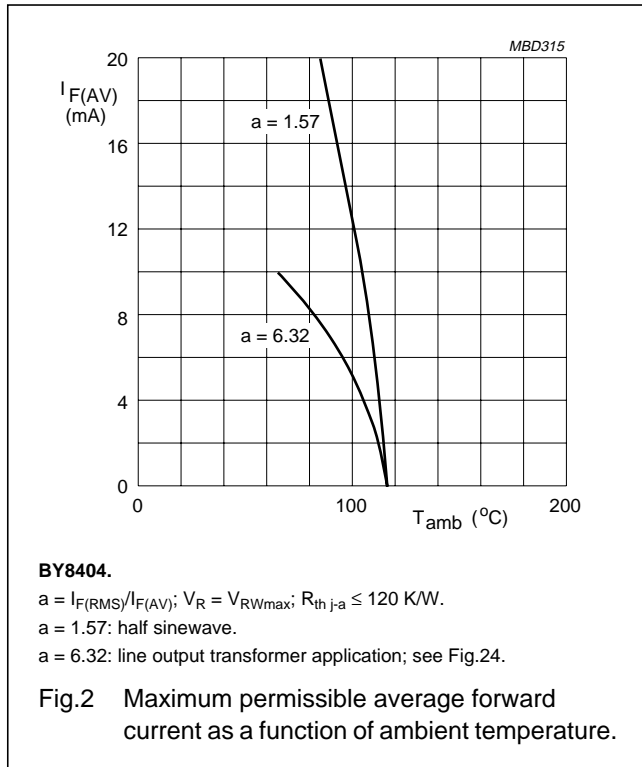





Fast high-voltage soft-recovery rectifiers

BY8400 series

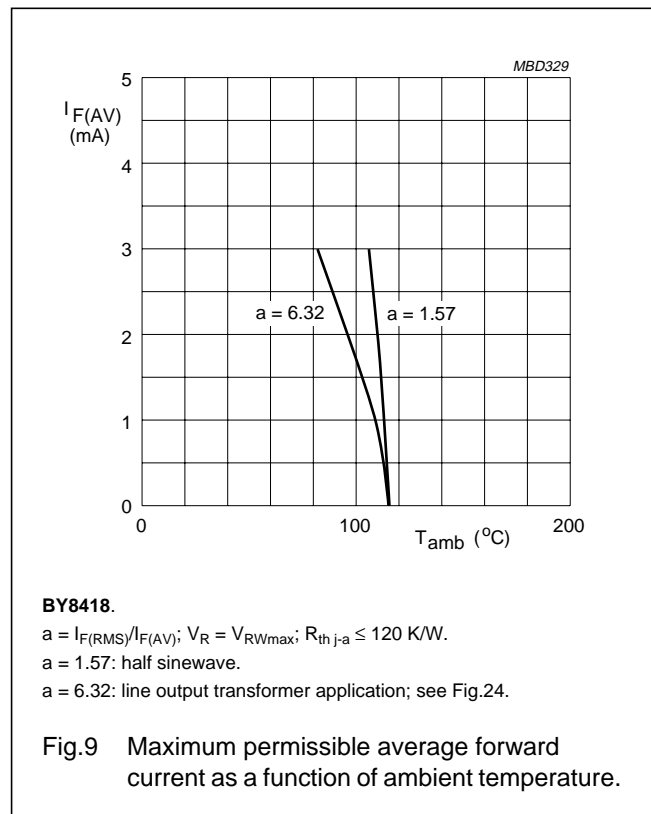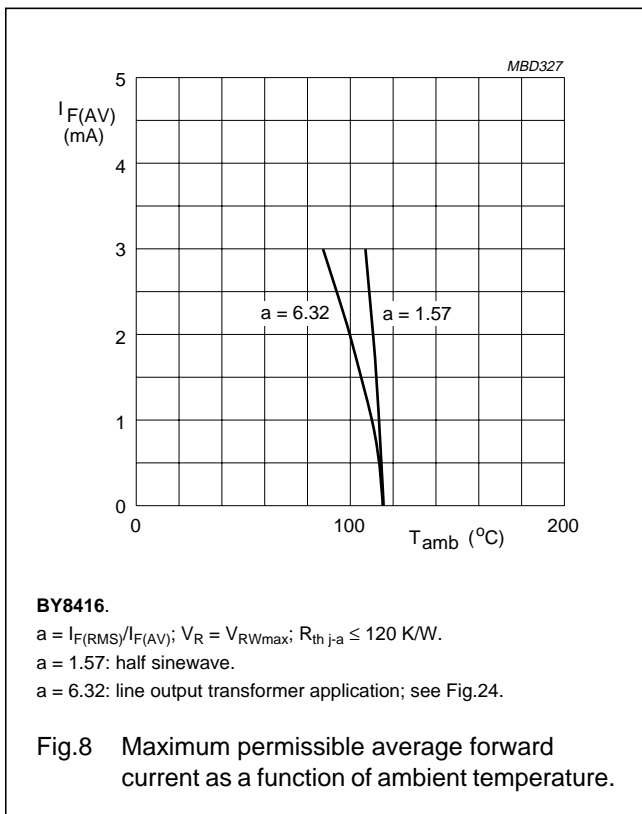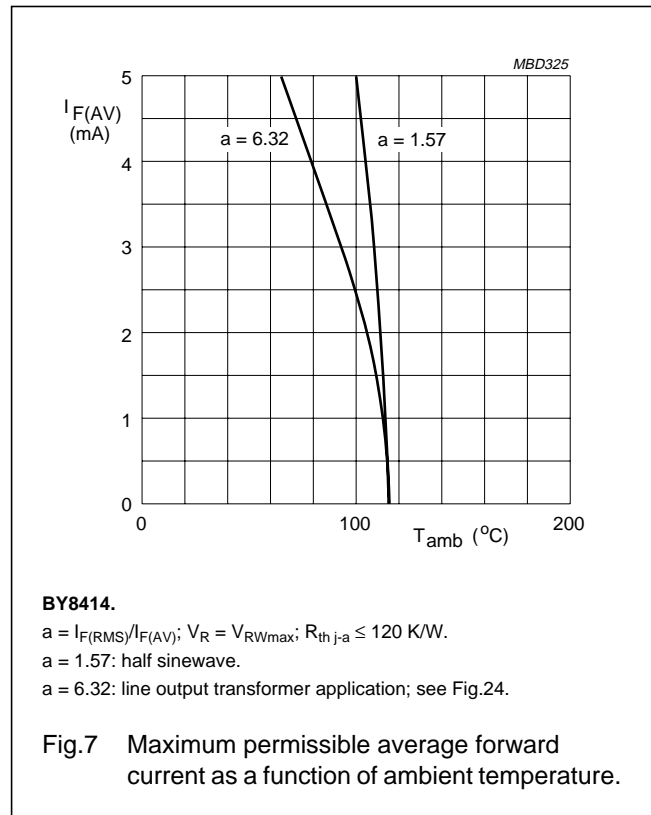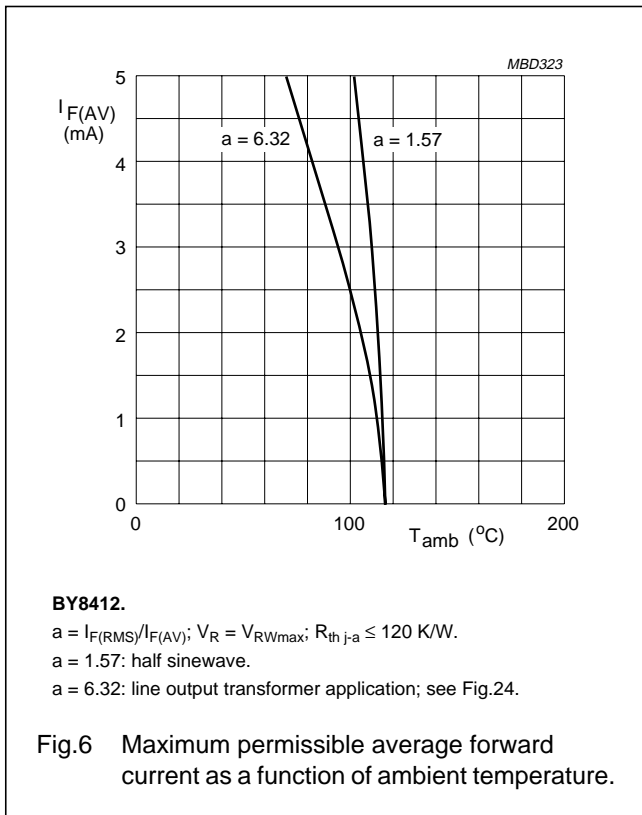





Fast high-voltage soft-recovery rectifiers

BY8400 series

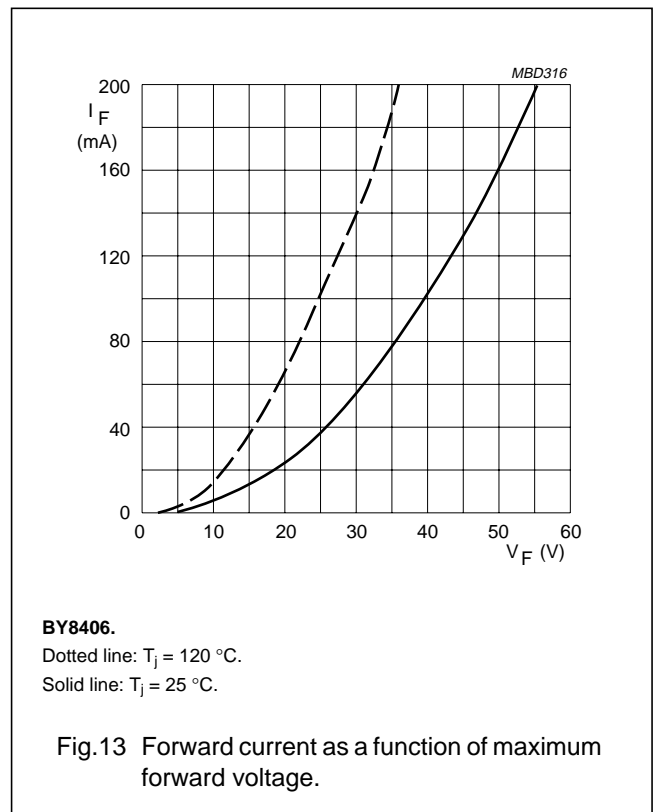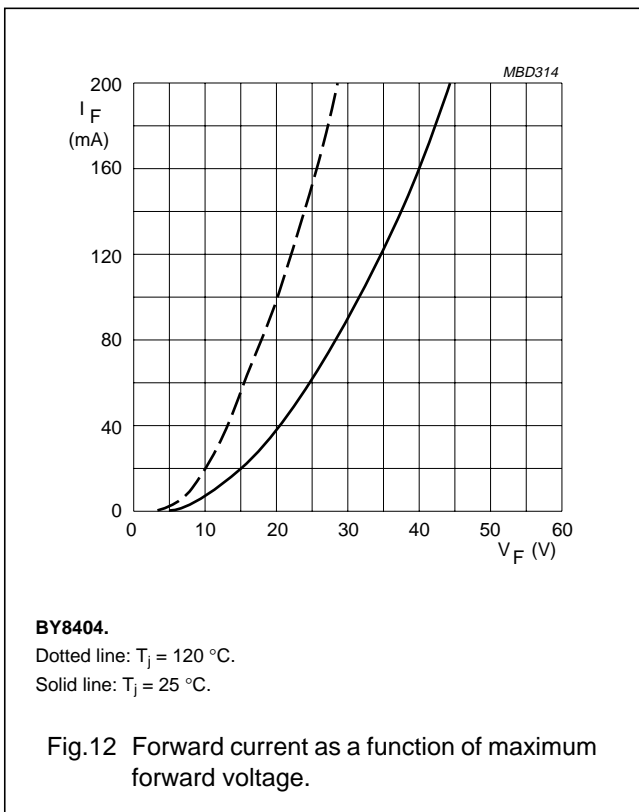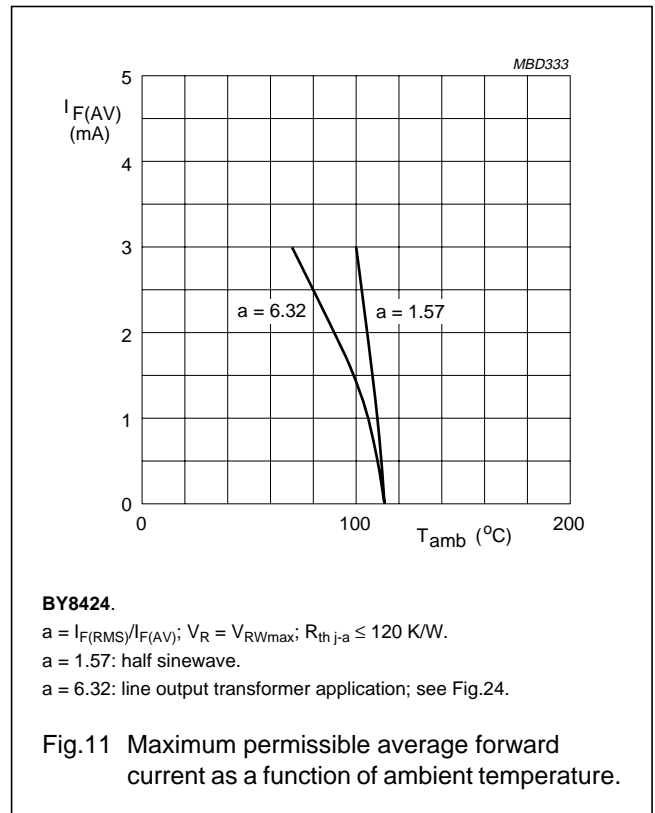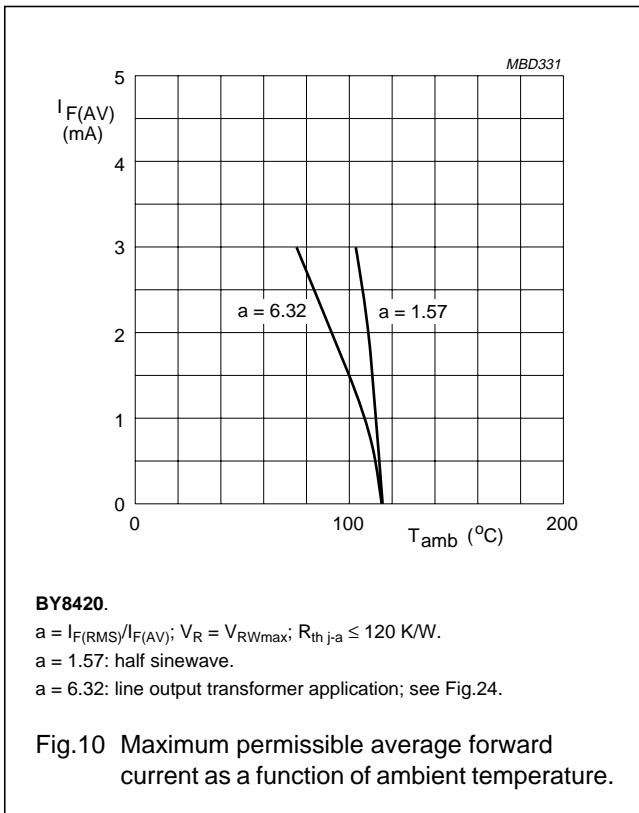





Fast high-voltage soft-recovery rectifiers

BY8400 series

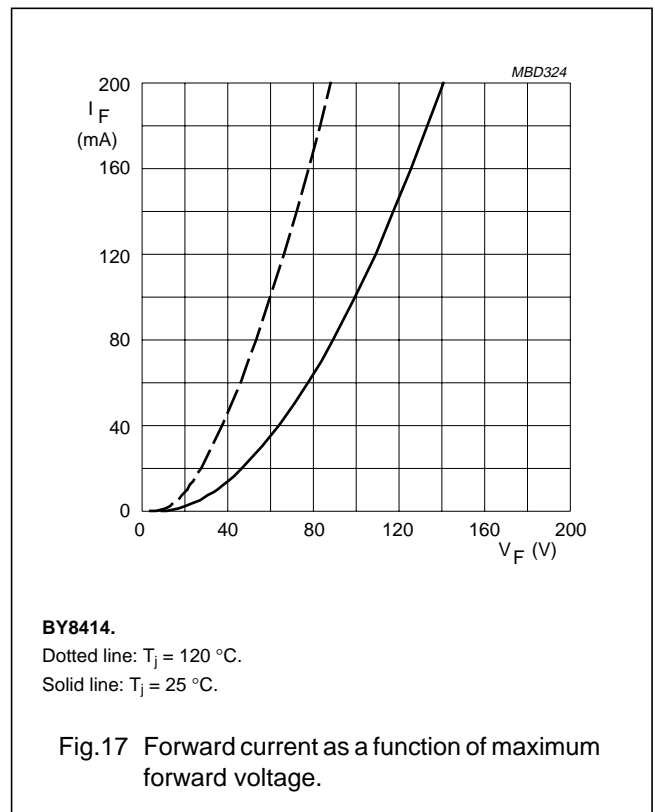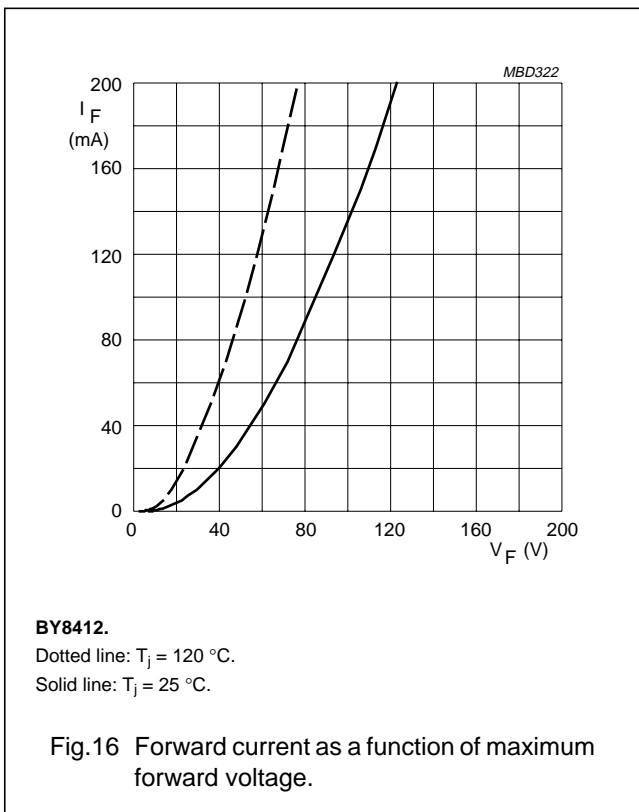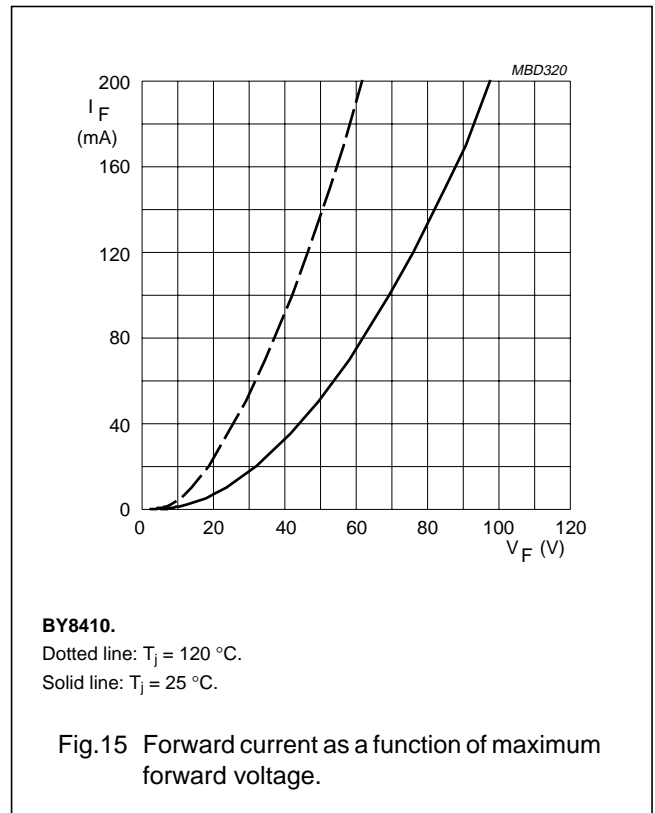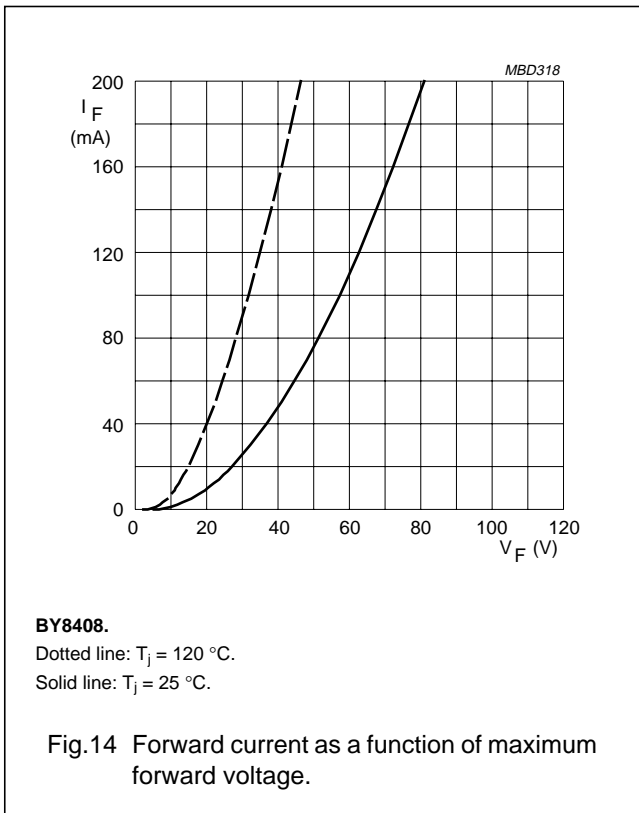

Fast high-voltage soft-recovery rectifiers

BY8400 series

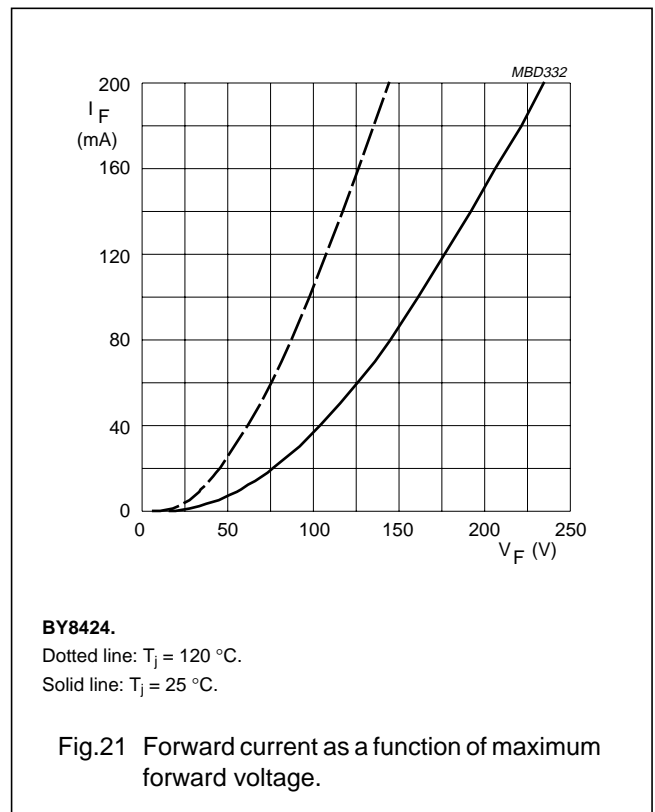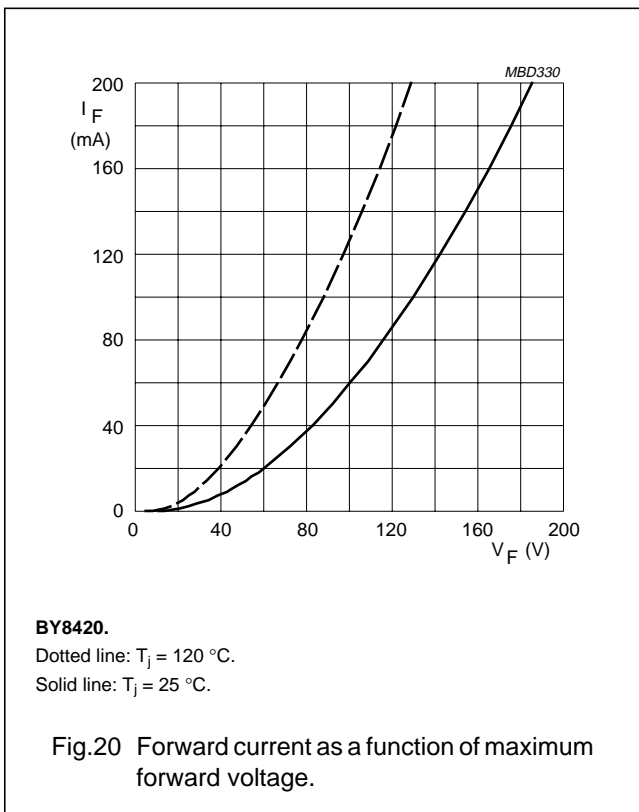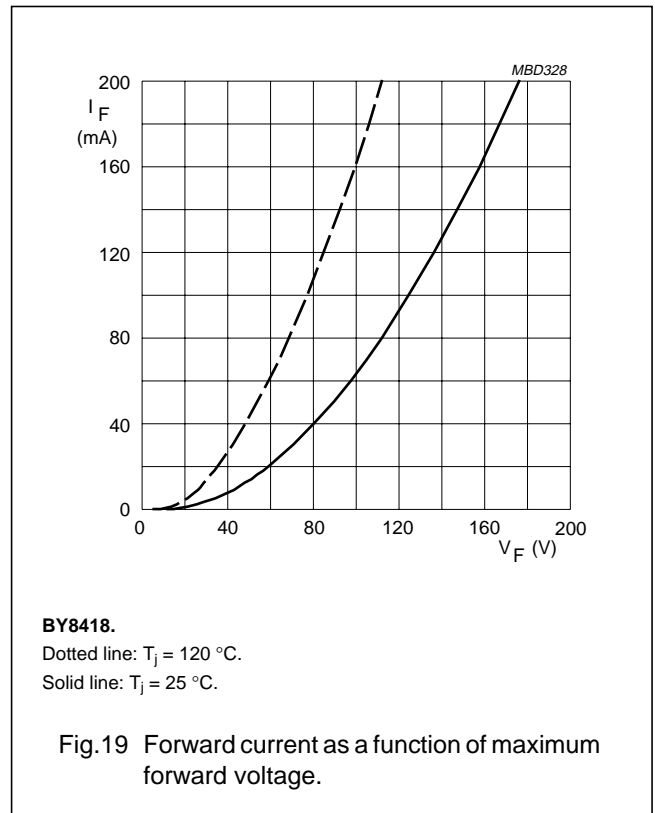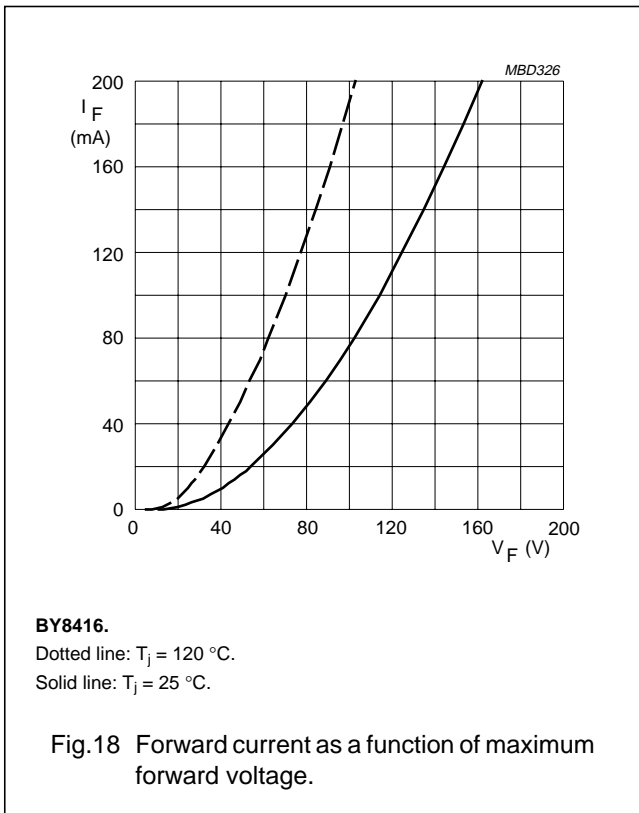

Fast high-voltage soft-recovery rectifiers

BY8400 series


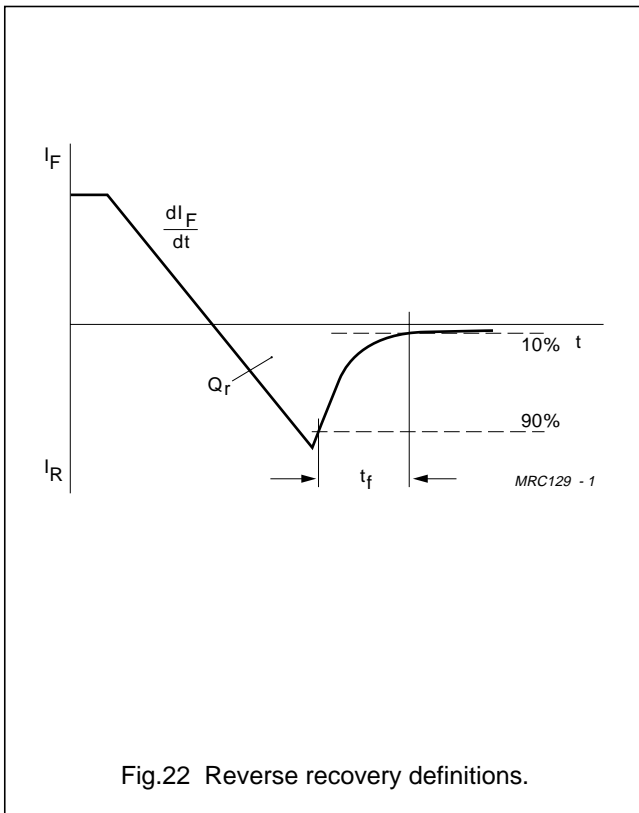


Fig.22 Reverse recovery definitions.

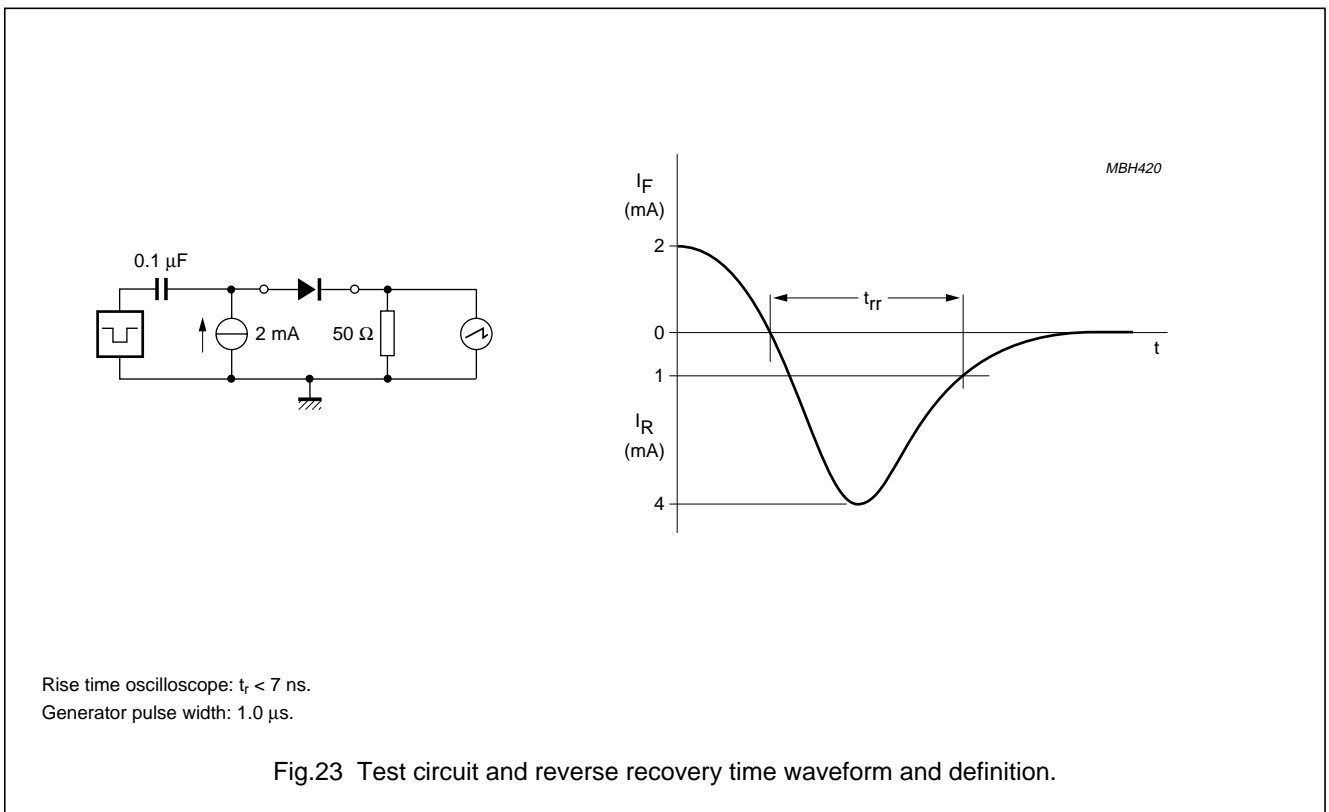

Rise time oscilloscope: $t_r < 7 \text{ ns}$.
 Generator pulse width: $1.0 \mu\text{s}$.

Fig.23 Test circuit and reverse recovery time waveform and definition.

Fast high-voltage soft-recovery rectifiers

BY8400 series

APPLICATION INFORMATION


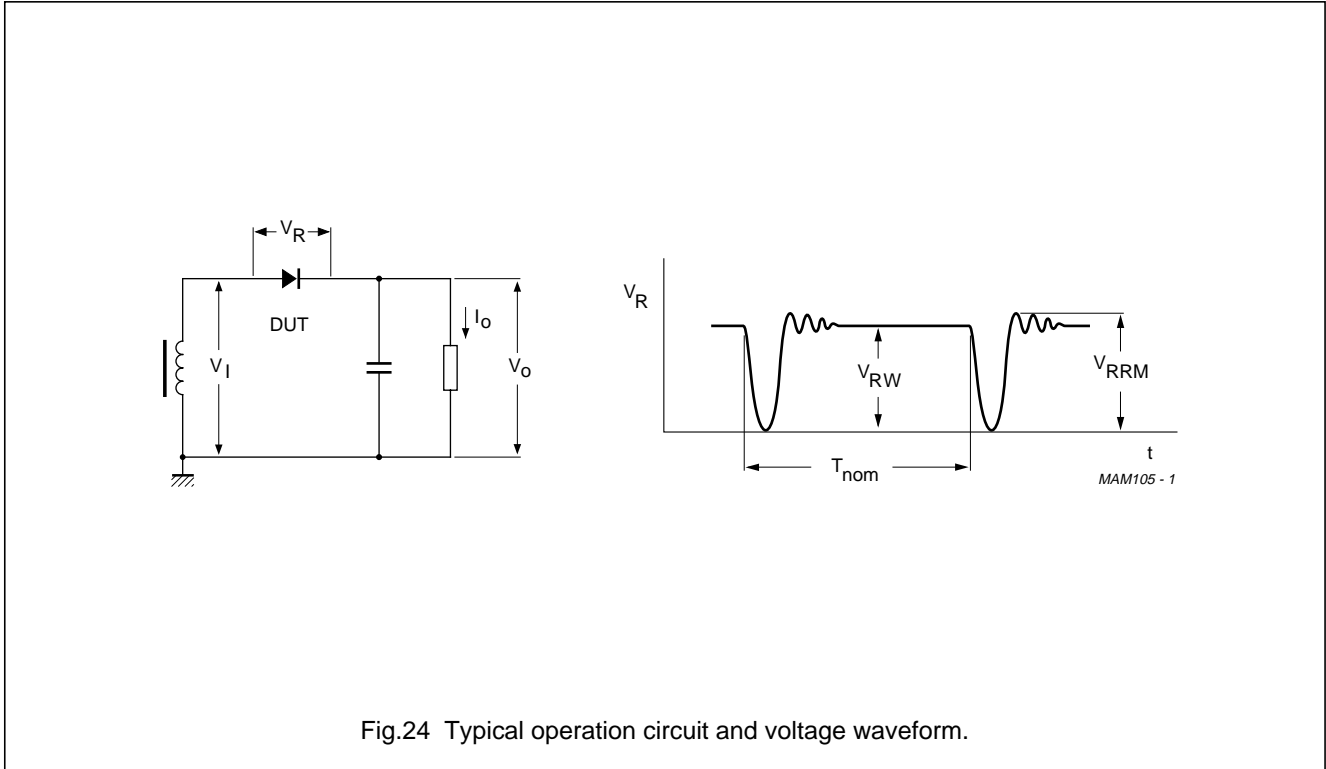


Fig.24 Typical operation circuit and voltage waveform.

Fast high-voltage soft-recovery rectifiers

BY8400 series

PACKAGE OUTLINE

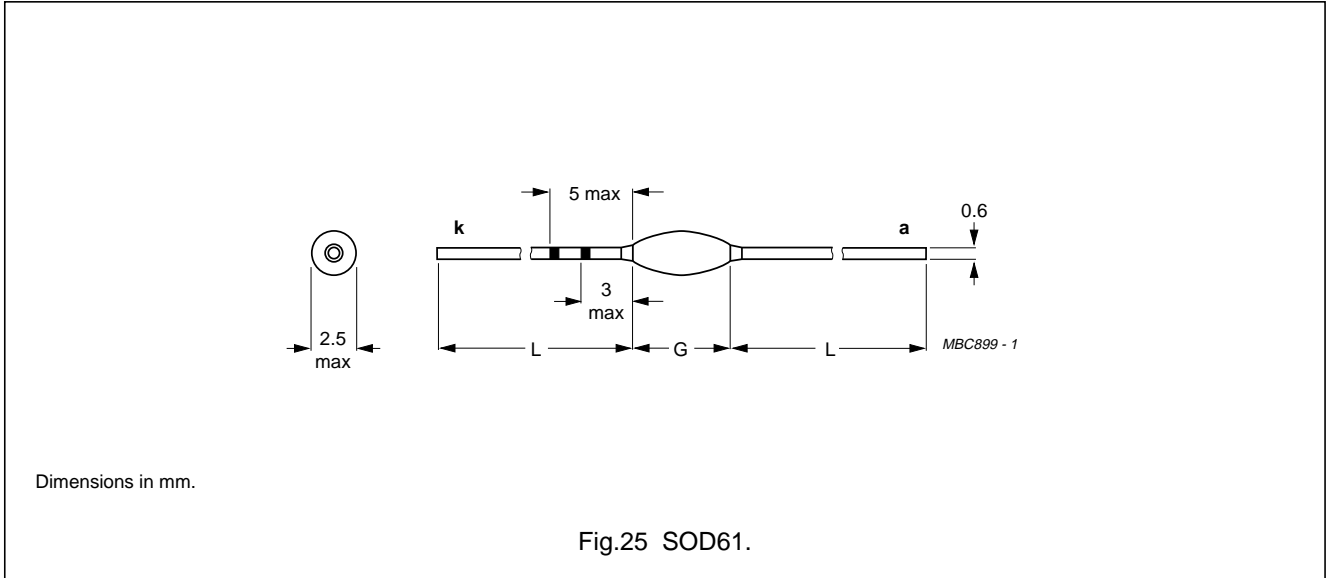

SOD61 package specification

| TYPE NUMBER | PACKAGE CODE | L _{min} (mm) | G _{max} (mm) |
|-------------|--------------|-----------------------|-----------------------|
| BY8404 | SOD61AB | 31.8 | 5.5 |
| BY8406 | SOD61AC | 30.4 | 8.3 |
| BY8408 | SOD61AD | 30.2 | 8.7 |
| BY8410 | SOD61AE | 30.0 | 9.1 |
| BY8412 | SOD61AF | 29.8 | 9.5 |
| BY8414 | SOD61AG | 29.6 | 9.9 |
| BY8416 | SOD61AH | 29.3 | 10.5 |
| BY8418 | SOD61AI | 28.8 | 11.5 |
| BY8420 | SOD61AJ | 28.3 | 12.5 |
| BY8424 | SOD61AK | 27.8 | 13.5 |

Fast high-voltage soft-recovery rectifiers

BY8400 series

DEFINITIONS

| | |
|---|---|
| Data Sheet Status | |
| Objective specification | This data sheet contains target or goal specifications for product development. |
| Preliminary specification | This data sheet contains preliminary data; supplementary data may be published later. |
| Product specification | This data sheet contains final product specifications. |
| Limiting values | |
| Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability. | |
| Application information | |
| Where application information is given, it is advisory and does not form part of the specification. | |

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.