

# General purpose transistors (dual transistors)

## EMX18 / UMX18N

### ●Features


- 1) Two 2SC5585 chips in a EMT or UMT package.
- 2) Mounting possible with EMT3 or UMT3 automatic mounting machines.
- 3) Transistor elements are independent, eliminating interference.
- 4) Mounting cost and area can be cut in half.

### ●Structure


Epitaxial planar type  
NPN silicon transistor

The following characteristics apply to both Tr<sub>1</sub> and Tr<sub>2</sub>.

### ●Equivalent circuit



### ●External dimensions (Units : mm)

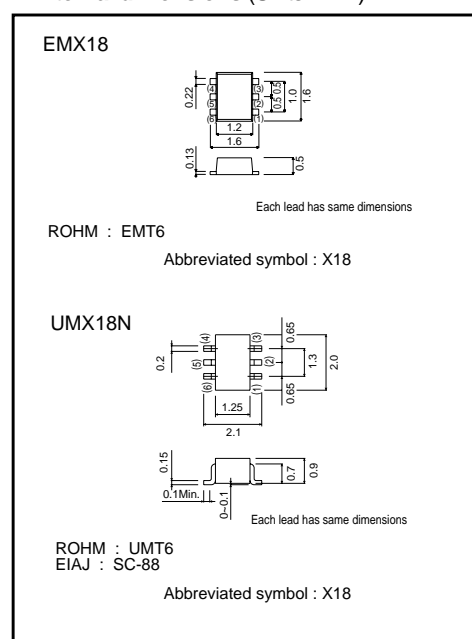

### ●Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Collector-base voltage	V <sub>CBO</sub>	15	V
Collector-emitter voltage	V <sub>CEO</sub>	12	V
Emitter-base voltage	V <sub>EBO</sub>	6	V
Collector current	I <sub>c</sub>	500	mA
Power dissipation	P <sub>d</sub>	150 (TOTAL)	mW *1
Junction temperature	T <sub>j</sub>	150	°C
Storage temperature	T <sub>stg</sub>	-55~+150	°C

\*1 120mW per element must not be exceeded.

Transistors

●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage	BV <sub>CB0</sub>	15	–	–	V	I <sub>C</sub> =10μA
Collector-emitter breakdown voltage	BV <sub>CEO</sub>	12	–	–	V	I <sub>C</sub> =1mA
Emitter-base breakdown voltage	BV <sub>EBO</sub>	6	–	–	V	I <sub>E</sub> =10μA
Collector cutoff current	I <sub>CBO</sub>	–	–	0.1	μA	V <sub>CB</sub> =15V
Emitter cutoff current	I <sub>EBO</sub>	–	–	0.1	μA	V <sub>EB</sub> =6V
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	–	90	250	mV	I <sub>C</sub> /I <sub>B</sub> =200mA/10mA
DC current transfer ratio	h <sub>FE</sub>	270	–	680	–	V <sub>CE</sub> =2V, I <sub>C</sub> =10mA
Transition frequency	f <sub>T</sub>	–	320	–	MHz	V <sub>CE</sub> =2V, I <sub>E</sub> =–10mA, f=100MHz
Output capacitance	C <sub>ob</sub>	–	7.5	–	PF	V <sub>CB</sub> =10V, I <sub>E</sub> =0A, f=1MHz

●Packaging specifications

Type	Package	Taping	
	Code	T2R	TN
	Basic ordering unit (pieces)	8000	3000
EMX18	○	—	—
UMX18N	—	—	○

●Electrical characteristic curves

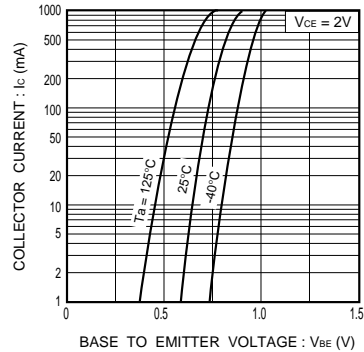


Fig.1 Grounded emitter propagation characteristics

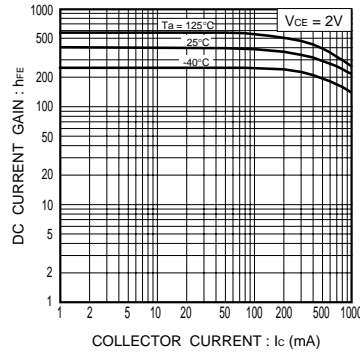


Fig.2 DC current gain vs. collector current

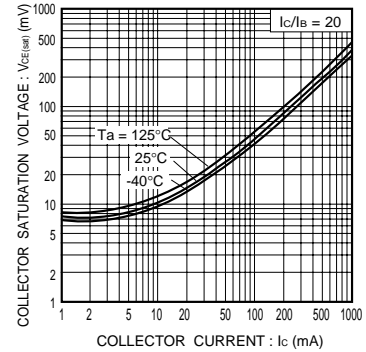


Fig.3 Collector-emitter saturation voltage vs. collector current (I)

Transistors

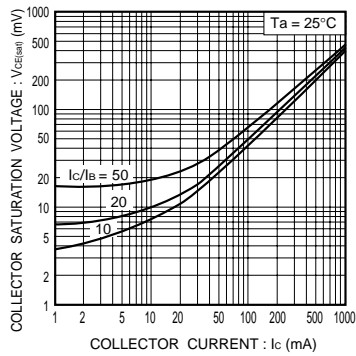


Fig.4 Collector-emitter saturation voltage vs. collector current ( II )

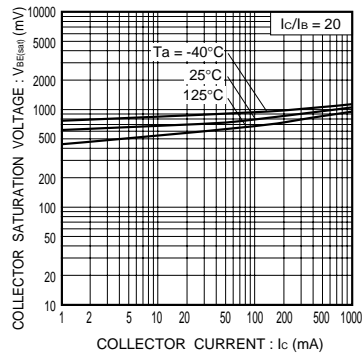


Fig.5 Base-emitter saturation voltage vs. collector current

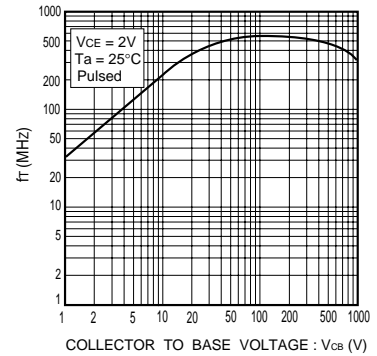


Fig.6 Collector output capacitance  
Emitter input capacitance  
vs. base voltage

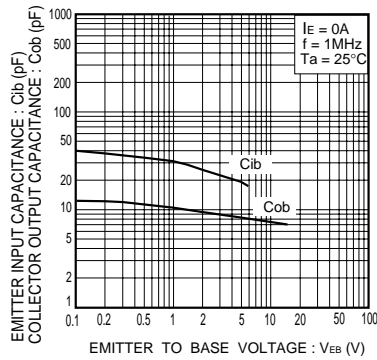


Fig.7 Collector output capacitance  
vs collector-base voltage  
Emitter input capacitance  
vs emitter-base voltage



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.