



Silicon PIN Diode


- High voltage current controlled RF resistor for RF attenuator and switches
- Frequency range above 1 MHz up to 6 GHz
- Very low capacitance at zero volt reverse bias at frequencies above 1 GHz (typ. 0.17 pF)
- Low forward resistance (typ. 2.1 Ω @ 10 mA)
- Very low signal distortion

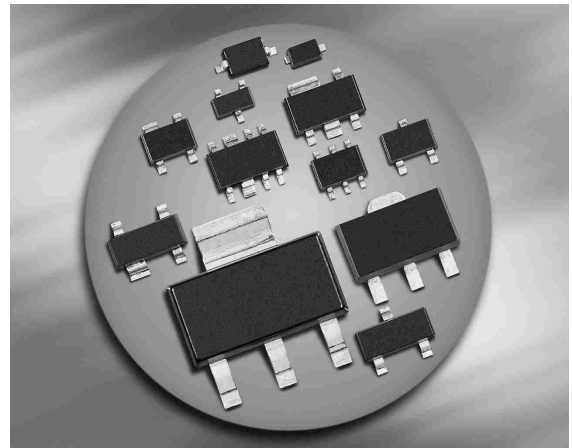


BAR64-02L
BAR64-02V
BAR64-03W




BAR64-04
BAR64-04T
BAR64-04W




BAR64-05
BAR64-05W



BAR64-06
BAR64-06W



BAR64-07



Type	Package	Configuration	L_S (nH)	Marking
BAR64-02L *	TSLP-2-1	single, leadless	0.4	MM
BAR64-02V	SC79	single	0.6	O
BAR64-03W	SOD323	single	1.8	2 blue
BAR64-04	SOT23	series	1.8	PPs
BAR64-04T	SC75	series	1.2	PPs
BAR64-04W	SOT323	series	1.4	PPs
BAR64-05	SOT23	common cathode	1.8	PRs
BAR64-05W	SOT323	common cathode	1.4	PRs
BAR64-06	SOT23	common anode	1.8	PSs
BAR64-06W	SOD323	common anode	1.4	PSs
BAR64-07	SOT143	parallel pair	2	PTs

* Preliminary Data

Maximum Ratings at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Value	Unit
Diode reverse voltage	V_R	150	V
Forward current	I_F	100	mA
Total power dissipation BAR64-02L, $T_S \leq 135^\circ\text{C}$ BAR64-02V, $T_S \leq 125^\circ\text{C}$ BAR64-03W, BAR64-07, $T_S \leq 25^\circ\text{C}$ BAR64-04, -05, -06, $T_S \leq 65^\circ\text{C}$ BAR64-04T, $T_S \leq 109^\circ\text{C}$ BAR64-04W, -05W, -06W, $T_S \leq 115^\circ\text{C}$	P_{tot}	250 250 250 250 250 250	mW
Junction temperature	T_j	150	°C
Operating temperature range	T_{op}	-55 ... 125	
Storage temperature	T_{stg}	-55 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ¹⁾ BAR64-02L BAR64-02V, -04W, -05W, -06W BAR64-03W BAR64-04, -05, -06 BAR64-04T BAR64-07	R_{thJS}	≤ 60 ≤ 140 ≤ 370 ≤ 340 ≤ 165 ≤ 290	

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Breakdown voltage $I_{(\text{BR})} = 5 \mu\text{A}$	$V_{(\text{BR})}$	150	-	-	V
Forward voltage $I_F = 50 \text{ mA}$	V_F	-	-	1.1	

¹For calculation of R_{thJA} please refer to Application Note Thermal Resistance


Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics					
Diode capacitance $V_R = 20\text{ V}, f = 1\text{ MHz}$ $V_R = 0\text{ V}, f = 100\text{ MHz}$ $V_R = 0\text{ V}, f = 1\dots 1.8\text{ GHz}, \text{BAR64-02L}$ $V_R = 0\text{ V}, f = 1\dots 1.8\text{ GHz}, \text{all other}$	C_T	- - - -	0.23 0.3 0.13 0.17	0.35 - - -	pF
Reverse parallel resistance $V_R = 0\text{ V}, f = 100\text{ MHz}$ $V_R = 0\text{ V}, f = 1\text{ GHz}$ $V_R = 0\text{ V}, f = 1.8\text{ GHz}$	R_P	- - -	10 4 3	- - -	k Ω
Forward resistance $I_F = 1\text{ mA}, f = 100\text{ MHz}$ $I_F = 10\text{ mA}, f = 100\text{ MHz}$ $I_F = 100\text{ mA}, f = 100\text{ MHz}$	r_f	- - -	12.5 2.1 0.85	20 2.8 1.35	Ω
Charge carrier life time $I_F = 10\text{ mA}, I_R = 6\text{ mA}, \text{measured at } I_R = 3\text{ mA}, R_L = 100\ \Omega$	τ_{rr}	-	1550	-	ns
I-region width	W_I	-	50	-	μm
Insertion loss ¹⁾ $I_F = 3\text{ mA}, f = 1.8\text{ GHz}$ $I_F = 5\text{ mA}, f = 1.8\text{ GHz}$ $I_F = 10\text{ mA}, f = 1.8\text{ GHz}$	$ S_{21} ^2$	- - -	-0.32 -0.23 -0.16	- - -	dB
Isolation ¹⁾ $V_R = 0\text{ V}, f = 0.9\text{ GHz}$ $V_R = 0\text{ V}, f = 1.8\text{ GHz}$ $V_R = 0\text{ V}, f = 2.45\text{ GHz}$ $V_R = 0\text{ V}, f = 5.6\text{ GHz}$	$ S_{21} ^2$	- - - -	-22 -17 -14.5 -8.5	- - - -	

¹BAR64-02L in series configuration, $Z = 50\ \Omega$


Diode capacitance $C_T = f(V_R)$

$f = \text{Parameter}$

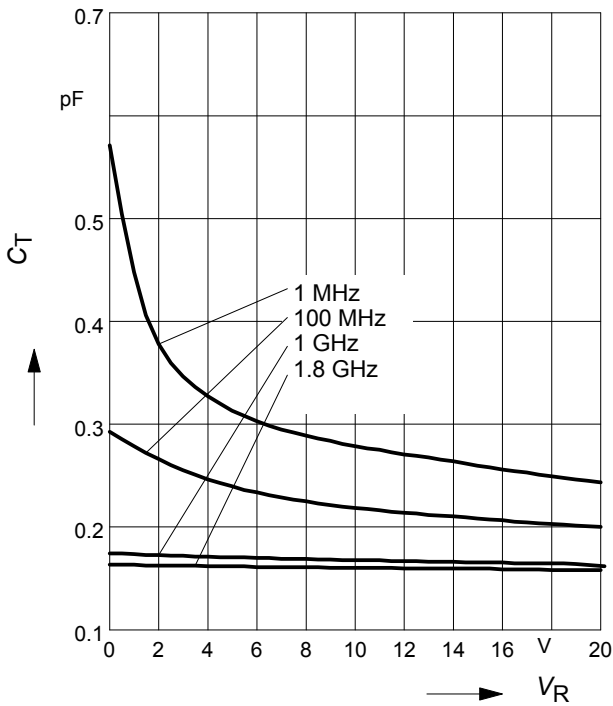


Reverse parallel resistance $R_p = f(V_R)$

$f = \text{Parameter}$

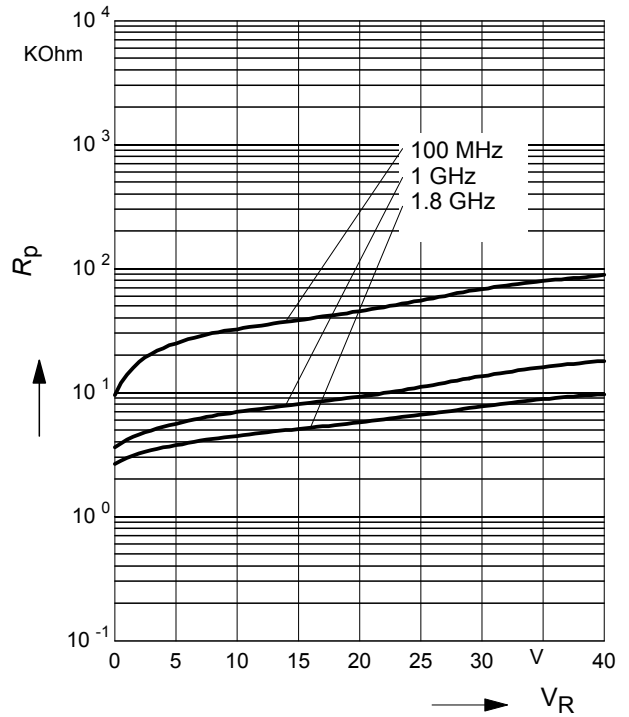


Forward resistance $r_f = f(I_F)$

$f = 100\text{MHz}$

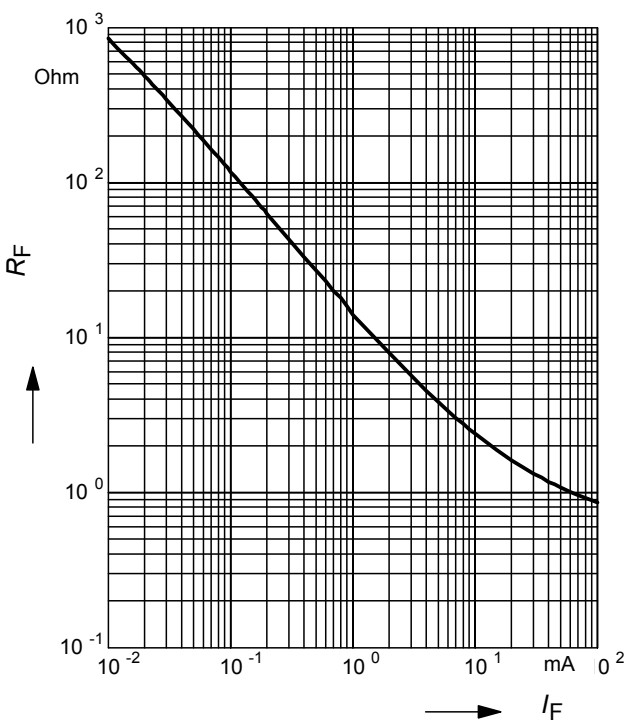


Forward current $I_F = f(V_F)$

$T_A = \text{Parameter}$

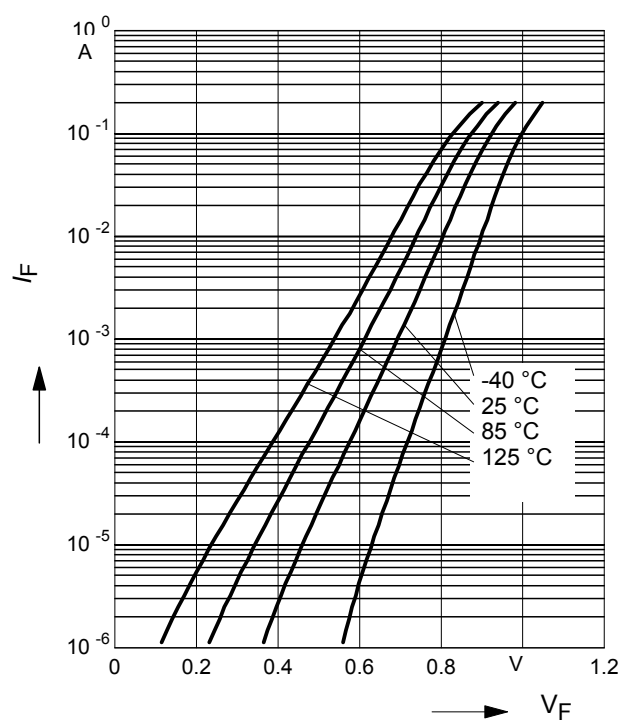


Intermodulation intercept point

$IP_3 = f(I_F)$; $f =$ Parameter

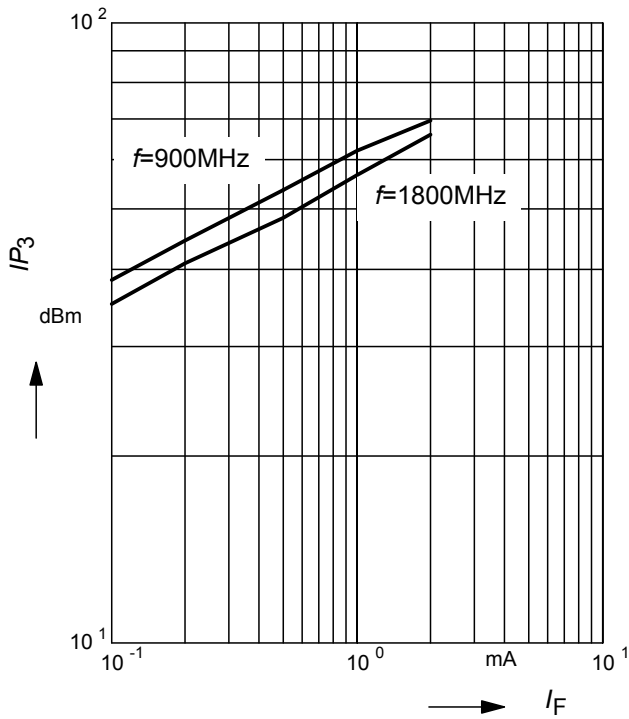


Forward current $I_F = f(T_S)$

BAR64-02L

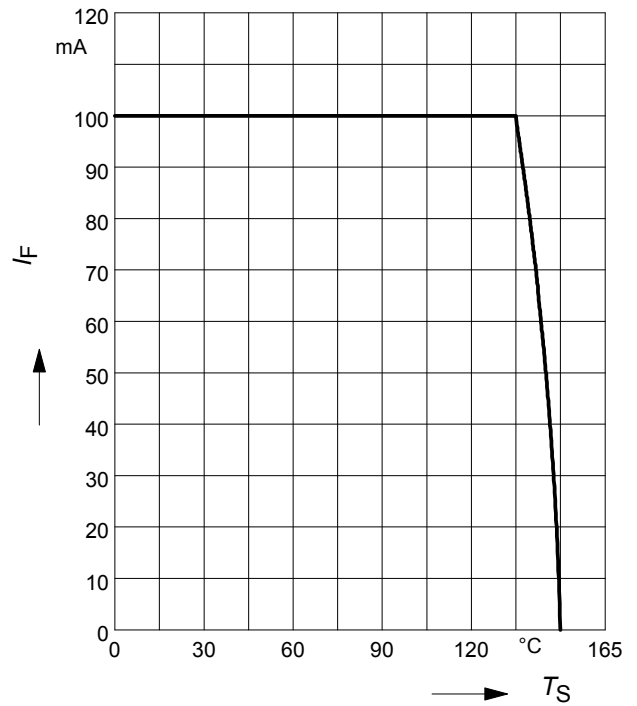


Forward current $I_F = f(T_S)$

BAR64-02V

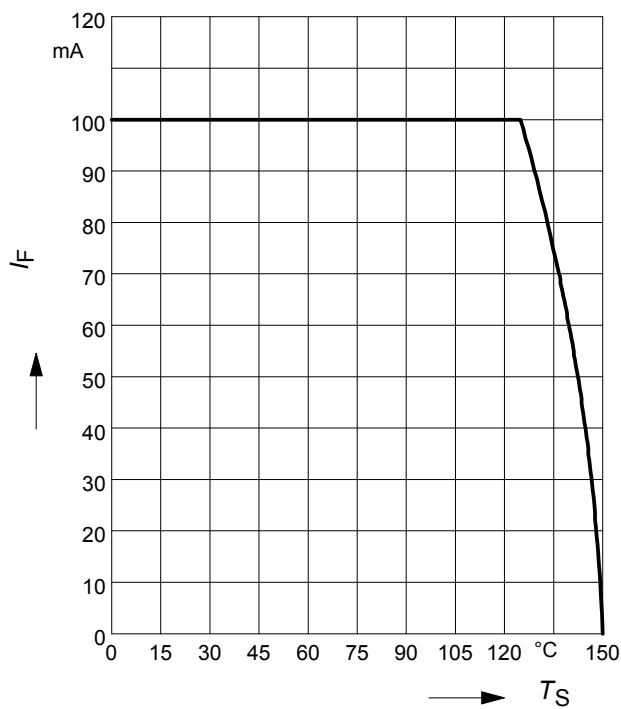


Forward current $I_F = f(T_S)$

BAR64-04, BAR64-06

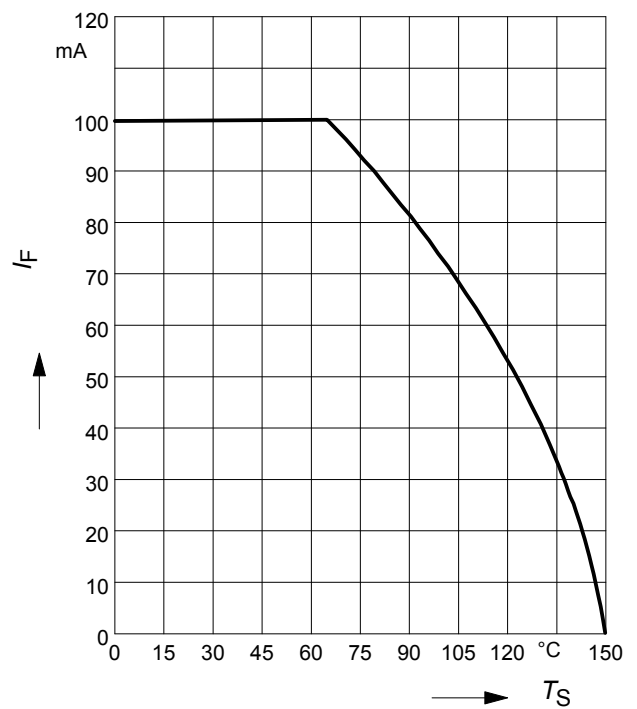


Forward current $I_F = f(T_S)$

BAR64-04T

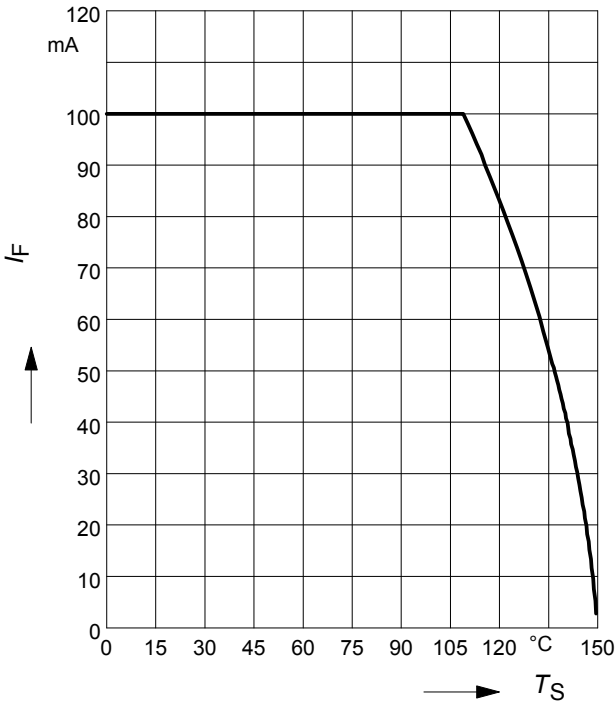

Permissible Puls Load $R_{thJS} = f(t_p)$


BAR64-02L

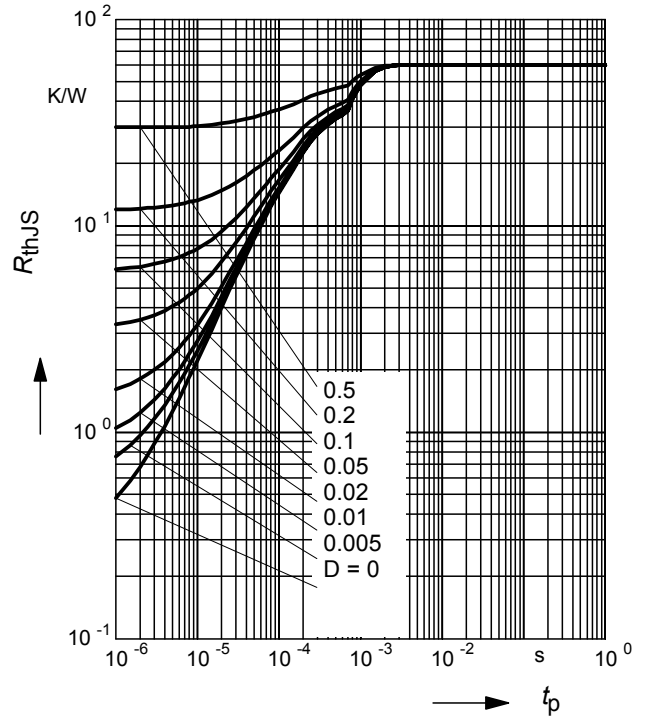

Permissible Pulse Load


$I_{Fmax}/I_{FDC} = f(t_p)$

BAR64-02L

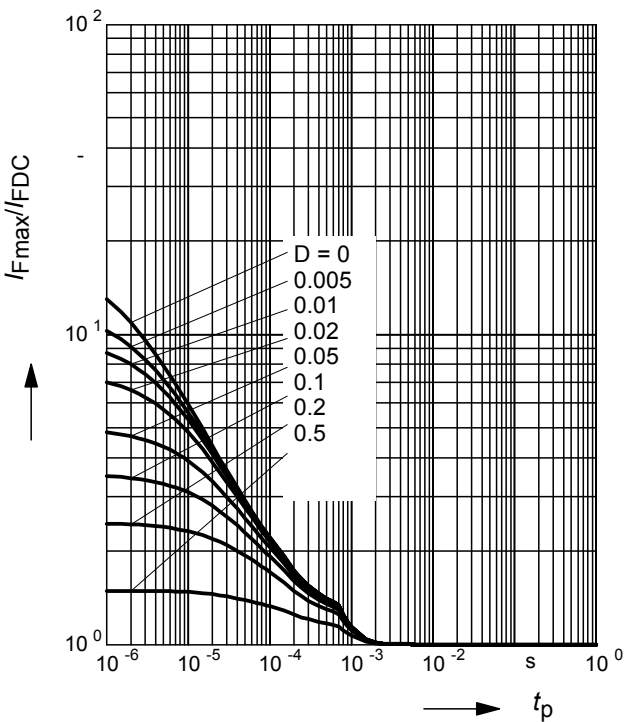

Permissible Puls Load $R_{thJS} = f(t_p)$


BAR64-02V

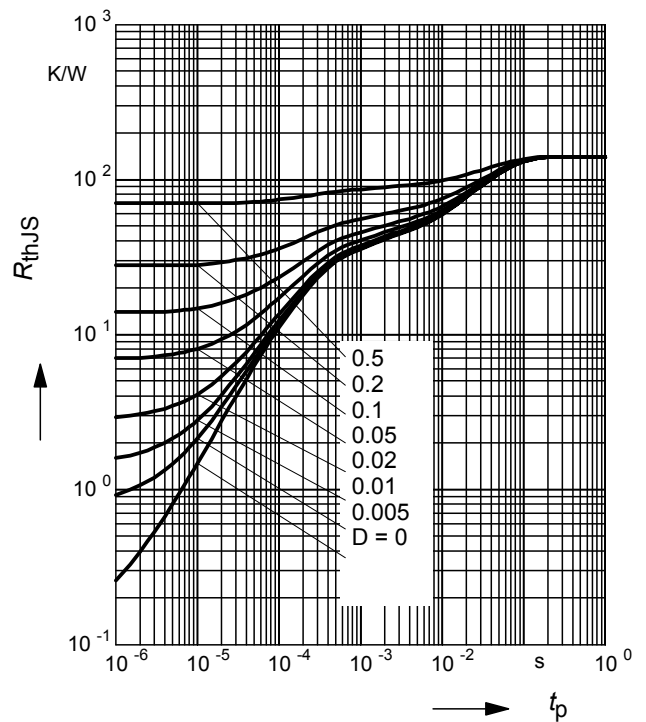

Permissible Pulse Load


$I_{Fmax} / I_{FDC} = f(t_p)$

BAR64-02V

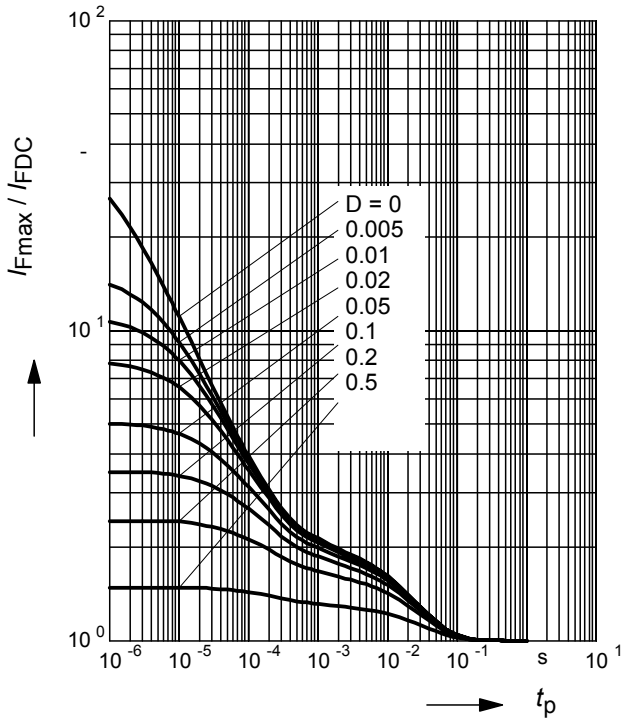

Permissible Puls Load $R_{thJS} = f(t_p)$


BAR64-04, BAR64-06

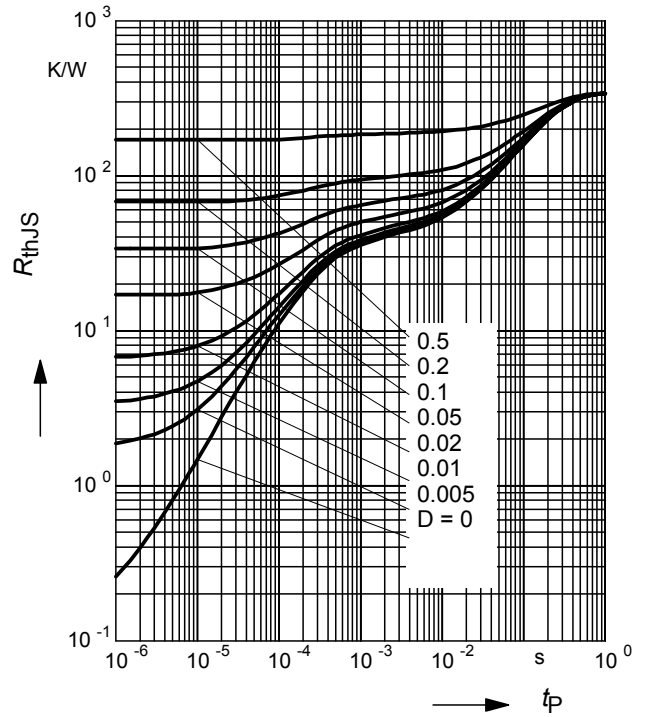

Permissible Pulse Load


$I_{Fmax} / I_{FDC} = f(t_p)$

BAR64-04, BAR64-06

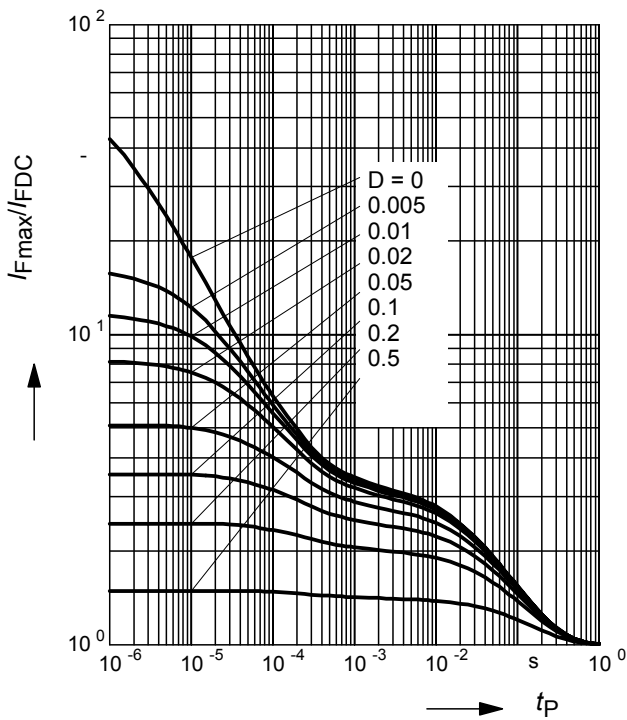

Permissible Puls Load $R_{thJS} = f(t_p)$


BAR64-04T

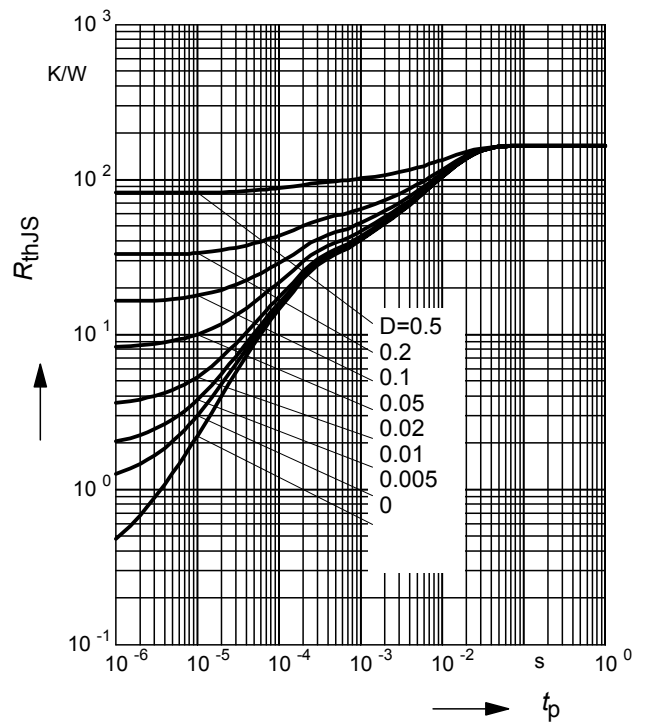

Permissible Pulse Load


$I_{Fmax} / I_{FDC} = f(t_p)$

BAR64-04T

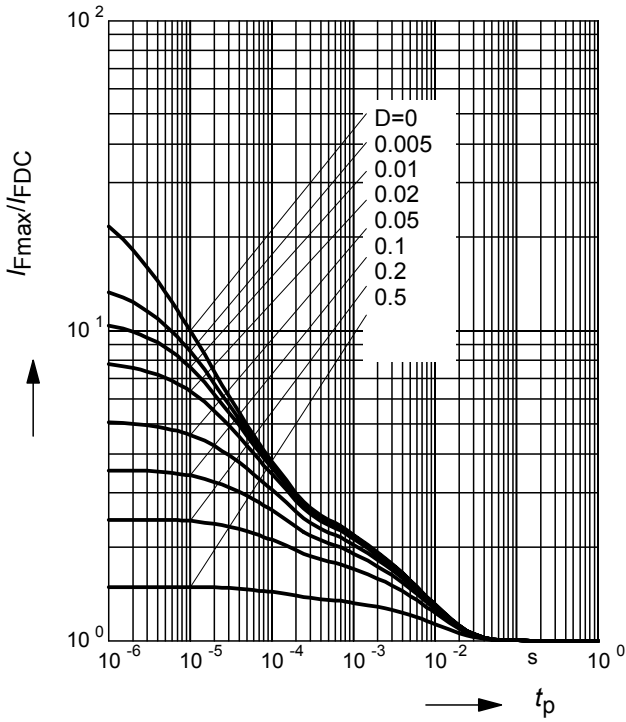

Permissible Puls Load $R_{thJS} = f(t_p)$


BAR64-04W, BAR64-06W

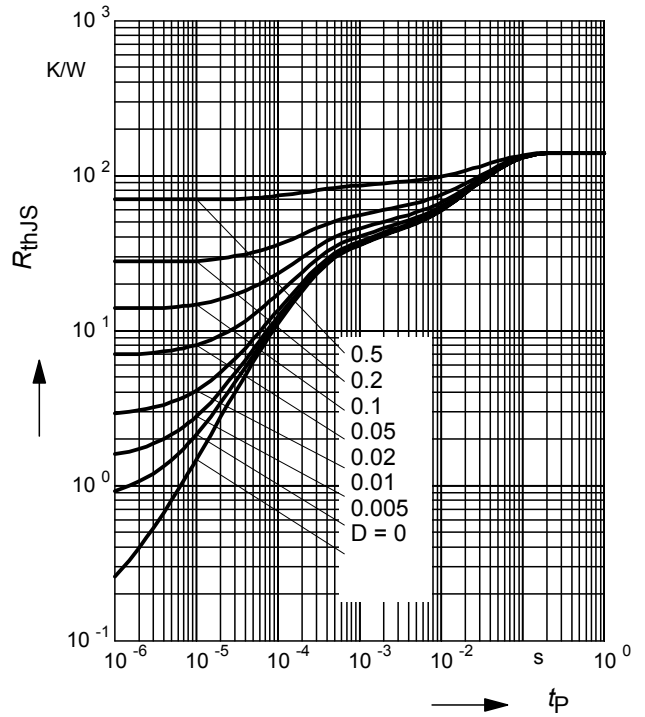

Permissible Pulse Load

$I_{Fmax} / I_{FDC} = f(t_p)$


BAR64-04W, BAR64-06W

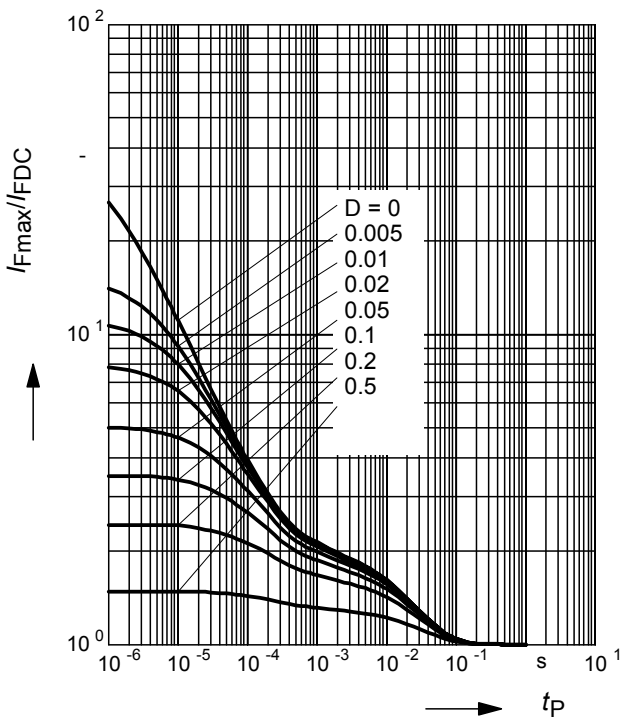

Insertion loss $|S_{21}|^2 = f(f)$

I_F = Parameter


BAR64-02L in series configuration, $Z = 50\Omega$

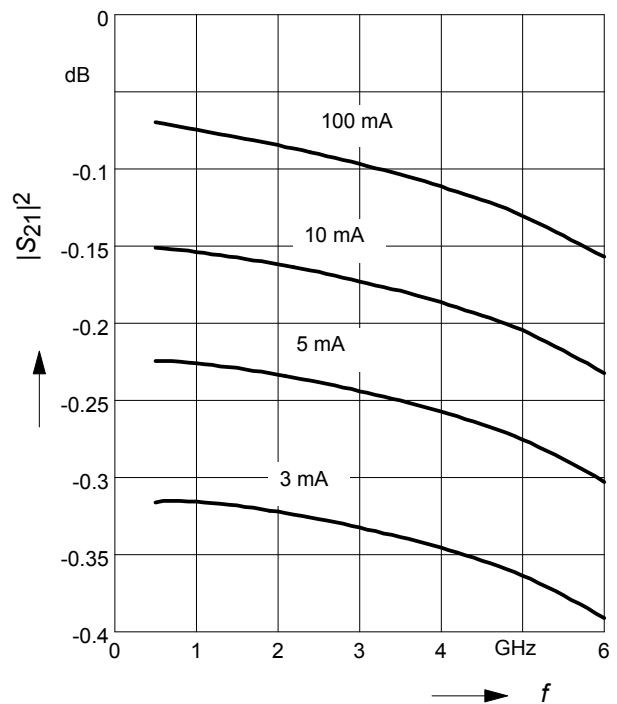

Isolation $|S_{21}|^2 = f(f)$

$V_R =$ Parameter

BAR64-02L in series configuration, $Z = 50\Omega$

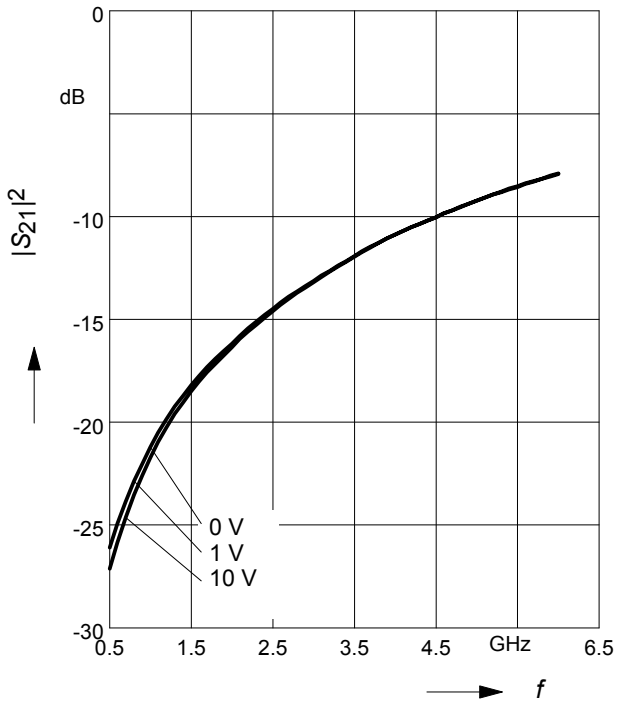

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.