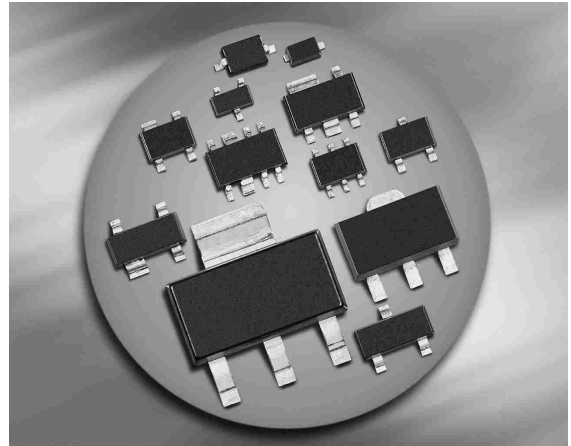



Silicon PIN Diode Array

- Surge protection device
- Designed for surge overvoltage clamping in antiparallel connection


BAR66


Type	Package	Configuration	L_S (nH)	Marking
BAR66	SOT23	series	1.8	PMs

Maximum Ratings at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Value	Unit
Diode reverse voltage	V_R	150	V
Forward current	I_F	200	mA
Total power dissipation $T_S \leq 25^\circ\text{C}$	P_{tot}	250	mW
Junction temperature	T_j	150	°C
Operating temperature range	T_{op}	-55 ... 125	
Storage temperature	T_{stg}	-55 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ¹⁾ , BAR66	R_{thJS}	≤ 290	K/W


¹⁾For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Breakdown voltage $I_{(BR)} = 5 \mu\text{A}$	$V_{(BR)}$	150	-	-	V
Reverse current $V_R = 100 \text{ V}$	I_R	-	-	20	nA
Forward voltage $I_F = 50 \text{ mA}$	V_F	-	0.95	1.2	V
AC Characteristics					
Diode capacitance $V_R = 35 \text{ V}, f = 1 \text{ MHz}$ $V_R = 0 \text{ V}, f = 100 \text{ MHz}$	C_T	-	0.4	0.6	pF
		-	0.35	0.9	
Zero bias conductance $V_R = 0 \text{ V}, f = 100 \text{ MHz}$	g_P	-	220	-	μs
Forward resistance $I_F = 5 \text{ mA}, f = 100 \text{ MHz}$	r_f	-	1.5	1.8	Ω
Charge carrier life time $I_F = 10 \text{ mA}, I_R = 6 \text{ mA}$, measured at $I_R = 3 \text{ mA}$, $R_L = 100 \Omega$	τ_{rr}	-	0.7	-	μs


Diode capacitance $C_T = f(V_R)$

$f =$ Parameter

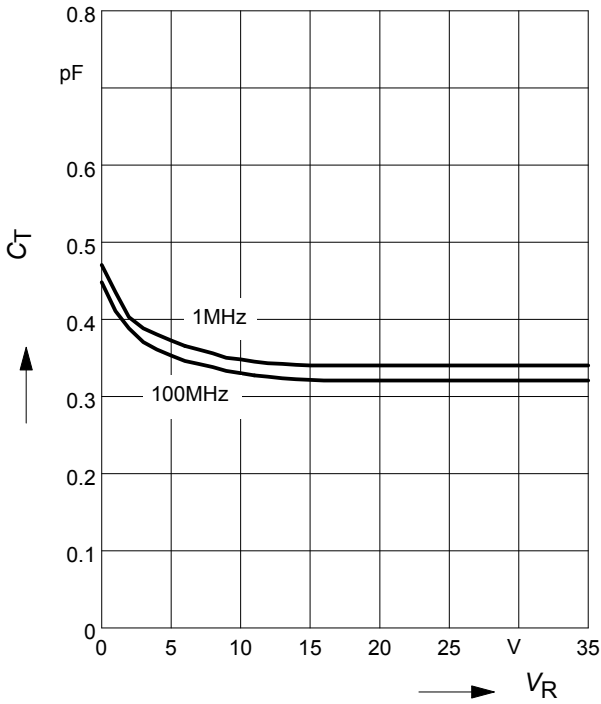


Forward resistance $r_f = f(I_F)$

$f = 100\text{MHz}$

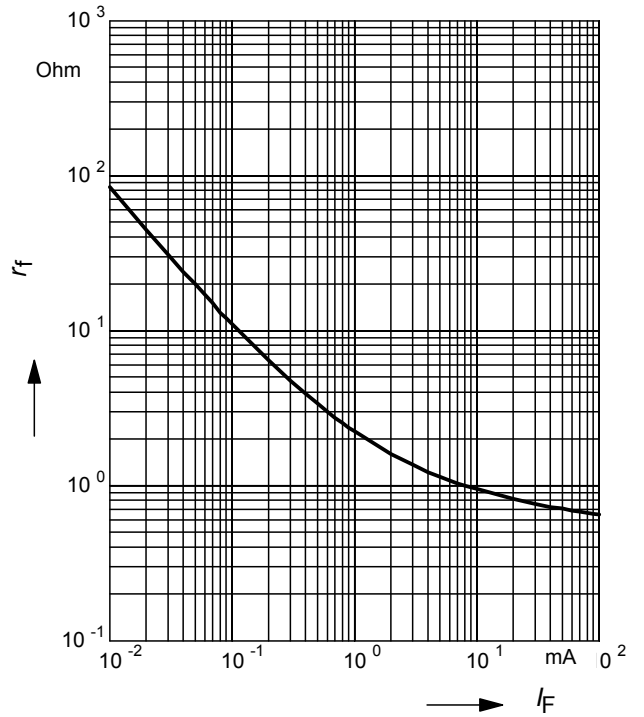


Forward current $I_F = f(V_F)$

$T_A =$ Parameter

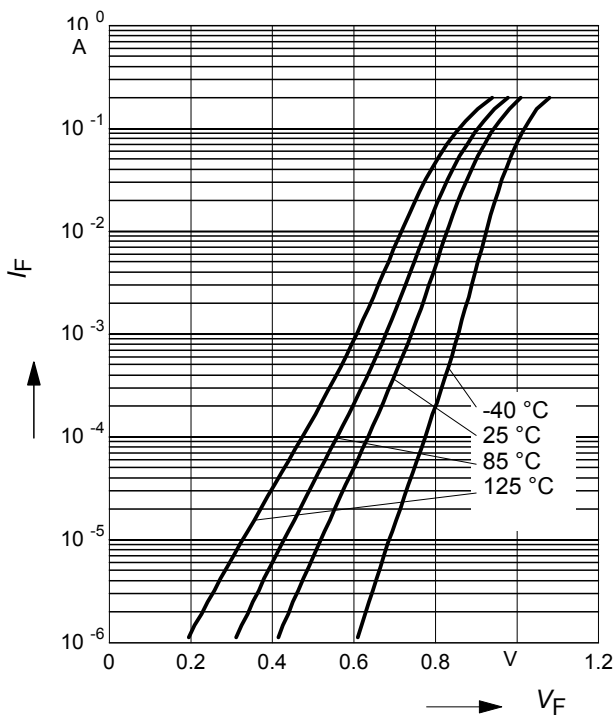


Forward current $I_F = f(T_S)$

BAR66

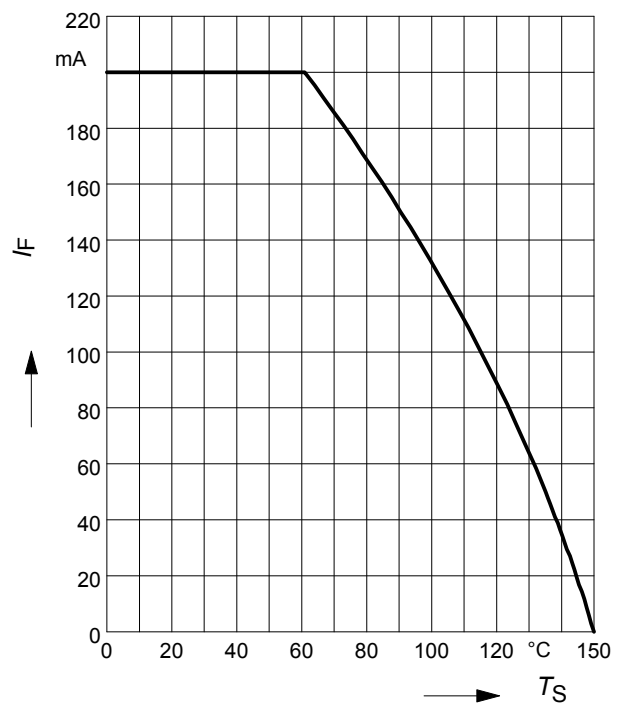

Permissible Puls Load $R_{thJS} = f(t_p)$


BAR66

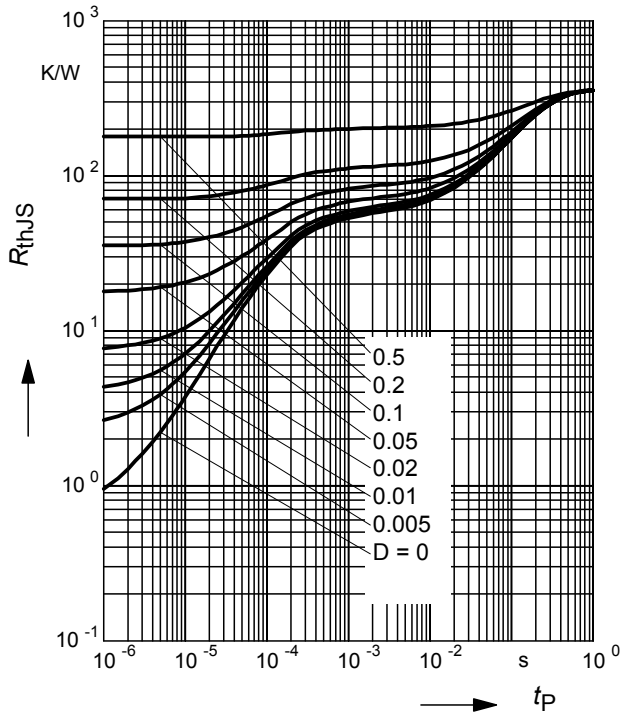

Permissible Pulse Load

$I_{Fmax} / I_{FDC} = f(t_p)$

BAR66

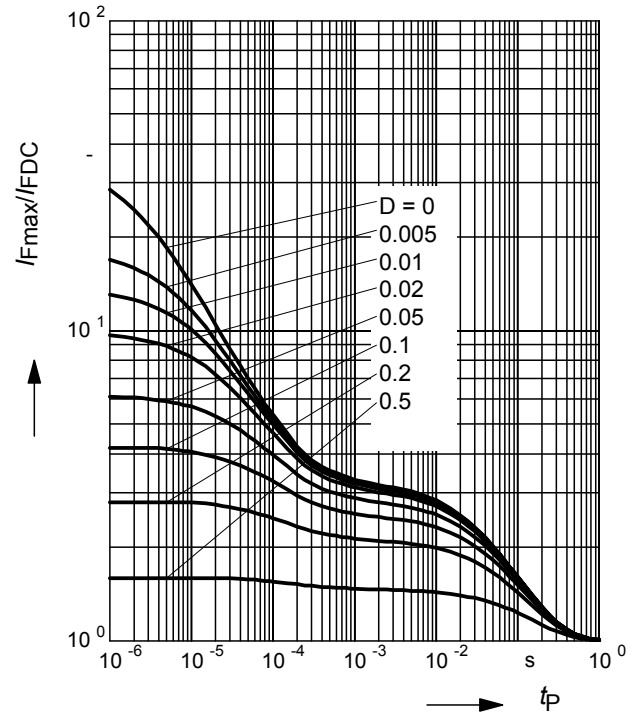



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.