

Directional Coupler 2.30–2.60 GHz




DC25-73

Features

- Low Cost
- Low Profile
- Available in Small SOT-6 Lead Package
- Tape & Reel

Description


The DC25-73 is a monolithic directional coupler tailored to the 2.30–2.60 GHz band. It offers low loss, good isolation, good input/output matching and exceptional coupling repeatability. It is available in the SOT-6 lead surface mount package.

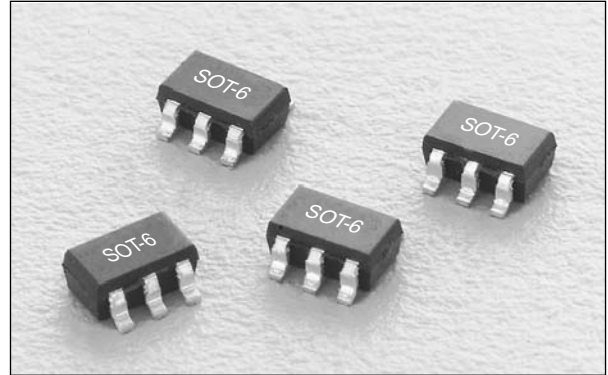


Electrical Specifications at 25°C

Parameter	Min.	Typ.	Max.	Unit
Frequency	2.30		2.60	GHz
Insertion Loss		0.2	0.3	dB
Isolation	30	33		dB
Input VSWR		1.1:1	1.3:1	
Output VSWR		1.1:1	1.3:1	
Coupling	18.2	17.2	16.2	dB
Coupled Port VSWR		1.3:1	1.5:1	


Pin Out

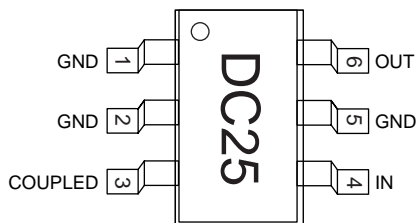


Block Diagram

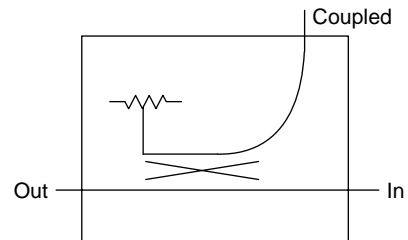


Typical Performance Data

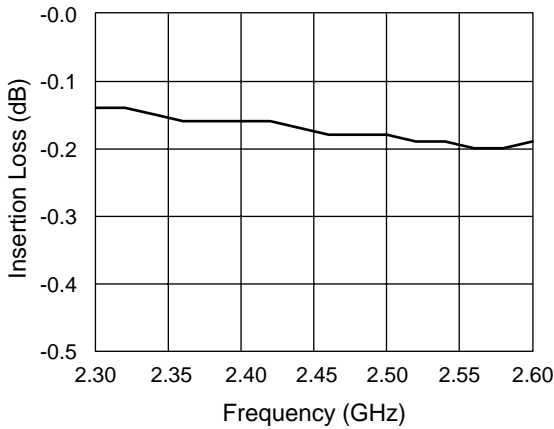


Insertion Loss vs. Frequency

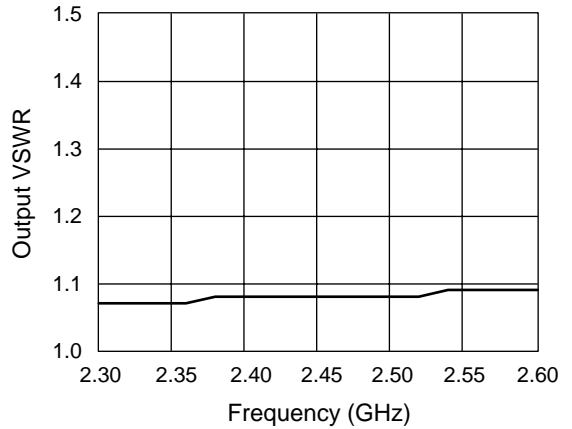


Output VSWR vs. Frequency

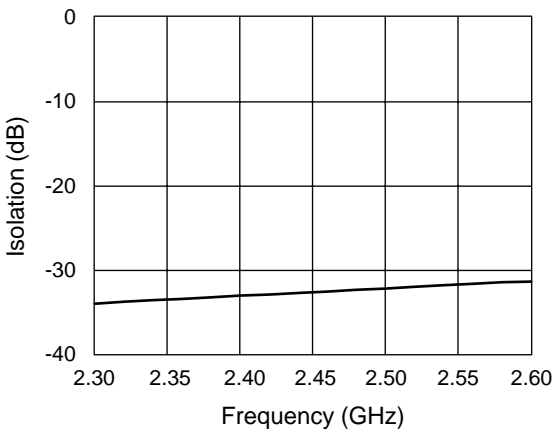


Isolation vs. Frequency

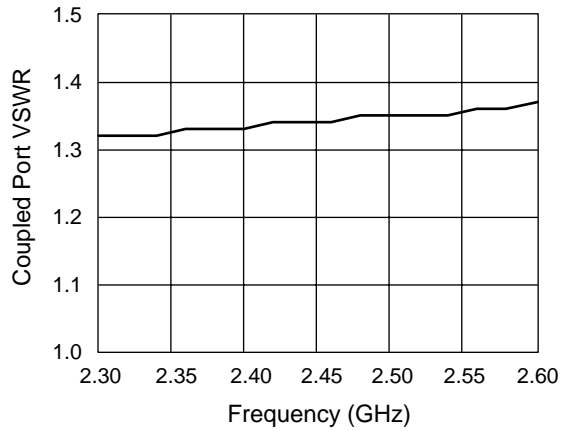

Coupled Port VSWR vs. Frequency

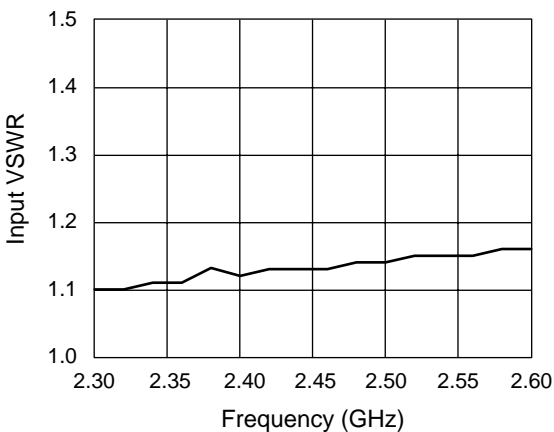

Input VSWR vs. Frequency

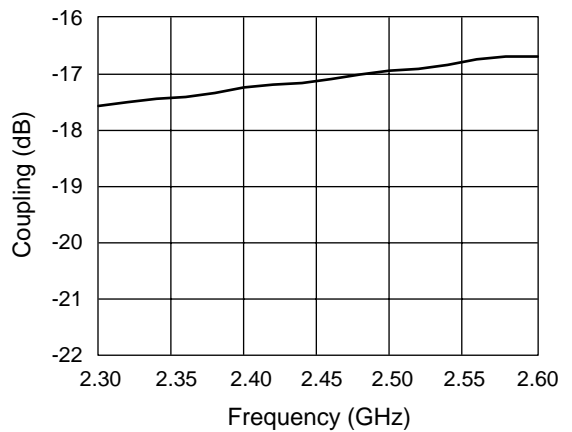


Coupling vs. Frequency

Absolute Maximum Ratings

Characteristic	Value
Input Power ¹	+4.0 W CW
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C


1. When operating with a 2.0:1 maximum VSWR on all ports.

Recommended Board Layout

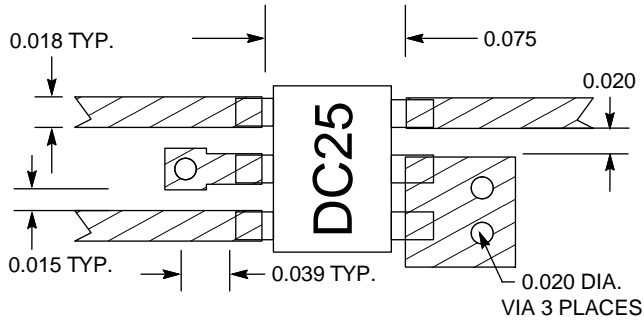

Material is 10 mil FR4

SOT-6

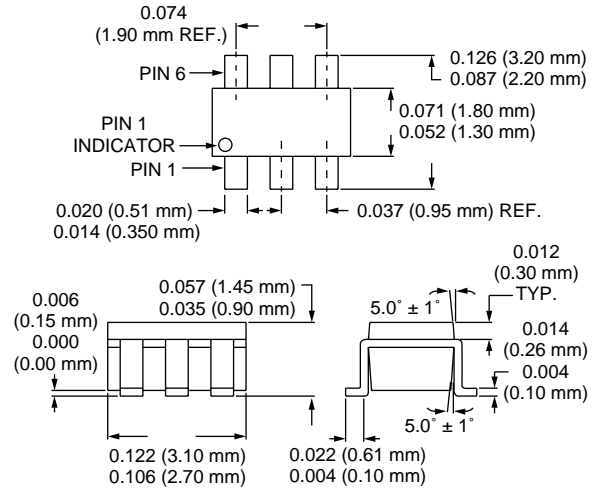



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.