


SOT223 NPN SILICON PLANAR HIGH CURRENT (HIGH PERFORMANCE) TRANSISTORS

FZT851
FZT853

ISSUE 2 - OCTOBER 1995

FEATURES

- * Extremely low equivalent on-resistance; $R_{CE(sat)}$ **44mΩ at 5A**
- * 6 Amps continuous current, up to 20 Amps peak current
- * Very low saturation voltages
- * Excellent h_{FE} characteristics specified up to 10 Amps



PARTMARKING DETAILS - DEVICE TYPE IN FULL

COMPLEMENTARY TYPES - FZT851 FZT951

FZT853 FZT953

ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	FZT851	FZT853	UNIT
Collector-Base Voltage	V_{CBO}	150	200	V
Collector-Emitter Voltage	V_{CEO}	60	100	V
Emitter-Base Voltage	V_{EBO}	6	6	V
Peak Pulse Current	I_{CM}	20	10	A
Continuous Collector Current	I_C	6		A
Power Dissipation at $T_{amb}=25^{\circ}C$	P_{tot}	3		W
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150		$^{\circ}C$

*The power which can be dissipated assuming the device is mounted in a typical manner on a P.C.B. with copper equal to 4 square inch minimum

FZT851


ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	150	220		V	$I_C=100\mu\text{A}$
Collector-Emitter Breakdown Voltage	$V_{(BR)CER}$	150	220		V	$I_C=1\mu\text{A}$, $R_B \leq 1\text{k}\Omega$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	60	85		V	$I_C=10\text{mA}^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	6	8		V	$I_E=100\mu\text{A}$
Collector Cut-Off Current	I_{CBO}			50 1	nA μA	$V_{CB}=120\text{V}$ $V_{CB}=120\text{V}$, $T_{amb}=100^{\circ}\text{C}$
Collector Cut-Off Current	I_{CER} $R \leq 1\text{k}\Omega$			50 1	nA μA	$V_{CB}=120\text{V}$ $V_{CB}=120\text{V}$, $T_{amb}=100^{\circ}\text{C}$
Emitter Cut-Off Current	I_{EBO}			10	nA	$V_{EB}=6\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$			50 100 170 375	mV mV mV mV	$I_C=0.1\text{A}$, $I_B=5\text{mA}^*$ $I_C=1\text{A}$, $I_B=50\text{mA}^*$ $I_C=2\text{A}$, $I_B=50\text{mA}^*$ $I_C=6\text{A}$, $I_B=300\text{mA}^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$			1200	mV	$I_C=6\text{A}$, $I_B=300\text{mA}^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$			1150	mV	$I_C=6\text{A}$, $V_{CE}=1\text{V}^*$
Static Forward Current Transfer Ratio	h_{FE}	100 100 75 25	200 200 120 50	300		$I_C=10\text{mA}$, $V_{CE}=1\text{V}$ $I_C=2\text{A}$, $V_{CE}=1\text{V}^*$ $I_C=5\text{A}$, $V_{CE}=1\text{V}^*$ $I_C=10\text{A}$, $V_{CE}=1\text{V}^*$
Transition Frequency	f_T		130		MHz	$I_C=100\text{mA}$, $V_{CE}=10\text{V}$ $f=50\text{MHz}$
Output Capacitance	C_{obo}		45		pF	$V_{CB}=10\text{V}$, $f=1\text{MHz}$
Switching Times	t_{on} t_{off}		45 1100		ns ns	$I_C=1\text{A}$, $I_{B1}=100\text{mA}$ $I_{B2}=100\text{mA}$, $V_{CC}=10\text{V}$

*Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$
 Spice parameter data is available upon request for this device

FZT851

TYPICAL CHARACTERISTICS

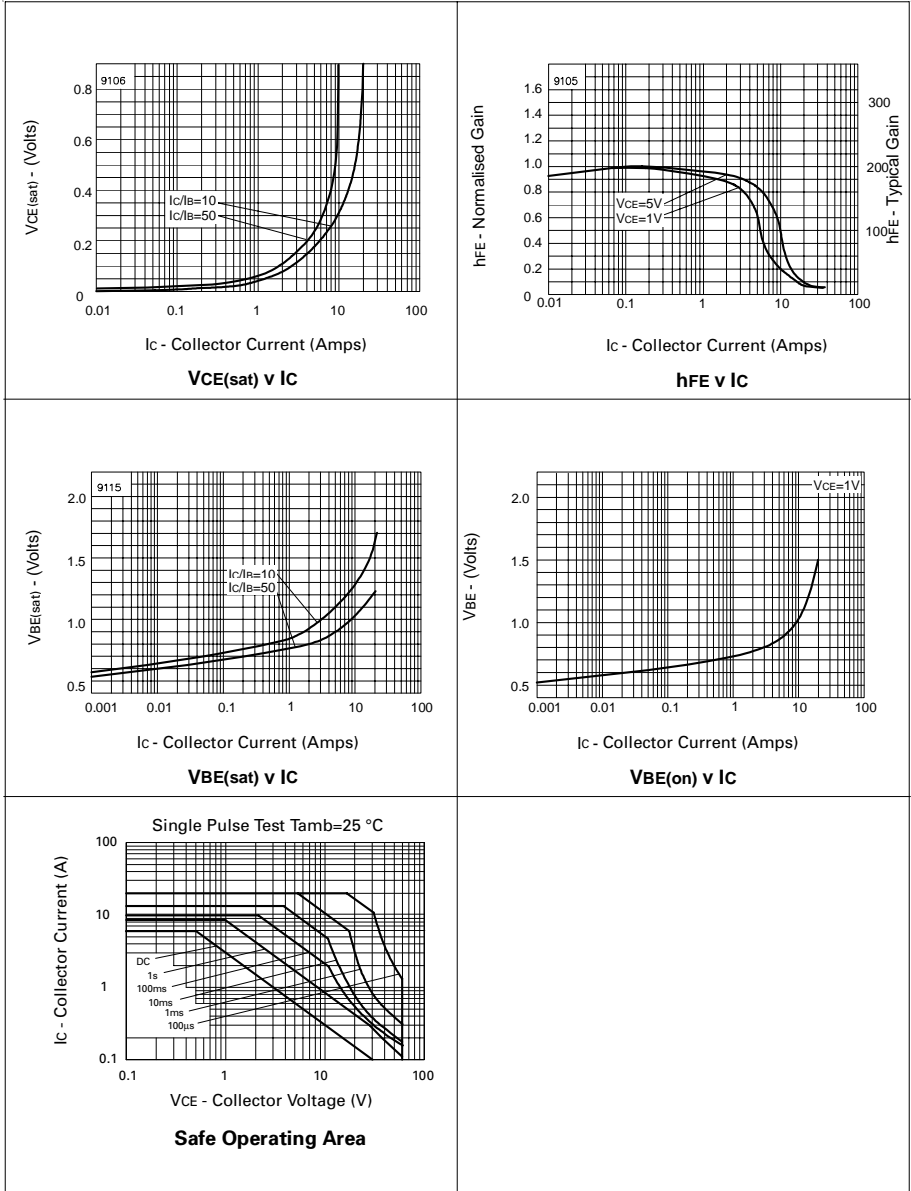



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.