

SOT223 PNP SILICON PLANAR HIGH CURRENT (HIGH PERFORMANCE) POWER TRANSISTOR


FZT968

ISSUE 3 – OCTOBER 1995

FEATURES

- * Extremely low equivalent on-resistance; $R_{CE(sat)} 44m\Omega$ at 5A
- * 6 Amps continuous current (Up to 20 Amps peak)
- * High gain and very low saturation voltage

PARTMARKING DETAIL – FZT968



ABSOLUTE MAXIMUM RATINGS.







PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	V_{CBO}	-15	V
Collector-Emitter Voltage	V_{CEO}	-12	V
Emitter-Base Voltage	V_{EBO}	-6	V
Peak Pulse Current	I_{CM}	-20	A
Continuous Collector Current	I_C	-6	A
Power Dissipation at $T_{amb}=25^\circ C$	P_{tot}	3	W
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	$^\circ C$

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ C$ unless otherwise stated)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.		
Breakdown Voltages	$V_{(BR)CBO}$	-15	-28		V	$I_C = -100\mu A$		
	$V_{(BR)CEO}$	-12	-20		V	$I_C = -10mA^*$		
	$V_{(BR)EBO}$	-6	-8		V	$I_E = -100\mu A$		
Collector Cut-Off Current	I_{CBO}			-10 -1.0	nA μA	$V_{CB} = -12V$ $V_{CB} = -12V, T_{amb} = 100^\circ C$		
Emitter Cut-Off Current	I_{EBO}			-10	nA	$V_{EB} = -6V$		
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		-65 -132 -360	-130 -170 -450	mV mV mV	$I_C = -500mA, I_B = -5mA^*$ $I_C = -2A, I_B = -50mA^*$ $I_C = -6A, I_B = -250mA^*$		
		Base-Emitter Saturation Voltage	$V_{BE(sat)}$		-1050	-1200	mV	$I_C = -6A, I_B = -250mA^*$
		Base-Emitter Turn-On Voltage	$V_{BE(on)}$		-870	-1050	mV	$I_C = -6A, V_{CE} = -1V^*$
Static Forward Current Transfer Ratio	h_{FE}	300	450	1000		$I_C = -10mA, V_{CE} = -1V^*$ $I_C = -500mA, V_{CE} = -1V^*$ $I_C = -5A, V_{CE} = -1V^*$ $I_C = -10A, V_{CE} = -1V^*$ $I_C = -20A, V_{CE} = -1V^*$		
		300	450					
		200	300					
		150	240					
		150	50					
Transition Frequency	f_T		80		MHz	$I_C = -100mA, V_{CE} = -10V$ $f = 50MHz$		
Output Capacitance	C_{obo}		161		pF	$V_{CB} = -20V, f = 1MHz$		
Switching Times	t_{on} t_{off}		120		ns	$I_C = -4A, I_B = -400mA$ $I_B = 400mA, V_{CE} = -10V$		
			116		ns			

*Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$
Spice parameter data is available upon request for this device

TYPICAL CHARACTERISTICS

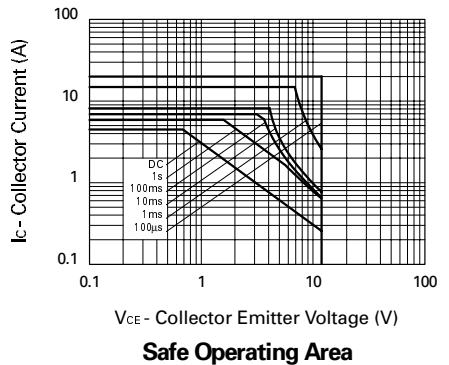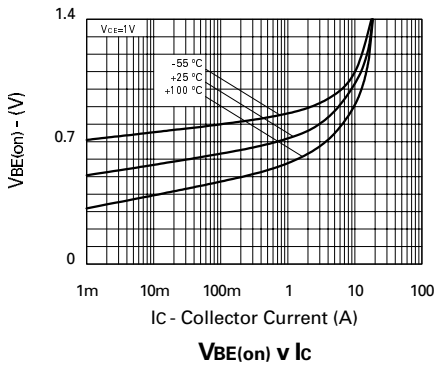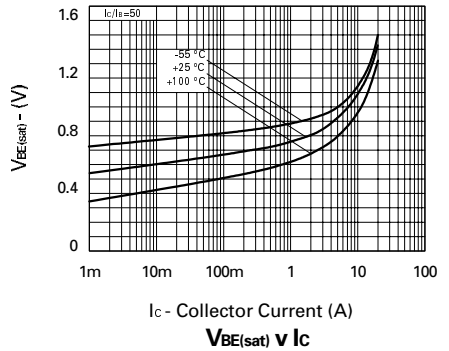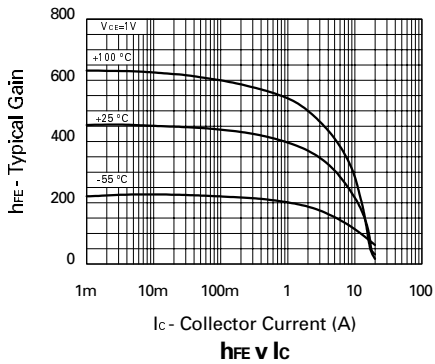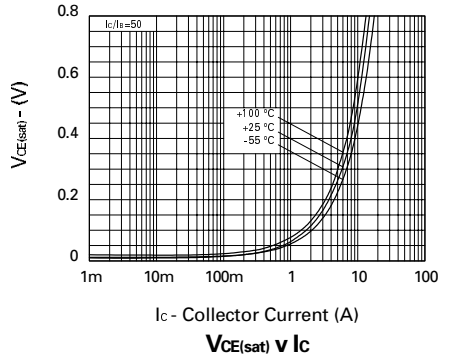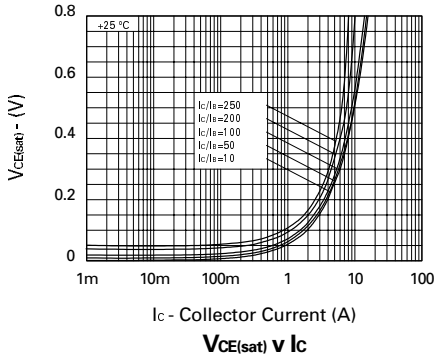



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.