


# SOT23 NPN SILICON PLANAR HIGH VOLTAGE HIGH PERFORMANCE TRANSISTOR

## FMMT497

ISSUE 3 – DECEMBER 1995    ☉

COMPLIMENTARY TYPE – FMMT597

PARTMARKING DETAIL – 497



SOT23

### ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	$V_{CBO}$	300	V
Collector-Emitter Voltage	$V_{CEO}$	300	V
Emitter-Base Voltage	$V_{EBO}$	5	V
Continuous Collector Current	$I_C$	500	mA
Peak Pulse Current	$I_{CM}$	1	A
Base Current	$I_B$	200	mA
Power Dissipation at $T_{amb}=25^{\circ}C$	$P_{tot}$	500	mW
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	$^{\circ}C$







### ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}C$ ).

PARAMETER	SYMBOL	MIN.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	300		V	$I_C=100\mu A$
Collector-Emitter Breakdown Voltage	$V_{CEO(sus)}$	300		V	$I_C=10mA^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	5		V	$I_E=100\mu A$
Collector Cut-Off Current	$I_{CBO}$		100	nA	$V_{CB}=250V$
Collector Cut-Off Current	$I_{CES}$		100	nA	$V_{CES}=250V$
Emitter Cut-Off Current	$I_{EBO}$		100	nA	$V_{EB}=4V$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		0.2 0.3	V	$I_C=100mA, I_B=10mA$ $I_C=250mA, I_B=25mA$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		1.0	V	$I_C=250mA, I_B=25mA$
Base-Emitter Turn On Voltage	$V_{BE(on)}$		1.0	V	$I_C=250mA, V_{CE}=10V$
Static Forward Current Transfer Ratio	$h_{FE}$	100 80 20	300		$I_C=1mA, V_{CE}=10V$ $I_C=100mA, V_{CE}=10V^*$ $I_C=250mA, V_{CE}=10V^*$
Transition Frequency	$f_T$	75		MHz	$I_C=50mA, V_{CE}=10V$ $f=100MHz$
Collector-Base Breakdown Voltage	$C_{obo}$		5	pF	$V_{CB}=10V, f=1MHz$

\*Measured under pulsed conditions. Pulse width=300 $\mu s$ . Duty cycle  $\leq 2\%$

# FMMT497

## TYPICAL CHARACTERISTICS

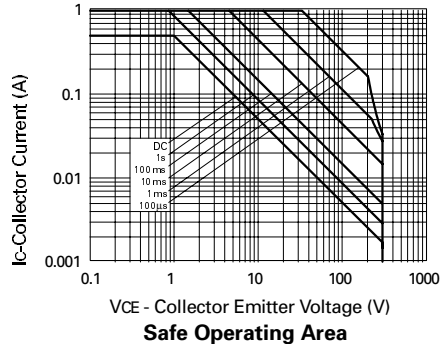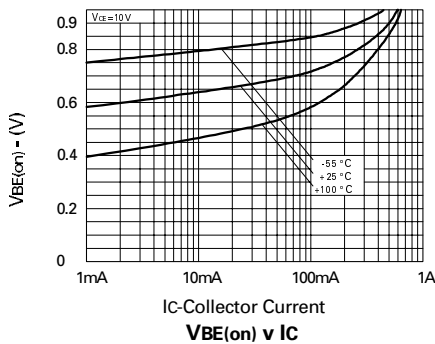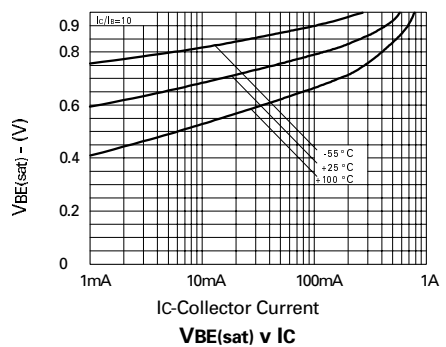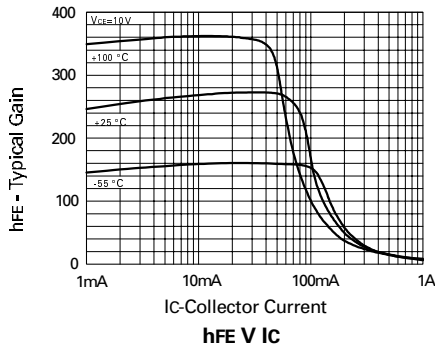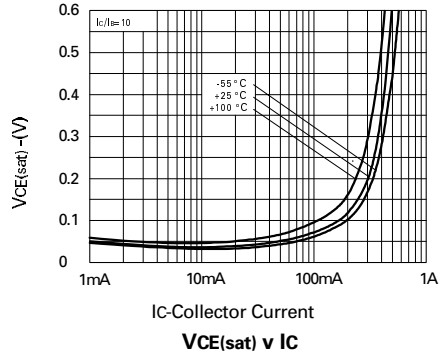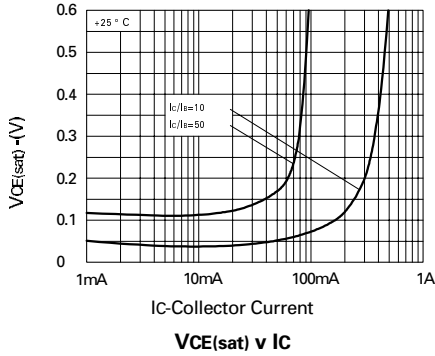



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.