


SOT23 PNP SILICON PLANAR HIGH VOLTAGE TRANSISTOR

ISSUE 3 - NOVEMBER 1995



FMMT596

PARTMARKING DETAIL – 596



ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	V_{CBO}	-220	V
Collector-Emitter Voltage	V_{CEO}	-200	V
Emitter-Base Voltage	V_{EBO}	-5	V
Peak Pulse Current	I_{CM}	-1	A
Continuous Collector Current	I_C	-0.3	A
Base Current	I_B	-200	mA
Power Dissipation at $T_{amb}=25^{\circ}C$	P_{tot}	500	mW
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	$^{\circ}C$







ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}C$).

PARAMETER	SYMBOL	MIN.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	-220		V	$I_C = -100\mu A$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	-200		V	$I_C = -10mA^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	-5		V	$I_E = -100\mu A$
Collector Cut-Off Current	I_{CBO}		-100	nA	$V_{CB} = -200V$
Emitter Cut-Off Current	I_{EBO}		-100	nA	$V_{EB} = -4V$
Collector-Emitter Cut-Off Current	I_{CES}		-100	nA	$V_{CES} = -200V$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		-0.2 -0.35	V	$I_C = -100mA, I_B = -10mA$ $I_C = -250mA, I_B = -25mA^*$
	$V_{BE(sat)}$		-1.0	V	$I_C = -250mA, I_B = -25mA^*$
Base-Emitter Turn-on Voltage	$V_{BE(on)}$		-0.9	V	$I_C = -250mA, V_{CE} = -10V^*$
Static Forward Current Transfer Ratio	h_{FE}	100 100 85 35	300		$I_C = -1mA, V_{CE} = -10V$ $I_C = -100mA, V_{CE} = -10V^*$ $I_C = -250mA, V_{CE} = -10V^*$ $I_C = -400mA, V_{CE} = -10V^*$
Transition Frequency	f_T	150		MHz	$I_C = -50mA, V_{CE} = -10V$ $f = 100MHz$
Output Capacitance	C_{obo}		10	pF	$V_{CB} = -10V, f = 1MHz$

*Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$

FMMT596

TYPICAL CHARACTERISTICS

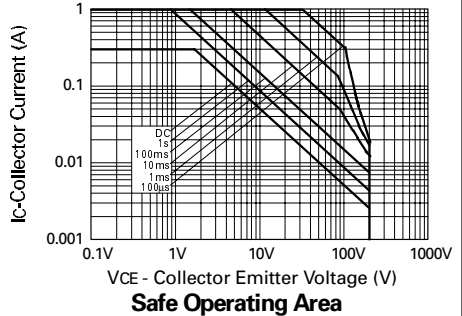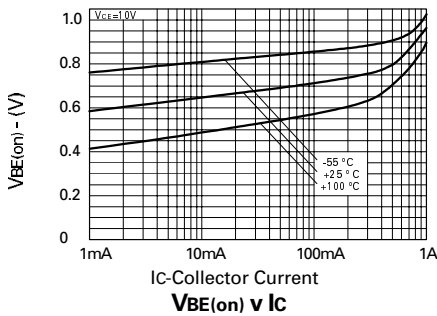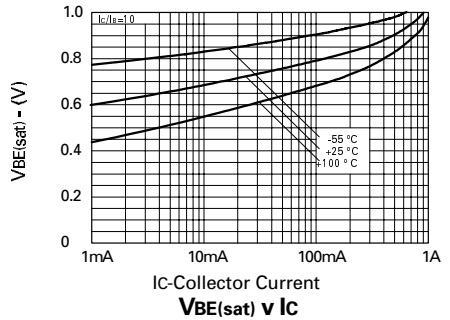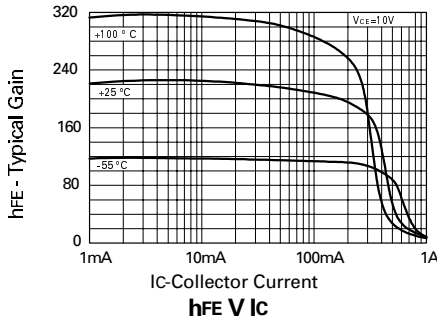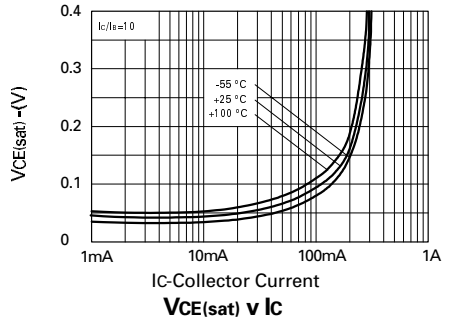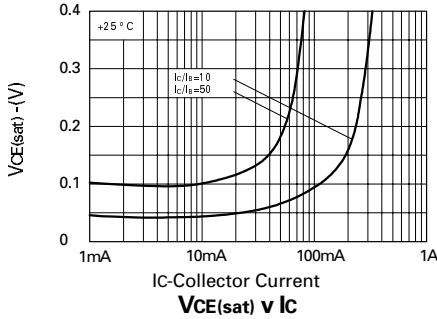



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.