


SMALL SIGNAL SCHOTTKY DIODE

FEATURES AND BENEFITS

- VERY SMALL CONDUCTION LOSSES
- NEGLIGIBLE SWITCHING LOSSES
- LOW FORWARD VOLTAGE DROP
- EXTREMELY FAST SWITCHING
- SURFACE MOUNT DEVICE

DESCRIPTION

Two separate Schottky barrier diodes encapsulated in a SOT-143 small SMD package.

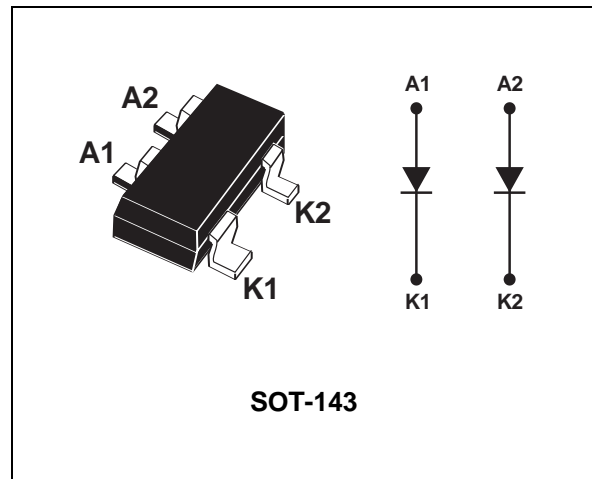

ABSOLUTE RATINGS (limiting values)

Symbol	Parameter	Value	Unit
V_{RRM}	Repetitive peak reverse voltage	30	V
I_{FRM}	Repetitive peak forward current $\delta = 0.33$	0.5	A
I_{FSM}	Surge non repetitive forward current ($t_p=10ms$ sinusoidal)	1	A
P_{tot}	Power Dissipation (note 1) $T_{amb} = 50^\circ C$	250	mW
T_{stg}	Maximum storage temperature range	- 65 to +150	$^\circ C$
T_j	Maximum operating junction temperature *	150	$^\circ C$
TL	Maximum temperature for soldering during 10s	260	$^\circ C$

Note 1: P_{tot} is the total dissipation of both diodes

* : $\frac{dP_{tot}}{dT_j} < \frac{1}{R_{th(j-a)}}$ thermal runaway condition for a diode on its own heatsink

BAT74

THERMAL RESISTANCE

Symbol	Parameter	Value	Unit
$R_{th(j-a)}$	Junction to Ambient (*)	400	$^{\circ}\text{C/W}$

(*) Mounted on epoxy board with recommended pad layout.

STATIC ELECTRICAL CHARACTERISTICS (per diode)

Symbol	Parameters	Tests conditions	Min.	Typ.	Max.	Unit	
V_F^*	Forward voltage drop	$T_j = 25^{\circ}\text{C}$	$I_F = 0.1 \text{ mA}$			240	mV
			$I_F = 1 \text{ mA}$			320	
			$I_F = 10 \text{ mA}$			400	
			$I_F = 30 \text{ mA}$			500	
			$I_F = 100 \text{ mA}$			900	
I_R^{**}	Reverse leakage current	$T_j = 25^{\circ}\text{C}$	$V_R = 30 \text{ V}$			1	μA
		$T_j = 100^{\circ}\text{C}$				100	

Pulse test: * $t_p = 380 \mu\text{s}$, $\delta < 2\%$

** $t_p = 5 \text{ ms}$, $\delta < 2\%$

DYNAMIC CHARACTERISTICS ($T_j = 25^{\circ}\text{C}$)

Symbol	Parameters	Tests conditions	Min.	Typ.	Max.	Unit
C	Junction Capacitance	$T_j = 25^{\circ}\text{C}$ $V_R = 1 \text{ V}$ $F = 1 \text{ MHz}$			10	pF
t_{rr}	Reverse Recovery Time	$I_F = 10 \text{ mA}$ $I_R = 10 \text{ mA}$ $T_j = 25^{\circ}\text{C}$ $I_{rr} = 1 \text{ mA}$ $R_L = 100 \Omega$			5	ns

Fig.1 : Average forward power dissipation versus average forward current.

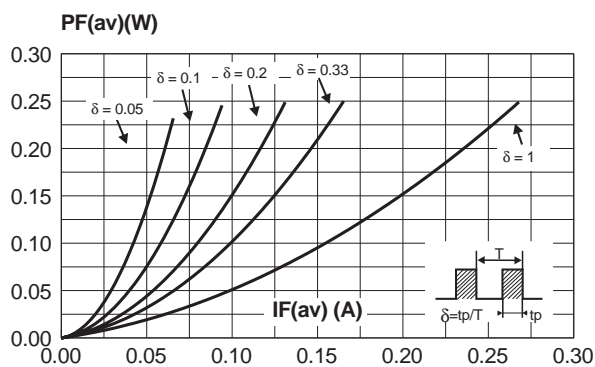


Fig.2 : Average forward current versus ambient temperature ($\delta = 0.33$).

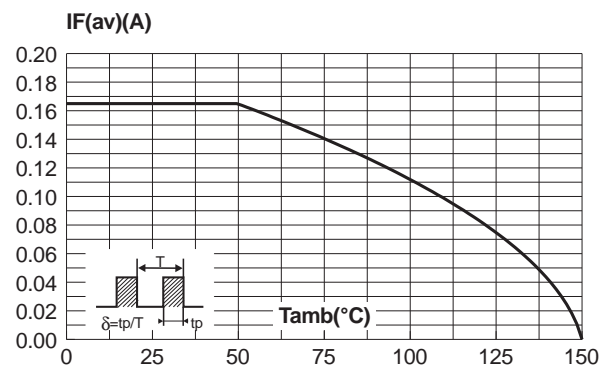


Fig.3 : Non repetitive surge peak forward current versus overload duration (maximum values).

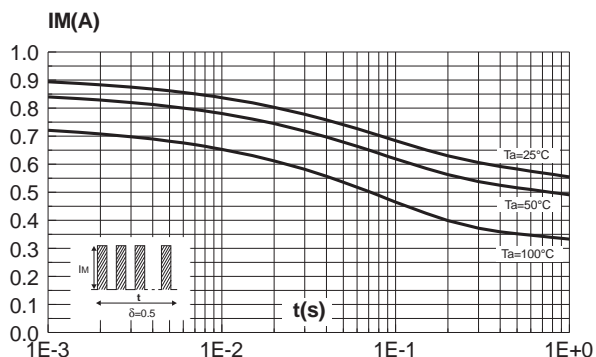


Fig.4 : Relative variation of thermal impedance junction to case versus pulse duration (alumine substrate 10mm x 8mm x 0.5mm).

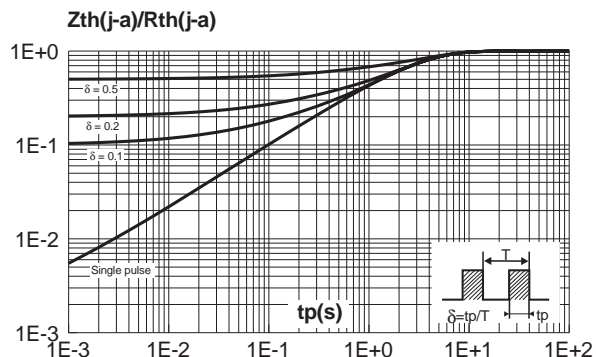


Fig.5 : Reverse leakage current versus reverse voltage applied (typical values).

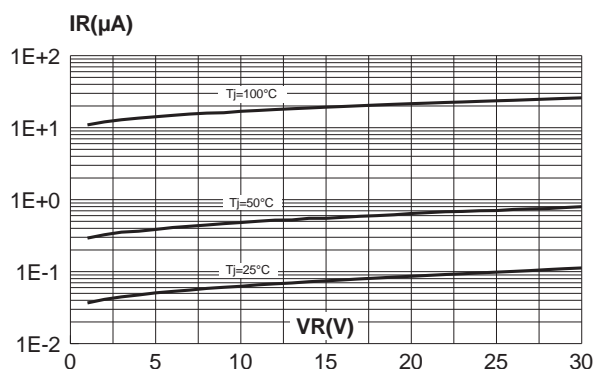


Fig.6 : Junction capacitance versus reverse voltage applied.

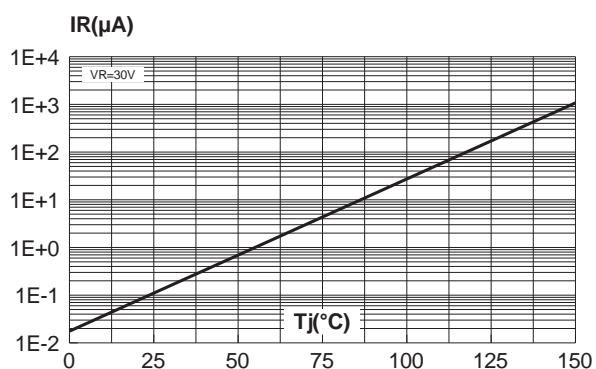


Fig.7 : Junction capacitance versus reverse voltage applied (typical values).



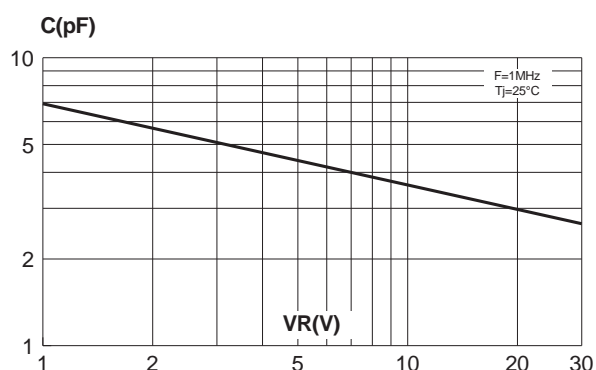


Fig.8 : Forward voltage drop versus forward current (typical values).

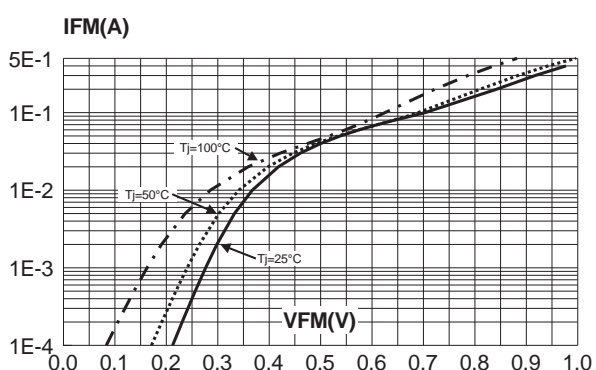


BAT74

PACKAGE MECHANICAL DATA SOT-143

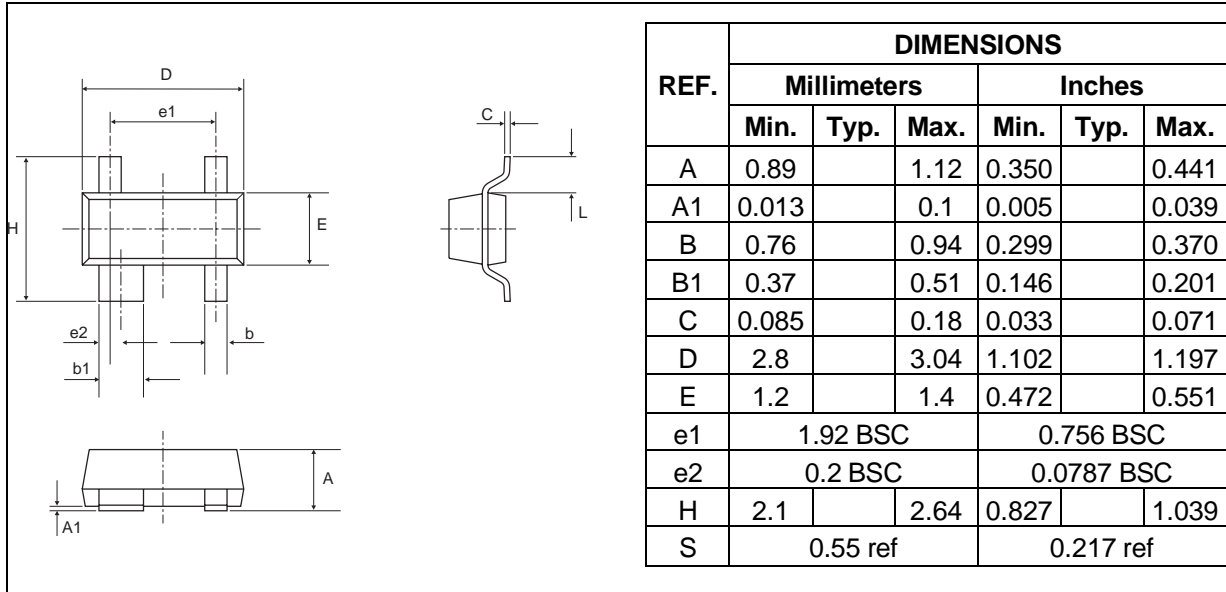

FOOTPRINT DIMENSIONS

(in millimeters)

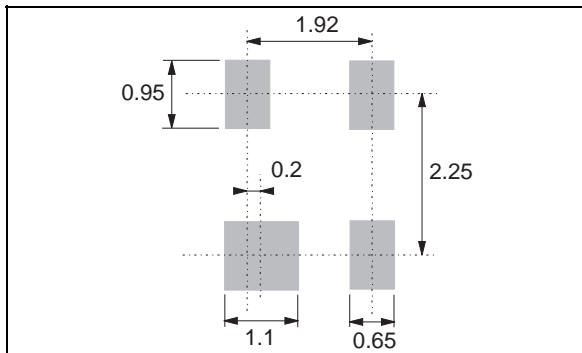

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
BAT74	D89	SOT-143	0.01g	3000	Tape & reel

■ Epoxy meets UL94,V0

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 1999 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia
Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.