



# BZT52C2V4 THRU BZT52C51

## Surface Mount Zener Diode



Voltage Range  
2.4 to 51 Volts  
500m Watts Power Dissipation


### Features

- ✧ Planar die construction
- ✧ 500 mW power dissipation on ceramic PCB
- ✧ Ideally suited for automated assembly processes
- ✧ General purpose, medium current

### Mechanical Data

- ✧ Case: SOD-123, Plastic
- ✧ Terminals: Solderable per MIL-STD-202, Method 208
- ✧ Polarity: Cathode band
- ✧ Marking: Date Code and Type Code or Date Code only
- ✧ Type Code: See table on Page 2
- ✧ Weight: 0.01 grams (approx.)

### SOD-123

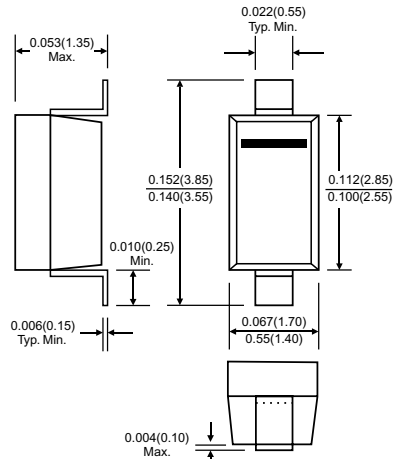

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.


### Maximum Ratings

Type Number	Symbol	Value	Units
Forward Voltage @ IF = 10mA	VF	0.9	V
Power Dissipation (Note 1)	Pd	500	mW
Thermal Resistance Junction to Ambient Air (Note 1)	RθJA	305	°C /W
Operating and Storage Temperature Range	TJ, TSTG	-65 to + 150	°C

- Notes: 1. Device Mounted on Ceramic PCB, 7.6mm x 9.4mm x 0.87mm with Pad Areas 25mm<sup>2</sup>  
 2. Tested with Pulses. Period = 5ms, Pulse Width = 300us.  
 3. When Provided, Otherwise, Parts are Provided with Date Code only, and Type Number Identifications Appears on reel only.  
 4. f = 1KHz.

## RATINGS AND CHARACTERISTIC CURVES (BZT52C2V4 - BZT52C51)

FIG.1- POWER DISSIPATION VS AMBIENT TEMPERATURE

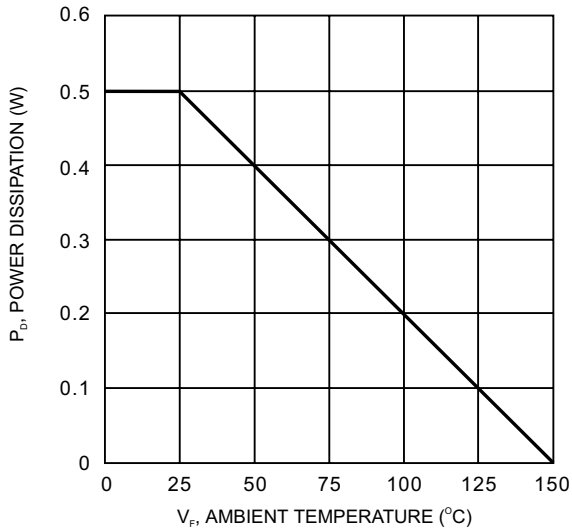

ELECTRICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

Device (Note 1)	Device Marking Code (Note 3)	Zener Voltage Range (Note 2)				Maximum Zener Impedance (Note 4)			Maximum Reverse Current		Typical Temperature Coefficient @ IZTC mV / °C		Test Current IZTC mA
		Vz @ Izt			IZT mA	ZZT @ IZT Ohms	ZZK @ IZK		IR uA	VR V	Min	Max	
		Nom (V)	Min (V)	Max (V)			mA	Ohms					
BZT52C2V4	W1	2.4	2.2	2.6	5.0	100	600	1.0	50	1.0	-3.5	0	5
BZT52C2V7	W2	2.7	2.5	2.9	5.0	100	600	1.0	20	1.0	-3.5	0	5
BZT52C3V0	W3	3.0	2.8	3.2	5.0	95	600	1.0	10	1.0	-3.5	0	5
BZT52C3V3	W4	3.3	3.1	3.5	5.0	95	600	1.0	5.0	1.0	-3.5	0	5
BZT52C3V6	W5	3.6	3.4	3.8	5.0	90	600	1.0	5.0	1.0	-3.5	0	5
BZT52C3V9	W6	3.9	3.7	4.1	5.0	90	600	1.0	3.0	1.0	-3.5	0	5
BZT52C4V3	W7	4.3	4.0	4.6	5.0	90	600	1.0	3.0	1.0	-3.5	0	5
BZT52C4V7	W8	4.7	4.4	5.0	5.0	80	500	1.0	3.0	2.0	-3.5	0.2	5
BZT52C5V1	W9	5.1	4.8	5.4	5.0	60	480	1.0	2.0	2.0	-2.7	1.2	5
BZT52C5V6	WA	5.6	5.2	6.0	5.0	40	400	1.0	1.0	2.0	-2.0	2.5	5
BZT52C6V2	WB	6.2	5.8	6.6	5.0	10	150	1.0	3.0	4.0	0.4	3.7	5
BZT52C6V8	WC	6.8	6.4	7.2	5.0	15	80	1.0	2.0	4.0	1.2	4.5	5
BZT52C7V5	WD	7.5	7.0	7.9	5.0	15	80	1.0	1.0	5.0	2.5	5.3	5
BZT52C8V2	WE	8.2	7.7	8.7	5.0	15	80	1.0	0.7	5.0	3.2	6.1	5
BZT52C9V1	WF	9.1	8.5	9.6	5.0	15	100	1.0	0.5	6.0	3.8	7.0	5
BZT52C10	WG	10	9.4	10.6	5.0	20	150	1.0	0.2	7.0	4.5	8.0	5
BZT52C11	WH	11	10.4	11.6	5.0	20	150	1.0	0.1	8.0	5.4	9.0	5
BZT52C12	WI	12	11.4	12.7	5.0	25	150	1.0	0.1	8.0	6.0	10.0	5
BZT52C13	WK	13	12.4	14.1	5.0	30	170	1.0	0.1	8.0	7.0	11.0	5
BZT52C15	WL	15	13.8	15.6	5.0	30	200	1.0	0.1	10.5	9.2	13.0	5
BZT52C16	WM	16	15.3	17.1	5.0	40	200	1.0	0.1	11.2	10.4	14.0	5
BZT52C18	WN	18	16.8	19.1	5.0	45	225	1.0	0.1	12.6	12.4	16.0	5
BZT52C20	WO	20	18.8	21.2	5.0	55	225	1.0	0.1	14.0	14.4	18.0	5
BZT52C22	WP	22	20.8	23.3	5.0	55	250	1.0	0.1	15.4	16.4	20.0	5
BZT52C24	WR	24	22.8	25.6	5.0	70	250	1.0	0.1	16.8	18.4	22.0	5
BZT52C27	WS	27	25.1	28.9	2.0	80	300	0.5	0.1	18.9	21.4	25.3	2
BZT52C30	WT	30	28	32	2.0	80	300	0.5	0.1	21.0	24.4	29.4	2
BZT52C33	WU	33	31	35	2.0	80	325	0.5	0.1	23.1	27.4	33.4	2
BZT52C36	WW	36	34	38	2.0	90	350	0.5	0.1	25.2	30.4	37.4	2
BZT52C39	WX	39	37	41	2.0	130	350	0.5	0.1	27.3	33.4	41.2	2
BZT52C43	WY	43	40	46	5.0	100	700	1.0	0.1	32	10.0	12.0	5
BZT52C47	WZ	47	44	50	5.0	100	750	1.0	0.1	35	10.0	12.0	5
BZT52C51	WX1	51	48	54	5.0	100	750	1.0	0.1	38	10.0	12.0	5

Notes: 1. Device mounted on ceramic PCB; 7.6mm x 9.4mm x 0.87mm with pad areas 25mm.

2. Tested with pulses, 300us pulse width, period = 5ms.

3. When provided, otherwise, parts are provided with date code only, and type number identifications appears on reel only.

4. f = 1KHz.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.