

# LM117QML

## 3-Terminal Adjustable Regulator

### General Description

The LM117 series of adjustable 3-terminal positive voltage regulators is capable of supplying either 0.5A or 1.5A over a 1.2V to 37V output range. They are exceptionally easy to use and require only two external resistors to set the output voltage. Further, both line and load regulation are better than standard fixed regulators.

In addition to higher performance than fixed regulators, the LM117 series offers full overload protection available only in IC's. Included on the chip are current limit, thermal overload protection and safe area protection. All overload protection circuitry remains fully functional even if the adjustment terminal is disconnected.

Normally, no capacitors are needed unless the device is situated more than 6 inches from the input filter capacitors in which case an input bypass is needed. An optional output capacitor can be added to improve transient response. The adjustment terminal can be bypassed to achieve very high ripple rejection ratios which are difficult to achieve with standard 3-terminal regulators.

Besides replacing fixed regulators, the LM117 is useful in a wide variety of other applications. Since the regulator is

“floating” and sees only the input-to-output differential voltage, supplies of several hundred volts can be regulated as long as the maximum input to output differential is not exceeded, i.e., avoid short-circuiting the output.

Also, it makes an especially simple adjustable switching regulator, a programmable output regulator, or by connecting a fixed resistor between the adjustment pin and output, the LM117 can be used as a precision current regulator. Supplies with electronic shutdown can be achieved by clamping the adjustment terminal to ground which programs the output to 1.2V where most loads draw little current.

For the negative complement, see LM137 series data sheet.


### Features

- Available with Radiation Guarantee
- Guaranteed max. 0.3% load regulation (LM117)
- Guaranteed 0.5A or 1.5A output current
- Adjustable output down to 1.2V
- Current limit constant with temperature
- 80 dB ripple rejection
- Output is short-circuit protected

### Ordering Information

| NS Part Number             | JAN Part Number                | NS Package Number | Package Description |
|----------------------------|--------------------------------|-------------------|---------------------|
| LM117E/883                 |                                | E20A              | 20LD LCC            |
| LM117H/883                 |                                | H03A              | 3LD T0-39 Metal Can |
| LM117HRQMLV<br>(Note 11)   | 5962R9951703VXA<br>100K rd(Si) | H03A              | 3LD T0-39 Metal Can |
| LM117HRLQMLV<br>(Note 12)  | 5962R9951705VXA<br>100K rd(Si) | H03A              | 3LD T0-39 Metal Can |
| LM117K/883                 |                                | K02C              | 2LD T0-3 Metal Can  |
| LM117KRQMLV<br>(Note 11)   | 5962R9951704VYA<br>100K rd(Si) | K02C              | 2LD T0-3 Metal Can  |
| LM117WG/883                |                                | WG16A             | 16LD Ceramic SOIC   |
| LM117WG-QMLV               | 5962-9951703VZA                | WG16A             | 16LD Ceramic SOIC   |
| LM117WGRQMLV<br>(Note 11)  | 5962R9951703VZA<br>100K rd(Si) | WG16A             | 16LD Ceramic SOIC   |
| LM117WGRLQMLV<br>(Note 12) | 5962R9951705VZA<br>100K rd(Si) | WG16A             | 16LD Ceramic SOIC   |


## Connection Diagrams



CASE IS OUTPUT


20143630

Bottom View  
Steel Package  
NS Package Number K02C

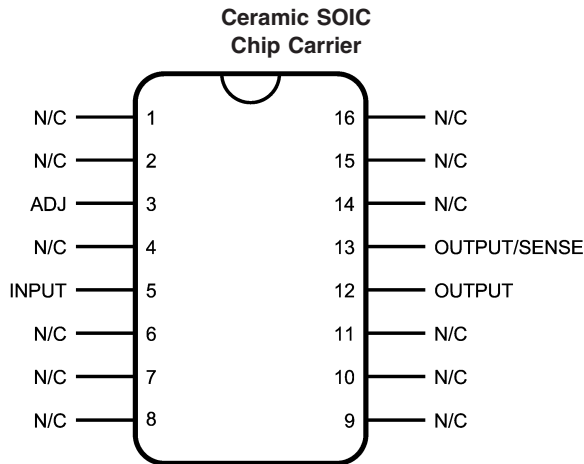

Top View  
NS Package Number WG16A  
(Note 4)


20143667

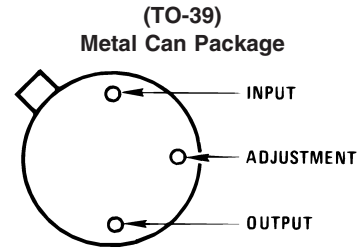

CASE IS OUTPUT

20143631

Bottom View  
NS Package Number H03A

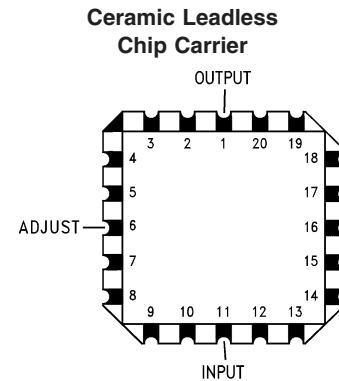

20143634

Top View  
NS Package Number E20A

## LM117 Series Packages

| Part Number Suffix | Package      | Design Load Current |
|--------------------|--------------|---------------------|
| K                  | TO-3         | 1.5A                |
| H                  | TO-39        | 0.5A                |
| WG                 | Ceramic SOIC | 0.5A                |
| E                  | LCC          | 0.5A                |



## Absolute Maximum Ratings (Note 1)

|   |  |
|---|--|
| Power Dissipation (Note 2)                  | Internally Limited                                       |
| Input-Output Voltage Differential           | +40V, -0.3V  |
| Storage Temperature                         | $-65^{\circ}\text{C} \leq T_A \leq +150^{\circ}\text{C}$ |
| Maximum Junction Temperature ( $T_{Jmax}$ ) | +150°C   |
| Lead Temperature Metal Package              | 300°C  |
| Thermal Resistance                          |  |
| $\theta_{JA}$                               |  |
| T0-3 Still Air                              | 39°C/W   |
| T0-3 500LF/Min Air flow                     | 14°C/W   |
| T0-39 Still Air                             | 186°C/W  |
| T0-39 500LF/Min Air flow                    | 64°C/W   |
| Ceramic SOIC Still Air                      | 115°C/W  |
| Ceramic SOIC 500LF/Min Air flow             | 66°C/W   |
| LCC Still Air                               | 88°C/W   |
| LCC 500LF/Min Air flow                      | 62°C/W   |
| $\theta_{JC}$                               |  |
| T0-3  | 1.9°C/W  |
| T0-39 Metal Can                             | 21°C/W   |
| Ceramic SOIC (Note 5)                       | 3.4°C/W  |
| LCC   | 12°C/W   |
| Package Weight                              |  |
| T0-39 Metal Can                             | TBD  |
| SOIC  | 365mg  |
| ESD Tolerance (Note 3)                      | 3KV  |

## Recommended Operating Conditions

|                             |  |
|-----------------------------|--|
| Operating Temperature Range | $-55^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ |
| Input Voltage Range         | 4.25V to 41.25V  |

## Quality Conformance Inspection

MIL-STD-883, Method 5005 - Group A

| Subgroup | Description         | Temp °C |
|----------|---------------------|---------|
| 1        | Static tests at     | 25      |
| 2        | Static tests at     | 125     |
| 3        | Static tests at     | -55     |
| 4        | Dynamic tests at    | 25      |
| 5        | Dynamic tests at    | 125     |
| 6        | Dynamic tests at    | -55     |
| 7        | Functional tests at | 25      |
| 8A       | Functional tests at | 125     |
| 8B       | Functional tests at | -55     |
| 9        | Switching tests at  | 25      |
| 10       | Switching tests at  | 125     |
| 11       | Switching tests at  | -55     |
| 12       | Settling time at    | 25      |
| 13       | Settling time at    | 125     |
| 14       | Settling time at    | -55     |

## LM117H & WG Electrical Characteristics

### DC Parameters

The following conditions apply, unless otherwise specified.

DC:  $V_{\text{Diff}} = (V_I - V_O)$ ,  $I_L = 8\text{mA}$

| Symbol                                | Parameter                 | Conditions   | Notes    | Min   | Max  | Unit          | Sub groups |
|---------------------------------------|---------------------------|--|----------|-------|------|---------------|------------|
| $I_{\text{Adj}}$                      | Adjustment Pin Current    | $V_{\text{Diff}} = 3\text{V}$  |          |       | 100  | $\mu\text{A}$ | 1          |
|                                       |                           | $V_{\text{Diff}} = 3.3\text{V}$  |          |       | 100  | $\mu\text{A}$ | 2, 3       |
|                                       |                           | $V_{\text{Diff}} = 40\text{V}$   |          |       | 100  | $\mu\text{A}$ | 1, 2, 3    |
| $I_{\text{Q}}$                        | Minimum Load Current      | $V_{\text{Diff}} = 3\text{V}$ , $V_{\text{O}} = 1.7\text{V}$   |          |       | 5.0  | $\text{mA}$   | 1          |
|                                       |                           | $V_{\text{Diff}} = 3.3\text{V}$ , $V_{\text{O}} = 1.7\text{V}$   |          |       | 5.0  | $\text{mA}$   | 2, 3       |
|                                       |                           | $V_{\text{Diff}} = 40\text{V}$ , $V_{\text{O}} = 1.7\text{V}$  |          |       | 5.0  | $\text{mA}$   | 1, 2, 3    |
| $V_{\text{Ref}}$                      | Reference Voltage         | $V_{\text{Diff}} = 3\text{V}$  |          | 1.2   | 1.3  | $\text{V}$    | 1          |
|                                       |                           | $V_{\text{Diff}} = 3.3\text{V}$  |          | 1.2   | 1.3  | $\text{V}$    | 2, 3       |
|                                       |                           | $V_{\text{Diff}} = 40\text{V}$   |          | 1.2   | 1.3  | $\text{V}$    | 1, 2, 3    |
| $V_{\text{RLine}}$                    | Line Regulation           | $3\text{V} \leq V_{\text{Diff}} \leq 40\text{V}$ ,<br>$V_{\text{O}} = 1.2\text{V}$                               |          | -8.9  | 8.9  | $\text{mV}$   | 1          |
|                                       |                           | $3.3\text{V} \leq V_{\text{Diff}} \leq 40\text{V}$ ,<br>$V_{\text{O}} = 1.2\text{V}$                             |          | -22.2 | 22.2 | $\text{mV}$   | 2, 3       |
|                                       |                           |  |          |       |      |               |            |
| $V_{\text{RLoad}}$                    | Load Regulation           | $V_{\text{Diff}} = 3\text{V}$ ,<br>$I_L = 10\text{mA}$ to $500\text{mA}$   |          | -15   | 15   | $\text{mV}$   | 1          |
|                                       |                           | $V_{\text{Diff}} = 3.3\text{V}$ ,<br>$I_L = 10\text{mA}$ to $500\text{mA}$                                       |          | -15   | 15   | $\text{mV}$   | 2, 3       |
|                                       |                           | $V_{\text{Diff}} = 40\text{V}$ ,<br>$I_L = 10\text{mA}$ to $150\text{mA}$  |          | -15   | 15   | $\text{mV}$   | 1          |
|                                       |                           | $V_{\text{Diff}} = 40\text{V}$ ,<br>$I_L = 10\text{mA}$ to $100\text{mA}$  |          | -15   | 15   | $\text{mV}$   | 2, 3       |
| $\Delta I_{\text{Adj}} / \text{Load}$ | Adjustment Current Change | $V_{\text{Diff}} = 3\text{V}$ ,<br>$I_L = 10\text{mA}$ to $500\text{mA}$   |          | -5.0  | 5.0  | $\mu\text{A}$ | 1          |
|                                       |                           | $V_{\text{Diff}} = 3.3\text{V}$ ,<br>$I_L = 10\text{mA}$ to $500\text{mA}$                                       |          | -5.0  | 5.0  | $\mu\text{A}$ | 2, 3       |
|                                       |                           | $V_{\text{Diff}} = 40\text{V}$ ,<br>$I_L = 10\text{mA}$ to $150\text{mA}$  |          | -5.0  | 5.0  | $\mu\text{A}$ | 1          |
|                                       |                           | $V_{\text{Diff}} = 40\text{V}$ ,<br>$I_L = 10\text{mA}$ to $100\text{mA}$  |          | -5.0  | 5.0  | $\mu\text{A}$ | 2, 3       |
| $\Delta I_{\text{Adj}} / \text{Line}$ | Adjustment Current Change | $3\text{V} \leq V_{\text{Diff}} \leq 40\text{V}$   |          | -5.0  | 5.0  | $\mu\text{A}$ | 1          |
|                                       |                           | $3.3\text{V} \leq V_{\text{Diff}} \leq 40\text{V}$   |          | -5.0  | 5.0  | $\mu\text{A}$ | 2, 3       |
| $I_{\text{OS}}$                       | Short Circuit Current     | $V_{\text{Diff}} = 10\text{V}$   |          | 0.45  | 1.6  | $\text{A}$    | 1          |
| $\theta_{\text{R}}$                   | Thermal Regulation        | $T_{\text{A}} = 25^\circ\text{C}$ , $t = 20\text{ms}$ ,<br>$V_{\text{Diff}} = 40\text{V}$ , $I_L = 150\text{mA}$ |          | -6.0  | 6.0  | $\text{mV}$   | 1          |
| $I_{\text{CL}}$                       | Current Limit             | $V_{\text{Diff}} \leq 15\text{V}$  | (Note 6) | 0.5   |      | $\text{A}$    | 1, 2, 3    |
|                                       |                           | $V_{\text{Diff}} = 40\text{V}$   | (Note 6) | 0.15  |      | $\text{A}$    | 1          |

### AC Parameters

| Symbol | Parameter        | Conditions  | Notes    | Min | Max | Unit        | Subgroups |
|--------|------------------|---|----------|-----|-----|-------------|-----------|
| RR     | Ripple Rejection | $V_I = +6.25\text{V}$ , $V_{\text{O}} = V_{\text{Ref}}$ ,<br>$f = 120\text{Hz}$ , $e_1 = 1V_{\text{RMS}}$ ,<br>$I_L = 125\text{mA}$ | (Note 7) | 66  |     | $\text{dB}$ | 4, 5, 6   |

## LM117K Electrical Characteristics

### DC Parameters

The following conditions apply, unless otherwise specified.

DC:  $V_{\text{Diff}} = (V_I - V_O)$ ,  $I_L = 10\text{mA}$

| Symbol                                | Parameter                 | Conditions  | Notes    | Min   | Max  | Unit          | Sub groups |
|---------------------------------------|---------------------------|---|----------|-------|------|---------------|------------|
| $I_{\text{Adj}}$                      | Adjustment Pin Current    | $V_{\text{Diff}} = 3\text{V}$   |          |       | 100  | $\mu\text{A}$ | 1          |
|                                       |                           | $V_{\text{Diff}} = 3.3\text{V}$   |          |       | 100  | $\mu\text{A}$ | 2, 3       |
|                                       |                           | $V_{\text{Diff}} = 40\text{V}$  |          |       | 100  | $\mu\text{A}$ | 1, 2, 3    |
| $I_{\text{O}}$                        | Minimum Load Current      | $V_{\text{Diff}} = 3\text{V}$ , $V_{\text{O}} = 1.7\text{V}$  |          |       | 5.0  | $\text{mA}$   | 1          |
|                                       |                           | $V_{\text{Diff}} = 3.3\text{V}$ , $V_{\text{O}} = 1.7\text{V}$  |          |       | 5.0  | $\text{mA}$   | 2, 3       |
|                                       |                           | $V_{\text{Diff}} = 40\text{V}$ , $V_{\text{O}} = 1.7\text{V}$   |          |       | 5.0  | $\text{mA}$   | 1, 2, 3    |
| $V_{\text{Ref}}$                      | Reference Voltage         | $V_{\text{Diff}} = 3\text{V}$   |          | 1.2   | 1.3  | $\text{V}$    | 1          |
|                                       |                           | $V_{\text{Diff}} = 3.3\text{V}$   |          | 1.2   | 1.3  | $\text{V}$    | 2, 3       |
|                                       |                           | $V_{\text{Diff}} = 40\text{V}$  |          | 1.2   | 1.3  | $\text{V}$    | 1, 2, 3    |
| $V_{\text{RLine}}$                    | Line Regulation           | $3\text{V} \leq V_{\text{Diff}} \leq 40\text{V}$ ,<br>$V_{\text{O}} = 1.2\text{V}$  |          | -8.9  | 8.9  | $\text{mV}$   | 1          |
|                                       |                           | $3.3\text{V} \leq V_{\text{Diff}} \leq 40\text{V}$ ,<br>$V_{\text{O}} = 1.2\text{V}$  |          | -22.2 | 22.2 | $\text{mV}$   | 2, 3       |
| $V_{\text{RLoad}}$                    | Load Regulation           | $V_{\text{Diff}} = 3\text{V}$ ,<br>$I_{\text{L}} = 10\text{mA}$ to 1.5A   |          | -15   | 15   | $\text{mV}$   | 1          |
|                                       |                           | $V_{\text{Diff}} = 3.3\text{V}$ ,<br>$I_{\text{L}} = 10\text{mA}$ to 1.5A   |          | -15   | 15   | $\text{mV}$   | 2, 3       |
|                                       |                           | $V_{\text{Diff}} = 40\text{V}$ ,<br>$I_{\text{L}} = 10\text{mA}$ to 300mA   |          | -15   | 15   | $\text{mV}$   | 1          |
|                                       |                           | $V_{\text{Diff}} = 40\text{V}$ ,<br>$I_{\text{L}} = 10\text{mA}$ to 195mA   |          | -15   | 15   | $\text{mV}$   | 2, 3       |
| $\Delta I_{\text{Adj}} / \text{Load}$ | Adjustment Current Change | $V_{\text{Diff}} = 3\text{V}$ ,<br>$I_{\text{L}} = 10\text{mA}$ to 1.5A   |          | -5.0  | 5.0  | $\mu\text{A}$ | 1          |
|                                       |                           | $V_{\text{Diff}} = 3.3\text{V}$ ,<br>$I_{\text{L}} = 10\text{mA}$ to 1.5A   |          | -5.0  | 5.0  | $\mu\text{A}$ | 2, 3       |
|                                       |                           | $V_{\text{Diff}} = 40\text{V}$ ,<br>$I_{\text{L}} = 10\text{mA}$ to 300mA   |          | -5.0  | 5.0  | $\mu\text{A}$ | 1          |
|                                       |                           | $V_{\text{Diff}} = 40\text{V}$ ,<br>$I_{\text{L}} = 10\text{mA}$ to 195mA   |          | -5.0  | 5.0  | $\mu\text{A}$ | 2, 3       |
| $\Delta I_{\text{Adj}} / \text{Line}$ | Adjustment Current Change | $3\text{V} \leq V_{\text{Diff}} \leq 40\text{V}$  |          | -5.0  | 5.0  | $\mu\text{A}$ | 1          |
|                                       |                           | $3.3\text{V} \leq V_{\text{Diff}} \leq 40\text{V}$  |          | -5.0  | 5.0  | $\mu\text{A}$ | 2, 3       |
| $I_{\text{OS}}$                       | Short Circuit Current     | $V_{\text{Diff}} = 10\text{V}$  |          | 1.6   | 3.4  | $\text{A}$    | 1          |
| $\theta_{\text{R}}$                   | Thermal Regulation        | $T_{\text{A}} = 25^{\circ}\text{C}$ , $t = 20\text{mS}$ ,<br>$V_{\text{Diff}} = 40\text{V}$ , $I_{\text{L}} = 300\text{mA}$ |          | -10.5 | 10.5 | $\text{mV}$   | 1          |
| $I_{\text{CL}}$                       | Current Limit             | $V_{\text{Diff}} \leq 15\text{V}$   | (Note 6) | 1.5   |      | $\text{A}$    | 1, 2, 3    |
|                                       |                           | $V_{\text{Diff}} = 40\text{V}$  | (Note 6) | 0.3   |      | $\text{A}$    | 1          |

### AC Parameters

| Symbol | Parameter        | Conditions  | Notes    | Min | Max | Unit        | Subgroups |
|--------|------------------|---|----------|-----|-----|-------------|-----------|
| RR     | Ripple Rejection | $V_I = +6.25\text{V}$ , $V_{\text{O}} = V_{\text{Ref}}$ ,<br>$f = 120\text{Hz}$ , $e_1 = 1V_{\text{RMS}}$ ,<br>$I_{\text{L}} = 0.5\text{A}$ | (Note 7) | 66  |     | $\text{dB}$ | 4, 5, 6   |

## LM117E Electrical Characteristics

### DC Parameters

The following conditions apply, unless otherwise specified.

DC:  $V_{\text{Diff}} = (V_I - V_O)$ ,  $I_L = 8\text{mA}$ ,  $P_D \leq 1.5\text{W}$

| Symbol                                | Parameter                 | Conditions  | Notes    | Min   | Max  | Unit          | Sub groups |
|---------------------------------------|---------------------------|---|----------|-------|------|---------------|------------|
| $I_{\text{Adj}}$                      | Adjustment Pin Current    | $V_{\text{Diff}} = 3\text{V}$   |          |       | 100  | $\mu\text{A}$ | 1          |
|                                       |                           | $V_{\text{Diff}} = 3.3\text{V}$   |          |       | 100  | $\mu\text{A}$ | 2, 3       |
|                                       |                           | $V_{\text{Diff}} = 40\text{V}$  |          |       | 100  | $\mu\text{A}$ | 1, 2, 3    |
| $I_{\text{O}}$                        | Minimum Load Current      | $V_{\text{Diff}} = 3\text{V}$ , $V_{\text{O}} = 1.7\text{V}$  |          |       | 5.0  | $\text{mA}$   | 1          |
|                                       |                           | $V_{\text{Diff}} = 3.3\text{V}$ , $V_{\text{O}} = 1.7\text{V}$  |          |       | 5.0  | $\text{mA}$   | 2, 3       |
|                                       |                           | $V_{\text{Diff}} = 40\text{V}$ , $V_{\text{O}} = 1.7\text{V}$   |          |       | 5.0  | $\text{mA}$   | 1, 2, 3    |
| $V_{\text{Ref}}$                      | Reference Voltage         | $V_{\text{Diff}} = 3\text{V}$   |          | 1.2   | 1.3  | $\text{V}$    | 1          |
|                                       |                           | $V_{\text{Diff}} = 3.3\text{V}$   |          | 1.2   | 1.3  | $\text{V}$    | 2, 3       |
|                                       |                           | $V_{\text{Diff}} = 40\text{V}$  |          | 1.2   | 1.3  | $\text{V}$    | 1, 2, 3    |
| $V_{\text{RLine}}$                    | Line Regulation           | $3\text{V} \leq V_{\text{Diff}} \leq 40\text{V}$ ,<br>$V_{\text{O}} = 1.2\text{V}$                              |          | -8.9  | 8.9  | $\text{mV}$   | 1          |
|                                       |                           | $3.3\text{V} \leq V_{\text{Diff}} \leq 40\text{V}$ ,<br>$V_{\text{O}} = 1.2\text{V}$                            |          | -22.2 | 22.2 | $\text{mV}$   | 2, 3       |
|                                       |                           |   |          |       |      |               |            |
| $V_{\text{RLoad}}$                    | Load Regulation           | $V_{\text{Diff}} = 3\text{V}$ ,<br>$I_L = 10\text{mA}$ to $100\text{mA}$  |          | -15   | 15   | $\text{mV}$   | 1          |
|                                       |                           | $V_{\text{Diff}} = 3.3\text{V}$ ,<br>$I_L = 10\text{mA}$ to $100\text{mA}$                                      |          | -15   | 15   | $\text{mV}$   | 2, 3       |
|                                       |                           | $V_{\text{Diff}} = 40\text{V}$ ,<br>$I_L = 10\text{mA}$ to $100\text{mA}$                                       |          | -15   | 15   | $\text{mV}$   | 1,2        |
|                                       |                           | $V_{\text{Diff}} = 3\text{V}$ ,<br>$I_L = 10\text{mA}$ to $500\text{mA}$  |          | -25   | 25   | $\text{mV}$   | 3          |
|                                       |                           | $V_{\text{Diff}} = 3.3\text{V}$ ,<br>$I_L = 10\text{mA}$ to $500\text{mA}$                                      |          | -15   | 15   | $\text{mV}$   | 1          |
| $\Delta I_{\text{Adj}} / \text{Load}$ | Adjustment Current Change | $V_{\text{Diff}} = 3\text{V}$ ,<br>$I_L = 10\text{mA}$ to $500\text{mA}$  |          | -5.0  | 5.0  | $\mu\text{A}$ | 1          |
|                                       |                           | $V_{\text{Diff}} = 3.3\text{V}$ ,<br>$I_L = 10\text{mA}$ to $500\text{mA}$                                      |          | -5.0  | 5.0  | $\mu\text{A}$ | 2, 3       |
|                                       |                           | $V_{\text{Diff}} = 40\text{V}$ ,<br>$I_L = 10\text{mA}$ to $100\text{mA}$                                       |          | -5.0  | 5.0  | $\mu\text{A}$ | 1, 2, 3    |
| $\Delta I_{\text{Adj}} / \text{Line}$ | Adjustment Current Change | $3\text{V} \leq V_{\text{Diff}} \leq 40\text{V}$  |          | -5.0  | 5.0  | $\mu\text{A}$ | 1          |
|                                       |                           | $3.3\text{V} \leq V_{\text{Diff}} \leq 40\text{V}$  |          | -5.0  | 5.0  | $\mu\text{A}$ | 2, 3       |
| $I_{\text{OS}}$                       | Short Circuit Current     | $V_{\text{Diff}} = 10\text{V}$  |          | 0.45  | 1.6  | $\text{A}$    | 1          |
| $\theta_{\text{R}}$                   | Thermal Regulation        | $T_{\text{A}} = 25^\circ\text{C}$ , $t = 20\text{mS}$ ,<br>$V_{\text{Diff}} = 40\text{V}$ , $I_L = 75\text{mA}$ |          | -6.0  | 6.0  | $\text{mV}$   | 1          |
| $I_{\text{CL}}$                       | Current Limit             | $V_{\text{Diff}} \leq 15\text{V}$   | (Note 6) | 0.5   |      | $\text{A}$    | 1, 2, 3    |
|                                       |                           | $V_{\text{Diff}} = 40\text{V}$  | (Note 6) | 0.15  |      | $\text{A}$    | 1          |

### AC Parameters

| Symbol | Parameter        | Conditions  | Notes    | Min | Max | Unit        | Subgroups |
|--------|------------------|---|----------|-----|-----|-------------|-----------|
| RR     | Ripple Rejection | $V_I = +6.25\text{V}$ , $V_{\text{O}} = V_{\text{Ref}}$ ,<br>$f = 120\text{Hz}$ , $e_1 = 1\text{V}_{\text{RMS}}$ ,<br>$I_L = 100\text{mA}$ , $C_{\text{Adj}} = 10\mu\text{f}$ | (Note 7) | 66  |     | $\text{dB}$ | 4, 5, 6   |

## LM117H & WG RH Electrical Characteristics

### DC Parameters (Notes 11, 12)

| Symbol                         | Parameter                    | Conditions   | Notes   | Min  | Max   | Unit    | Subgroups |
|--------------------------------|------------------------------|--|---|------|-------|---------|-----------|
| $V_O$                          | Output Voltage               | $V_I = 4.25V, I_L = -5mA$  |   | 1.2  | 1.3   | V       | 1, 2, 3   |
|                                |                              | $V_I = 4.25V, I_L = -500mA$                                      |   | 1.2  | 1.3   | V       | 1, 2, 3   |
|                                |                              | $V_I = 41.25V, I_L = -5mA$                                       |   | 1.2  | 1.3   | V       | 1, 2, 3   |
|                                |                              | $V_I = 41.25V, I_L = -50mA$                                      |   | 1.2  | 1.3   | V       | 1, 2, 3   |
| $V_{RLine}$                    | Line Regulation              | $4.25V \leq V_I \leq 41.25V,$<br>$I_L = -5mA$                    |   | -9.0 | 9.0   | mV      | 1         |
|                                |                              |  |   | -23  | 23    | mV      | 2,3       |
| $V_{RLoad}$                    | Load Regulation              | $V_I = 6.25V,$<br>$-500mA \leq I_L \leq -5mA$                    |   | -12  | 12    | mV      | 1, 2, 3   |
|                                |                              |  | $V_I = 41.25V,$<br>$-50mA \leq I_L \leq -5mA$ |      | -12   | 12      | mV        |
| $V_{RTh}$                      | Thermal Regulation           | $V_I = 14.6V, I_L = -500mA$                                      |   | -12  | 12    | mV      | 1         |
| $I_{Adj}$                      | Adjust Pin Current           | $V_I = 4.25V, I_L = -5mA$  |   | -100 | -15   | $\mu A$ | 1, 2, 3   |
|                                |                              | $V_I = 41.25V, I_L = -5mA$                                       |   | -100 | -15   | $\mu A$ | 1, 2, 3   |
| $\Delta I_{Adj} / \text{Line}$ | Adjust Pin Current Change    | $4.25V \leq V_I \leq 41.25V,$<br>$I_L = -5mA$                    |   | -5.0 | 5.0   | $\mu A$ | 1, 2, 3   |
| $\Delta I_{Adj} / \text{Load}$ | Adjust Pin Current Change    | $V_I = 6.25V,$<br>$-500mA \leq I_L \leq -5mA$                    |   | -5.0 | 5.0   | $\mu A$ | 1, 2, 3   |
| $I_Q$                          | Minimum Load Current         | $V_I = 4.25V,$<br>Forced $V_O = 1.4V$                            |   | -3.0 | -0.5  | mA      | 1, 2, 3   |
|                                |                              | $V_I = 14.25V,$<br>Forced $V_O = 1.4V$                           |   | -3.0 | -0.5  | mA      | 1, 2, 3   |
|                                |                              | $V_I = 41.25V,$<br>Forced $V_O = 1.4V$                           |   | -5.0 | -1.0  | mA      | 1, 2, 3   |
| $I_{OS}$                       | Output Short Circuit Current | $V_I = 4.25V$  |   | -1.8 | -0.5  | A       | 1, 2, 3   |
|                                |                              | $V_I = 40V$  |   | -0.5 | -0.05 | A       | 1, 2, 3   |
| $V_O$ (Recov)                  | Output Voltage Recovery      | $V_I = 4.25V, R_L = 2.5\Omega,$<br>$C_L = 20\mu F$               |   | 1.2  | 1.3   | V       | 1, 2, 3   |
|                                |                              | $V_I = 40V, R_L = 250\Omega$                                     |   | 1.2  | 1.3   | V       | 1, 2, 3   |
| $V_O$                          | Output Voltage               | $V_I = 6.25V, I_L = -5mA$  | (Note 8)                                      | 1.2  | 1.3   | V       | 2         |
| $V_{Start}$                    | Voltage Start-Up             | $V_I = 4.25V, R_L = 2.5\Omega,$<br>$C_L = 20\mu F, I_L = -500mA$ |   | 1.2  | 1.3   | V       | 1, 2, 3   |

### AC Parameters (Notes 11, 12)

| Symbol                    | Parameter               | Conditions   | Notes | Min | Max | Unit          | Sub groups |
|---------------------------|-------------------------|--|-------|-----|-----|---------------|------------|
| $V_{NO}$                  | Output Noise Voltage    | $V_I = 6.25V, I_L = -50mA$                                       |       |     | 120 | $\mu V_{RMS}$ | 7          |
| $\Delta V_O / \Delta V_I$ | Line Transient Response | $V_I = 6.25V, \Delta V_I = 3V,$<br>$I_L = -10mA$                 |       |     | 6.0 | mV/V          | 7          |
| $\Delta V_O / \Delta I_L$ | Load Transient Response | $V_I = 6.25V, \Delta I_L = -200mA,$<br>$I_L = -50mA$             |       |     | 0.6 | mV/mA         | 7          |
| $\Delta V_I / \Delta V_O$ | Ripple Rejection        | $V_I = 6.25V, I_L = -125mA,$<br>$E_I = 1V_{RMS}$ at $f = 2400Hz$ |       | 65  |     | dB            | 4          |

## LM117H & WG RH Electrical Characteristics (Continued)

### DC Drift Parameters

The following conditions apply, unless otherwise specified.

Deltas performed on QMLV devices at Group B, Subgroup 5, only.

| Symbol      | Parameter          | Conditions                                    | Notes | Min   | Max  | Unit    | Subgroups |
|-------------|--------------------|---|-------|-------|------|---------|-----------|
| $V_O$       | Output Voltage     | $V_I = 4.25V, I_L = -5mA$                     |       | -0.01 | 0.01 | V       | 1         |
|             |                    | $V_I = 4.25V, I_L = -500mA$                   |       | -0.01 | 0.01 | V       | 1         |
|             |                    | $V_I = 41.25V, I_L = -5mA$                    |       | -0.01 | 0.01 | V       | 1         |
|             |                    | $V_I = 41.25V, I_L = -50mA$                   |       | -0.01 | 0.01 | V       | 1         |
| $V_{RLine}$ | Line Regulation    | $4.25V \leq V_I \leq 41.25V,$<br>$I_L = -5mA$ |       | -4.0  | 4.0  | mV      | 1         |
| $I_{Adj}$   | Adjust Pin Current | $V_I = 4.25V, I_L = -5mA$                     |       | -10   | 10   | $\mu A$ | 1         |
|             |                    | $V_I = 41.25V, I_L = -5mA$                    |       | -10   | 10   | $\mu A$ | 1         |

### AC/DC Post Radiation Limits @ +25°C (Notes 11, 12)

| Symbol                    | Parameter               | Conditions  | Notes | Min  | Max   | Unit | Subgroups |
|---------------------------|-------------------------|---|-------|------|-------|------|-----------|
| $V_O$                     | Output Voltage          | $V_I = 4.25V, I_L = -5mA$                                       |       | 1.2  | 1.350 | V    | 1         |
|                           |                         | $V_I = 4.25V, I_L = -500mA$                                     |       | 1.2  | 1.350 | V    | 1         |
|                           |                         | $V_I = 41.25V, I_L = -5mA$                                      |       | 1.2  | 1.350 | V    | 1         |
|                           |                         | $V_I = 41.25V, I_L = -50mA$                                     |       | 1.2  | 1.350 | V    | 1         |
| $V_{RLine}$               | Line Regulation         | $4.25V \leq V_I \leq 41.25V,$<br>$I_L = -5mA$                   |       | -25  | 25    | mV   | 1         |
| $\Delta V_I / \Delta V_O$ | Ripple Rejection        | $V_I = 6.25V, I_L = -125mA$<br>$E_I = 1V_{RMS}$ at $f = 2400Hz$ |       | 60   |       | dB   | 4         |
| $V_O$ (Recov)             | Output Voltage Recovery | $V_I = 4.25V, R_L = 2.5\Omega,$<br>$C_L = 20\mu f$              |       | 1.20 | 1.350 | V    | 1         |
|                           |                         | $V_I = 40V, R_L = 250\Omega$                                    |       | 1.20 | 1.350 | V    | 1         |

## LM117K RH Electrical Characteristics

### DC Parameters (Note 11)

| Symbol                         | Parameter                    | Conditions  | Notes    | Min  | Max   | Unit    | Subgroups |
|--------------------------------|------------------------------|---|----------|------|-------|---------|-----------|
| $V_O$                          | Output Voltage               | $V_I = 4.25V, I_L = -5mA$   |          | 1.2  | 1.3   | V       | 1, 2, 3   |
|                                |                              | $V_I = 4.25V, I_L = -1.5A$  |          | 1.2  | 1.3   | V       | 1, 2, 3   |
|                                |                              | $V_I = 41.25V, I_L = -5mA$  |          | 1.2  | 1.3   | V       | 1, 2, 3   |
|                                |                              | $V_I = 41.25V, I_L = -200mA$                                      |          | 1.2  | 1.3   | V       | 1, 2, 3   |
| $V_{RLine}$                    | Line Regulation              | $4.25V \leq V_I \leq 41.25V,$<br>$I_L = -5mA$                     |          | -9.0 | 9.0   | mV      | 1         |
|                                |                              |   |          | -23  | 23    | mV      | 2,3       |
| $V_{RLoad}$                    | Load Regulation              | $V_I = 6.25V,$<br>$-1.5A \leq I_L \leq -5mA$                      |          | -3.5 | 3.5   | mV      | 1         |
|                                |                              |   |          | -12  | 12    | mV      | 2, 3      |
|                                |                              | $V_I = 41.25V,$<br>$-200mA \leq I_L \leq -5mA$                    |          | -3.5 | 3.5   | mV      | 1         |
|                                |                              |   |          | -12  | 12    | mV      | 2, 3      |
| $V_{RTh}$                      | Thermal Regulation           | $V_I = 14.6V, I_L = -1.5A$  |          | -12  | 12    | mV      | 1         |
| $I_{Adj}$                      | Adjust Pin Current           | $V_I = 4.25V, I_L = -5mA$   |          | -100 | -15   | $\mu A$ | 1, 2, 3   |
|                                |                              | $V_I = 41.25V, I_L = -5mA$  |          | -100 | -15   | $\mu A$ | 1, 2, 3   |
| $\Delta I_{Adj} / \text{Line}$ | Adjust Pin Current Change    | $4.25V \leq V_I \leq 41.25V,$<br>$I_L = -5mA$                     |          | -5.0 | 5.0   | $\mu A$ | 1, 2, 3   |
| $\Delta I_{Adj} / \text{Load}$ | Adjust Pin Current Change    | $V_I = 6.25V,$<br>$-1.5A \leq I_L \leq -5mA$                      |          | -5.0 | 5.0   | $\mu A$ | 1, 2, 3   |
| $I_Q$                          | Minimum Load Current         | $V_I = 4.25V,$<br>Forced $V_O = 1.4V$                             |          | -3.0 | -0.2  | mA      | 1, 2, 3   |
|                                |                              | $V_I = 14.25V,$<br>Forced $V_O = 1.4V$                            |          | -3.0 | -0.2  | mA      | 1, 2, 3   |
|                                |                              | $V_I = 41.25V,$<br>Forced $V_O = 1.4V$                            |          | -5.0 | -0.2  | mA      | 1, 2, 3   |
| $I_{OS}$                       | Output Short Circuit Current | $V_I = 4.25V$   |          | -3.5 | -1.5  | A       | 1, 2, 3   |
|                                |                              | $V_I = 40V$   |          | -1.0 | -0.18 | A       | 1, 2, 3   |
| $V_O$ (Recov)                  | Output Voltage Recovery      | $V_I = 4.25V, R_L = 0.833\Omega,$<br>$C_L = 20\mu F$              |          | 1.2  | 1.3   | V       | 1, 2, 3   |
|                                |                              | $V_I = 40V, R_L = 250\Omega$                                      |          | 1.2  | 1.3   | V       | 1, 2, 3   |
| $V_O$                          | Output Voltage               | $V_I = 6.25V, I_L = -5mA$   | (Note 8) | 1.2  | 1.3   | V       | 2         |
| $V_{Start}$                    | Voltage Start-Up             | $V_I = 4.25V, R_L = 0.833\Omega,$<br>$C_L = 20\mu F, I_L = -1.5A$ |          | 1.2  | 1.3   | V       | 1, 2, 3   |

### AC Parameters (Note 11)

| Symbol                    | Parameter               | Conditions   | Notes     | Min | Max | Unit          | Sub groups |
|---------------------------|-------------------------|--|-----------|-----|-----|---------------|------------|
| $V_{NO}$                  | Output Noise Voltage    | $V_I = 6.25V, I_L = -100mA$                                      |           |     | 120 | $\mu V_{RMS}$ | 7          |
| $\Delta V_O / \Delta V_I$ | Line Transient Response | $V_I = 6.25V, \Delta V_I = 3V,$<br>$I_L = -10mA$                 | (Note 9)  |     | 18  | mV            | 7          |
| $\Delta V_O / \Delta I_L$ | Load Transient Response | $V_I = 6.25V, \Delta I_L = -400mA,$<br>$I_L = -100mA$            | (Note 10) |     | 120 | mV            | 7          |
| $\Delta V_I / \Delta V_O$ | Ripple Rejection        | $V_I = 6.25V, I_L = -500mA,$<br>$E_I = 1V_{RMS}$ at $f = 2400Hz$ |           | 65  |     | dB            | 4          |

## LM117K RH Electrical Characteristics (Continued)

### DC Drift Parameters

The following conditions apply, unless otherwise specified.

Deltas performed on QMLV devices at Group B, Subgroup 5, only.

| Symbol             | Parameter          | Conditions  | Notes | Min   | Max  | Unit | Subgroups |
|--------------------|--------------------|---|-------|-------|------|------|-----------|
| V <sub>O</sub>     | Output Voltage     | V <sub>I</sub> = 4.25V, I <sub>L</sub> = -5mA             |       | -0.01 | 0.01 | V    | 1         |
|                    |                    | V <sub>I</sub> = 4.25V, I <sub>L</sub> = -1.5A            |       | -0.01 | 0.01 | V    | 1         |
|                    |                    | V <sub>I</sub> = 41.25V, I <sub>L</sub> = -5mA            |       | -0.01 | 0.01 | V    | 1         |
|                    |                    | V <sub>I</sub> = 41.25V, I <sub>L</sub> = -200mA          |       | -0.01 | 0.01 | V    | 1         |
| V <sub>RLine</sub> | Line Regulation    | 4.25V ≤ V <sub>I</sub> ≤ 41.25V,<br>I <sub>L</sub> = -5mA |       | -4.0  | 4.0  | mV   | 1         |
| I <sub>Adj</sub>   | Adjust Pin Current | V <sub>I</sub> = 4.25V, I <sub>L</sub> = -5mA             |       | -10   | 10   | μA   | 1         |
|                    |                    | V <sub>I</sub> = 41.25V, I <sub>L</sub> = -5mA            |       | -10   | 10   | μA   | 1         |

### AC/DC Post Radiation Limits @ +25°C (Note 11)

| Symbol                            | Parameter               | Conditions  | Notes | Min  | Max   | Unit | Subgroups |
|-----------------------------------|-------------------------|---|-------|------|-------|------|-----------|
| V <sub>O</sub>                    | Output Voltage          | V <sub>I</sub> = 4.25V, I <sub>L</sub> = -5mA   |       | 1.2  | 1.350 | V    | 1         |
|                                   |                         | V <sub>I</sub> = 4.25V, I <sub>L</sub> = -1.5A  |       | 1.2  | 1.350 | V    | 1         |
|                                   |                         | V <sub>I</sub> = 41.25V, I <sub>L</sub> = -5mA  |       | 1.2  | 1.350 | V    | 1         |
|                                   |                         | V <sub>I</sub> = 41.25V, I <sub>L</sub> = -200mA  |       | 1.2  | 1.350 | V    | 1         |
| V <sub>RLine</sub>                | Line Regulation         | 4.25V ≤ V <sub>I</sub> ≤ 41.25V,<br>I <sub>L</sub> = -5mA   |       | -25  | 25    | mV   | 1         |
| V <sub>RLoad</sub>                | Load Regulation         | V <sub>I</sub> = 6.25V,<br>-1.5A ≤ I <sub>L</sub> ≤ -5mA  |       | -7.0 | 7.0   | mV   | 1         |
|                                   |                         | V <sub>I</sub> = 41.25V,<br>-200mA ≤ I <sub>L</sub> ≤ -5mA  |       | -7.0 | 7.0   | mV   | 1         |
| ΔV <sub>I</sub> / ΔV <sub>O</sub> | Ripple Rejection        | V <sub>I</sub> = 6.25V, I <sub>L</sub> = -500mA<br>E <sub>i</sub> = 1V <sub>RMS</sub> at f = 2400Hz |       | 60   |       | dB   | 4         |
| V <sub>O</sub> (Recov)            | Output Voltage Recovery | V <sub>I</sub> = 4.25V, R <sub>L</sub> = 0.833Ω,<br>C <sub>L</sub> = 20μS                           |       | 1.20 | 1.350 | V    | 1         |
|                                   |                         | V <sub>I</sub> = 40V, R <sub>L</sub> = 250Ω   |       | 1.20 | 1.350 | V    | 1         |

**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits. For guaranteed specifications and test conditions, see the Electrical Characteristics. The guaranteed specifications apply only for the test conditions listed. Some performance characteristics may degrade when the device is not operated under the listed test conditions.

**Note 2:** The maximum power dissipation must be derated at elevated temperatures and is dictated by T<sub>Jmax</sub> (maximum junction temperature), θ<sub>JA</sub> (package junction to ambient thermal resistance), and T<sub>A</sub> (ambient temperature). The maximum allowable power dissipation at any temperature is P<sub>Dmax</sub> = (T<sub>Jmax</sub> - T<sub>A</sub>)/θ<sub>JA</sub> or the number given in the Absolute Maximum Ratings, whichever is lower. "Although power dissipation is internally limited, these specifications are applicable for power dissipations of 2W for the TO39, LCC, and ceramic SOIC packages, and 20W for the TO3 package."

**Note 3:** Human body model, 100 pF discharged through a 1.5 kΩ resistor.

**Note 4:** For the Ceramic SOIC device to function properly, the "Output" and "Output/Sense" pins must be connected on the users printed circuit board.

**Note 5:** The package material for these devices allows much improved heat transfer over our standard ceramic packages. In order to take full advantage of this improved heat transfer, heat sinking must be provided between the package base (directly beneath the die), and either metal traces on, or thermal vias through, the printed circuit board. Without this additional heat sinking, device power dissipation must be calculated using θ<sub>JA</sub>, rather than θ<sub>JC</sub>, thermal resistance. It must not be assumed that the device leads will provide substantial heat transfer out the package, since the thermal resistance of the leadframe material is very poor, relative to the material of the package base. The stated θ<sub>JC</sub> thermal resistance is for the package material only, and does not account for the additional thermal resistance between the package base and the printed circuit board. The user must determine the value of the additional thermal resistance and must combine this with the stated value for the package, to calculate the total allowed power dissipation for the device.

**Note 6:** Guaranteed parameter, not tested.

**Note 7:** Tested @ 25°C; guaranteed, but not tested @ 125°C & -55°C

**Note 8:** Tested @ T<sub>A</sub> = 125°C, correlated to T<sub>A</sub> = 150°C


**Note 9:** SMD limit of 6mV/V is equivalent to 18mV

**Note 10:** SMD limit of 0.3mV/V is equivalent to 120mV


**Note 11:** Pre and post irradiation limits are identical to those listed under AC and DC electrical characteristics except as listed in the "Post Radiation Limits" table. These parts may be dose rate sensitive in a space environment and demonstrate enhanced low dose rate effect. Radiation end point limits for the noted parameters are guaranteed only for the conditions as specified in Mil-Std-883, Method 1019.5, Condition A.

**Note 12:** Low dose rate testing has been performed on a wafer-by-wafer basis, per test method 1019 condition D of MIL-STD-883, with no enhanced low dose rate sensitivity (ELDRS) effect.


# Typical Performance Characteristics Output Capacitor = 0 $\mu$ F unless otherwise noted

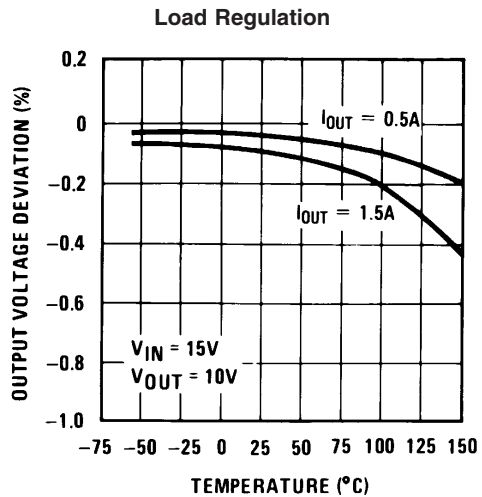


20143637

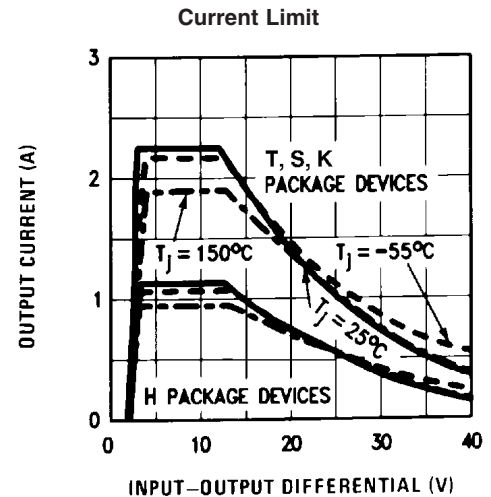


20143638

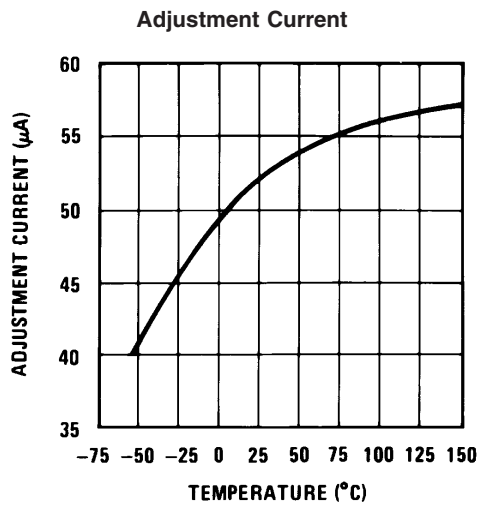


20143639

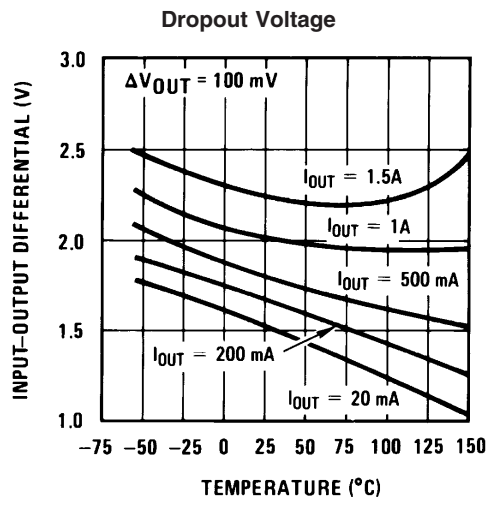

20143640






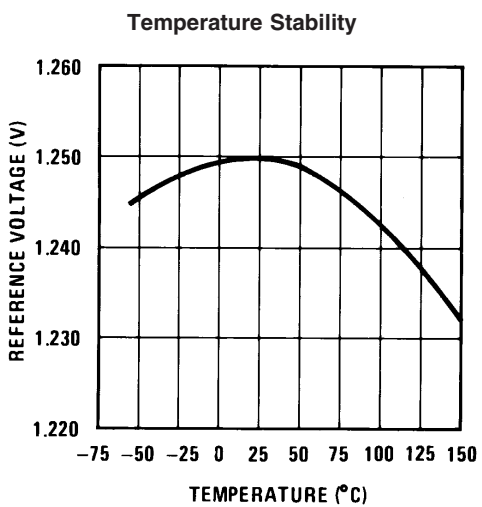


20143641

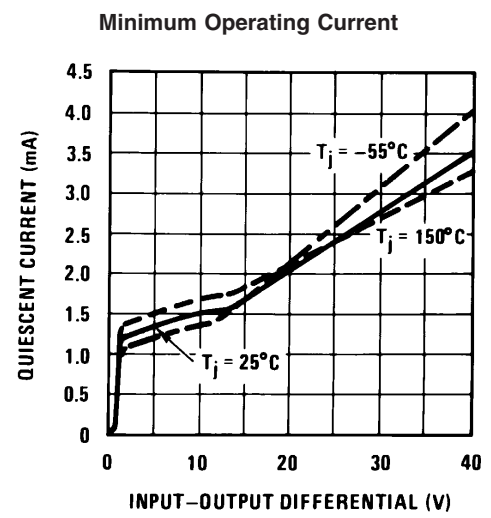

20143642

Typical Performance Characteristics Output Capacitor = 0 $\mu$ F unless otherwise noted (Continued)

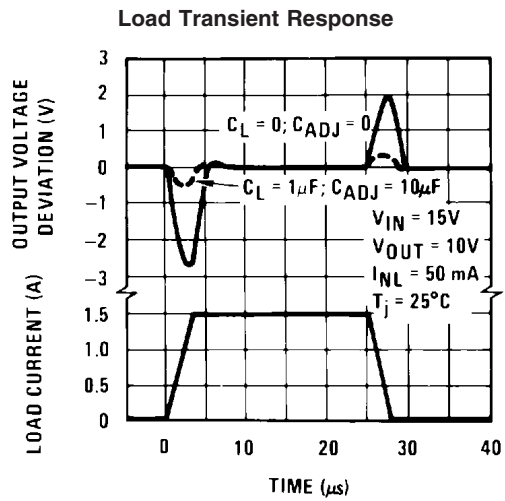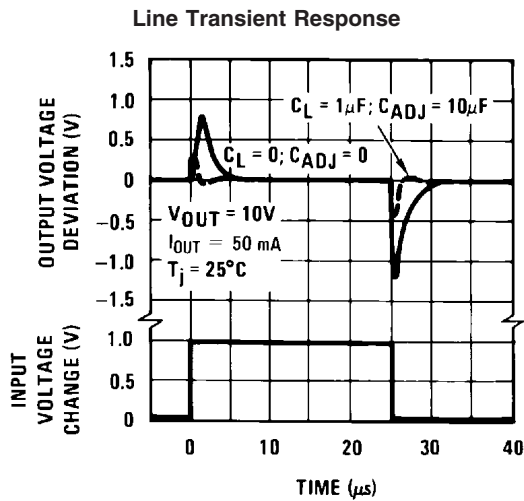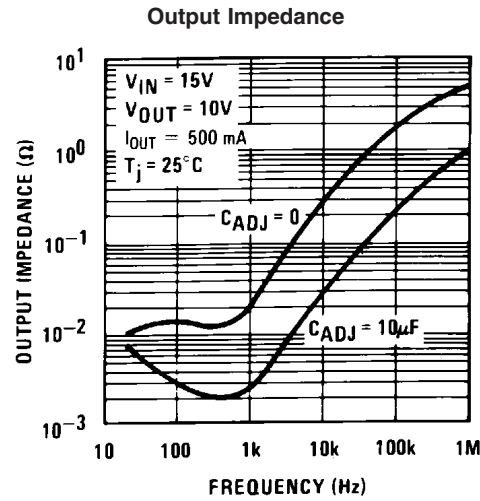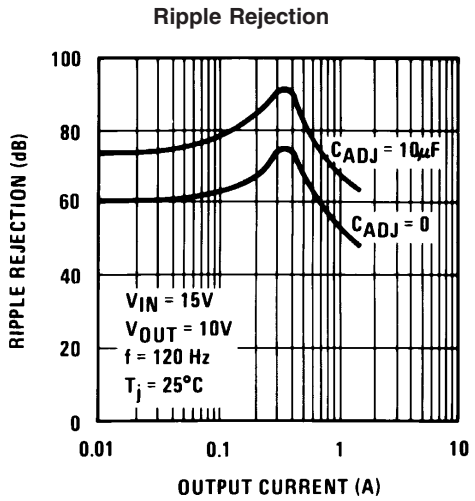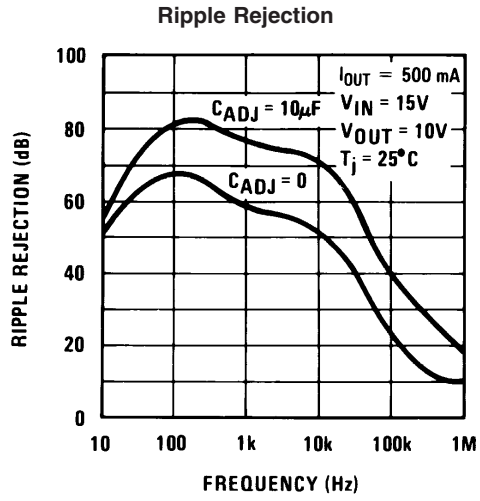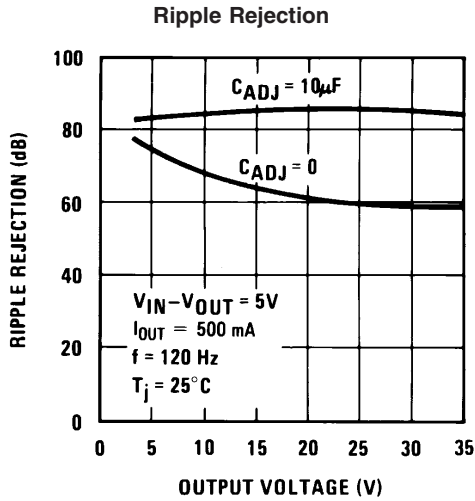

## Application Hints

In operation, the LM117 develops a nominal 1.25V reference voltage,  $V_{REF}$ , between the output and adjustment terminal. The reference voltage is impressed across program resistor R1 and, since the voltage is constant, a constant current  $I_1$  then flows through the output set resistor R2, giving an output voltage of

$$V_{OUT} = V_{REF} \left( 1 + \frac{R_2}{R_1} \right) + I_{ADJ} R_2$$

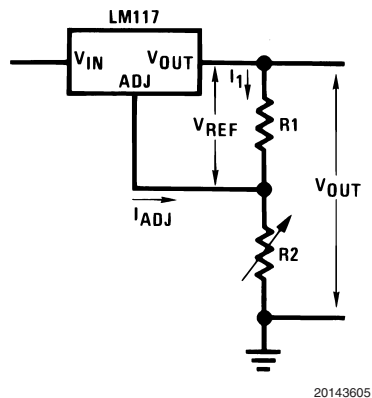


FIGURE 1.

Since the 100 $\mu$ A current from the adjustment terminal represents an error term, the LM117 was designed to minimize  $I_{ADJ}$  and make it very constant with line and load changes. To do this, all quiescent operating current is returned to the output establishing a minimum load current requirement. If there is insufficient load on the output, the output will rise.

### EXTERNAL CAPACITORS

An input bypass capacitor is recommended. A 0.1 $\mu$ F disc or 1 $\mu$ F solid tantalum on the input is suitable input bypassing for almost all applications. The device is more sensitive to the absence of input bypassing when adjustment or output capacitors are used but the above values will eliminate the possibility of problems.

The adjustment terminal can be bypassed to ground on the LM117 to improve ripple rejection. This bypass capacitor prevents ripple from being amplified as the output voltage is increased. With a 10 $\mu$ F bypass capacitor 80dB ripple rejection is obtainable at any output level. Increases over 10 $\mu$ F do not appreciably improve the ripple rejection at frequencies above 120Hz. If the bypass capacitor is used, it is sometimes necessary to include protection diodes to prevent the capacitor from discharging through internal low current paths and damaging the device.

In general, the best type of capacitors to use is solid tantalum. Solid tantalum capacitors have low impedance even at high frequencies. Depending upon capacitor construction, it takes about 25 $\mu$ F in aluminum electrolytic to equal 1 $\mu$ F solid tantalum at high frequencies. Ceramic capacitors are also good at high frequencies; but some types have a large decrease in capacitance at frequencies around 0.5MHz. For this reason, 0.01 $\mu$ F disc may seem to work better than a 0.1 $\mu$ F disc as a bypass.

Although the LM117 is stable with no output capacitors, like any feedback circuit, certain values of external capacitance

can cause excessive ringing. This occurs with values between 500 pF and 5000 pF. A 1 $\mu$ F solid tantalum (or 25 $\mu$ F aluminum electrolytic) on the output swamps this effect and insures stability. Any increase of the load capacitance larger than 10 $\mu$ F will merely improve the loop stability and output impedance.

### LOAD REGULATION

The LM117 is capable of providing extremely good load regulation but a few precautions are needed to obtain maximum performance. The current set resistor connected between the adjustment terminal and the output terminal (usually 240 $\Omega$ ) should be tied directly to the output (case) of the regulator rather than near the load. This eliminates line drops from appearing effectively in series with the reference and degrading regulation. For example, a 15V regulator with 0.05 $\Omega$  resistance between the regulator and load will have a load regulation due to line resistance of 0.05 $\Omega$   $\times$   $I_L$ . If the set resistor is connected near the load the effective line resistance will be 0.05 $\Omega$  (1 +  $R_2/R_1$ ) or in this case, 11.5 times worse.

Figure 2 shows the effect of resistance between the regulator and 240 $\Omega$  set resistor.

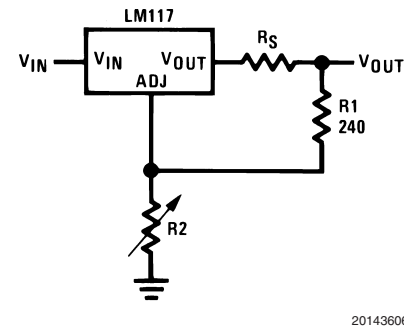


FIGURE 2. Regulator with Line Resistance in Output Lead

With the TO-3 package, it is easy to minimize the resistance from the case to the set resistor, by using two separate leads to the case. However, with the TO-39 package, care should be taken to minimize the wire length of the output lead. The ground of  $R_2$  can be returned near the ground of the load to provide remote ground sensing and improve load regulation.

### PROTECTION DIODES

When external capacitors are used with any IC regulator it is sometimes necessary to add protection diodes to prevent the capacitors from discharging through low current points into the regulator. Most 10 $\mu$ F capacitors have low enough internal series resistance to deliver 20A spikes when shorted. Although the surge is short, there is enough energy to damage parts of the IC.

When an output capacitor is connected to a regulator and the input is shorted, the output capacitor will discharge into the output of the regulator. The discharge current depends on the value of the capacitor, the output voltage of the regulator, and the rate of decrease of  $V_{IN}$ . In the LM117, this discharge path is through a large junction that is able to sustain 15A surge with no problem. This is not true of other types of positive regulators. For output capacitors of 25 $\mu$ F or less, there is no need to use diodes.


The bypass capacitor on the adjustment terminal can discharge through a low current junction. Discharge occurs

## Application Hints (Continued)

when *either* the input or output is shorted. Internal to the LM117 is a 50Ω resistor which limits the peak discharge current. No protection is needed for output voltages of 25V or less and 10μF capacitance. *Figure 3* shows an LM117 with protection diodes included for use with outputs greater than 25V and high values of output capacitance.

When a value for  $\theta_{(H-A)}$  is found using the equation shown, *a heatsink must be selected that has a value that is less than or equal to this number.*

$\theta_{(H-A)}$  is specified numerically by the heatsink manufacturer in the catalog, or shown in a curve that plots temperature rise vs power dissipation for the heatsink.

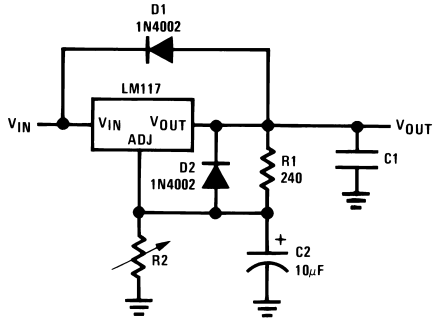

20143607

$$V_{OUT} = 1.25V \left( 1 + \frac{R_2}{R_1} \right) + I_{ADJ}R_2$$


D1 protects against C1

D2 protects against C2

FIGURE 3. Regulator with Protection Diodes

## Typical Applications


### 5V Logic Regulator with Electronic Shutdown\*

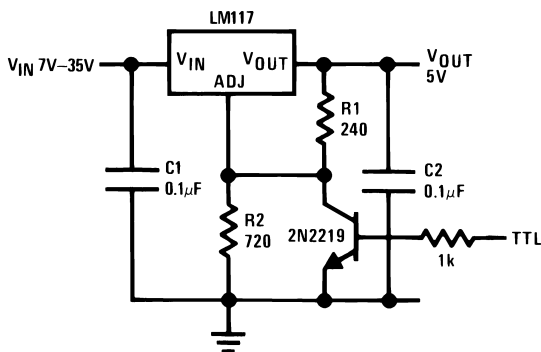

20143603


\*Min. output  $\cong$  1.2V

### Slow Turn-On 15V Regulator

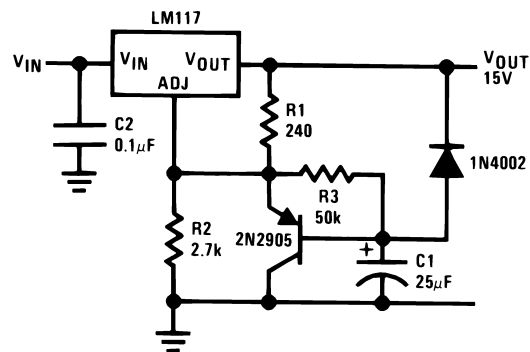

20143609

### Adjustable Regulator with Improved Ripple Rejection

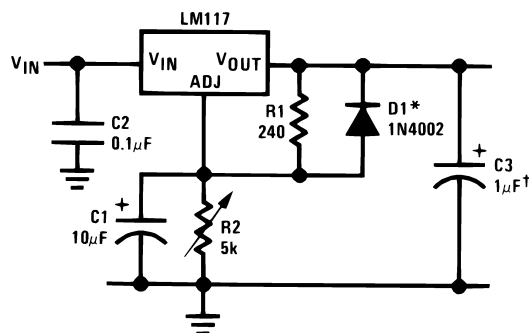


20143610

†Solid tantalum

\*Discharges C1 if output is shorted to ground


## Typical Applications (Continued)

### High Stability 10V Regulator

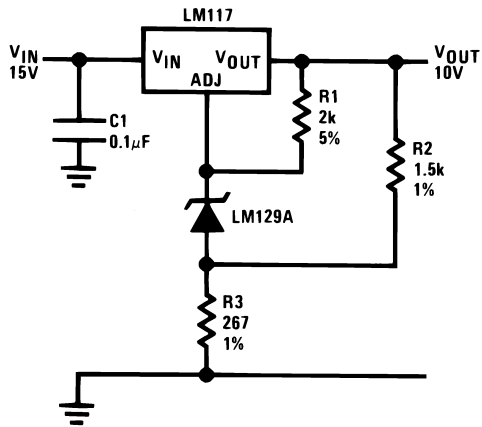

20143611

### High Current Adjustable Regulator

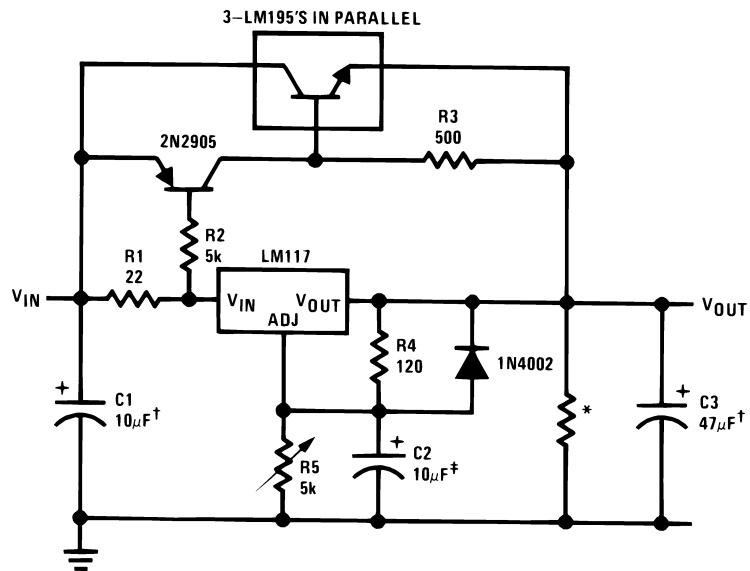


20143612

‡Optional—improves ripple rejection

†Solid tantalum


\*Minimum load current = 30 mA

Typical Applications (Continued)

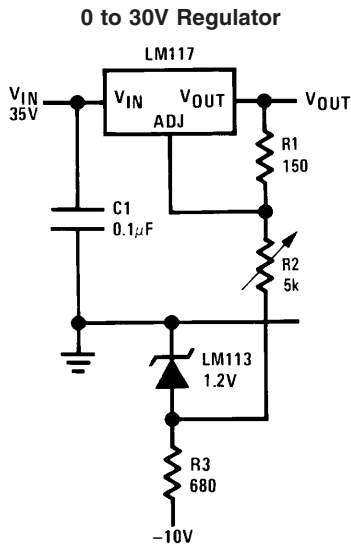


20143613

Full output current not available at high input-output voltages

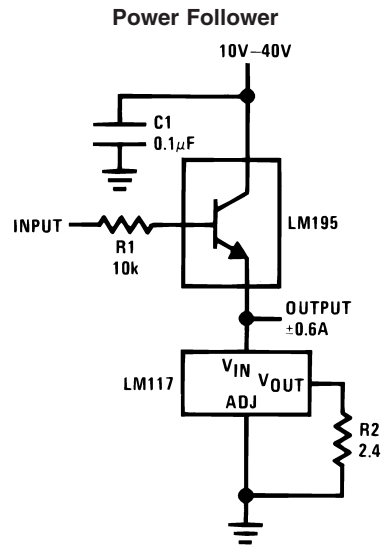

20143614


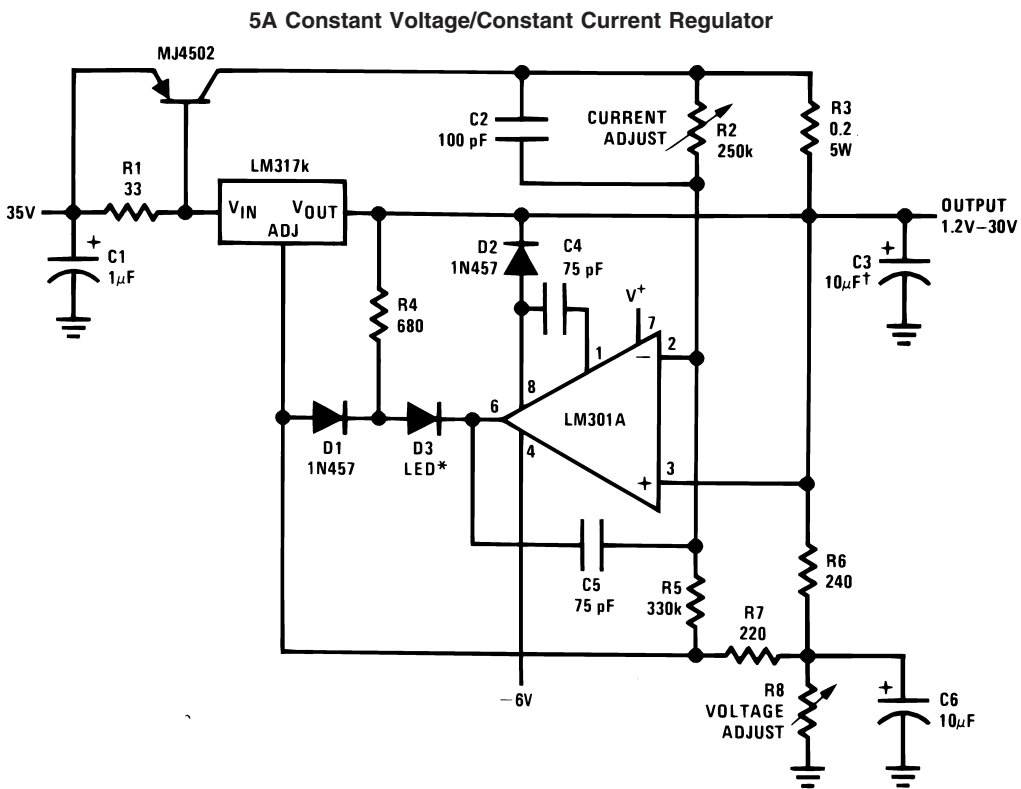


20143615


†Solid tantalum

\*Lights in constant current mode


## Typical Applications (Continued)

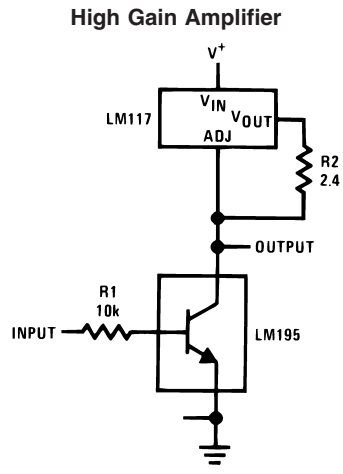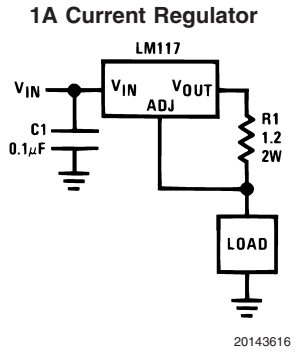

### 1.2V–20V Regulator with Minimum Program Current



\*Minimum load current  $\cong$  4 mA

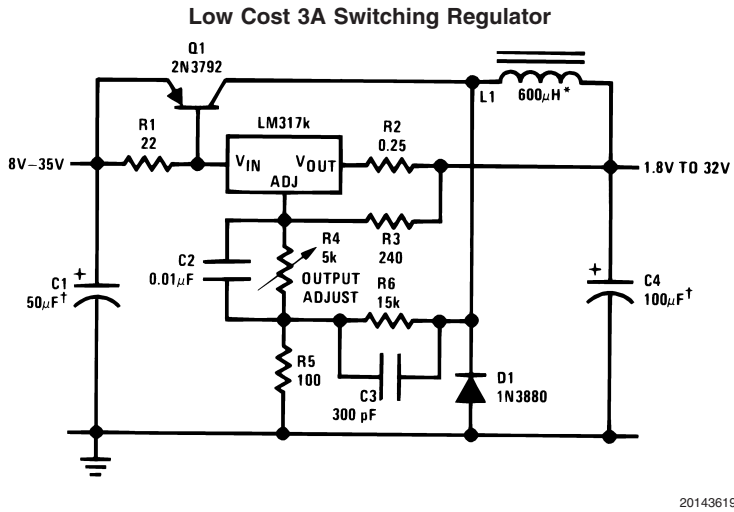


†Solid tantalum

\*Core—Arnold A-254168-2 60 turns

Typical Applications (Continued)

4A Switching Regulator with Overload Protection

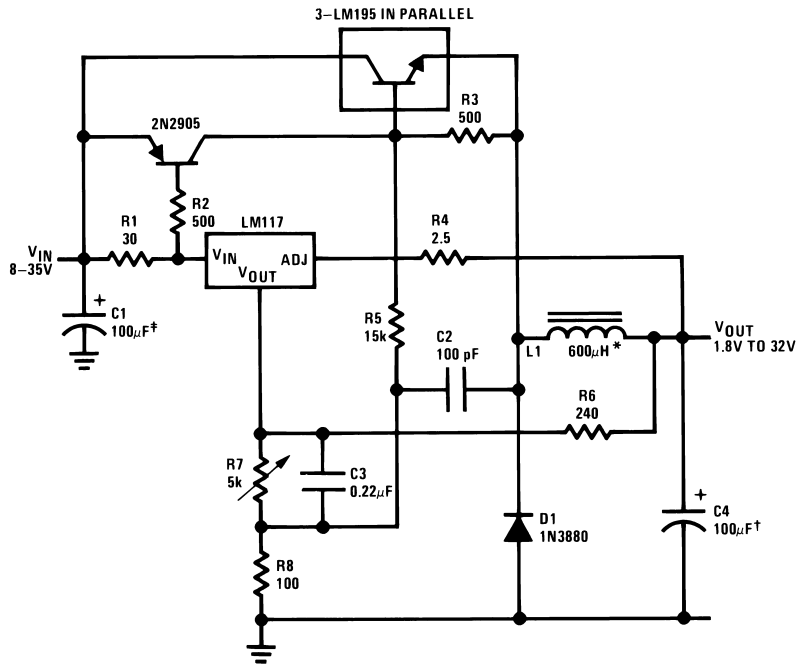


20143620

†Solid tantalum

\*Core—Arnold A-254168-2 60 turns

Precision Current Limiter




$$I_{OUT} = \frac{V_{REF}}{R1}$$

\* $0.8\Omega \leq R1 \leq 120\Omega$

20143621


Tracking Preregulator

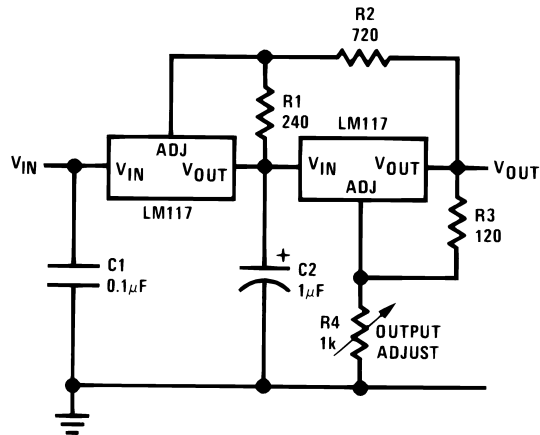

20143622

# Typical Applications (Continued)

## Current Limited Voltage Regulator

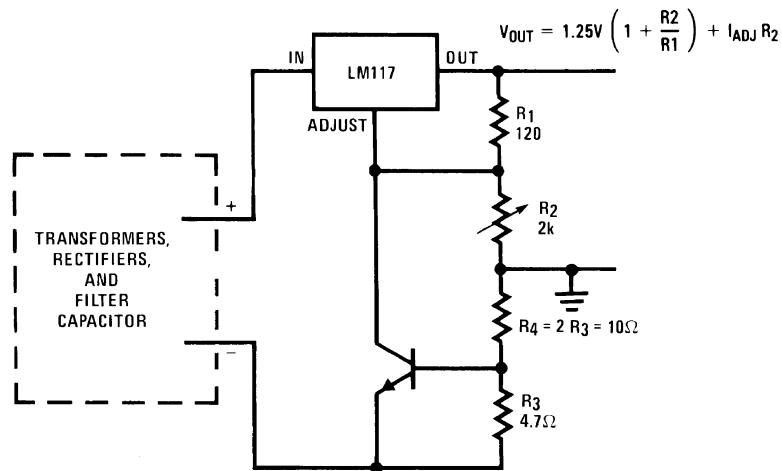


20143623

— Short circuit current is approximately  $\frac{600 \text{ mV}}{R_3}$ , or 120 mA

(Compared to LM117's higher current limit)

— At 50 mA output only ¼ volt of drop occurs in R<sub>3</sub> and R<sub>4</sub>

## Adjusting Multiple On-Card Regulators with Single Control\*

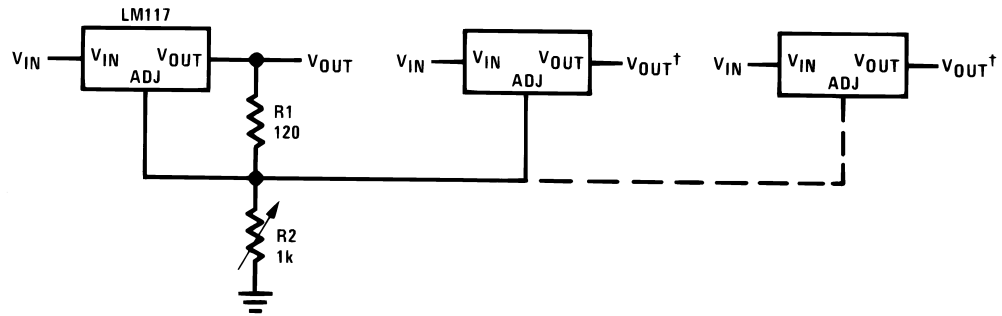


20143624

\*All outputs within ±100 mV

†Minimum load— 10 mA


Typical Applications (Continued)

AC Voltage Regulator

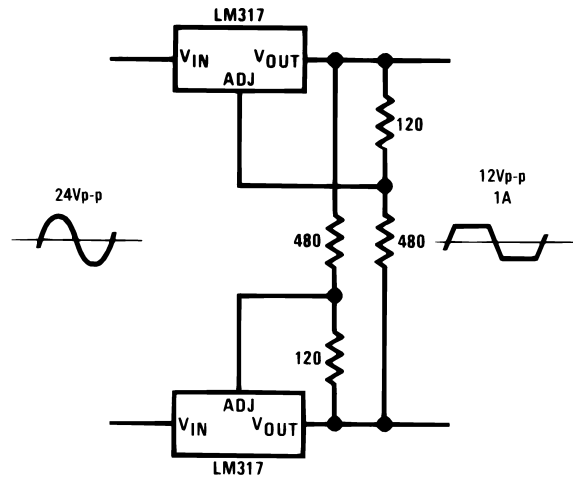

20143625

12V Battery Charger

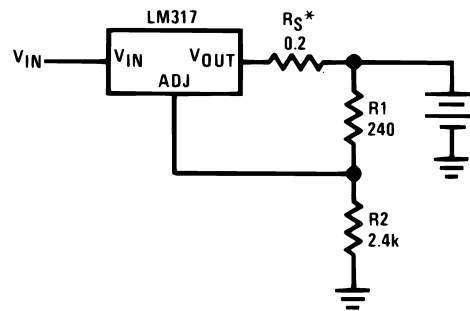


20143626

\*R<sub>S</sub>—sets output impedance of charger:  $Z_{OUT} = R_S \left( 1 + \frac{R_2}{R_1} \right)$


Use of R<sub>S</sub> allows low charging rates with fully charged battery.

50mA Constant Current Battery Charger

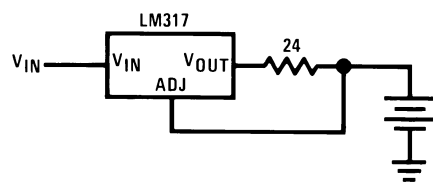


20143627

## Typical Applications (Continued)

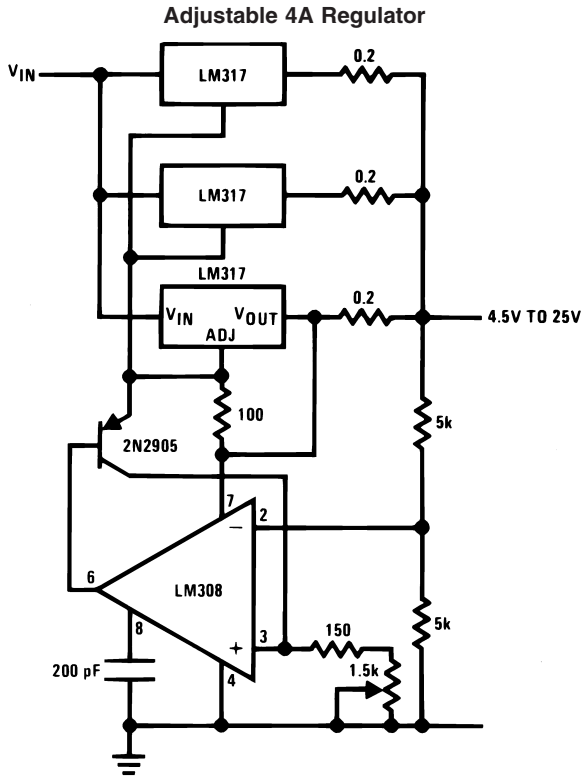

20143628

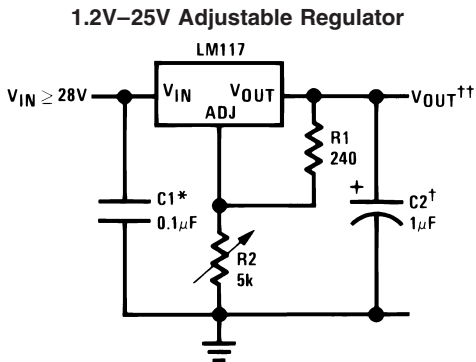

20143601


Full output current not available at high input-output voltages

\*Needed if device is more than 6 inches from filter capacitors.

†Optional—improves transient response. Output capacitors in the range of 1μF to 1000μF of aluminum or tantalum electrolytic are commonly used to provide improved output impedance and rejection of transients.

$$\dagger\dagger V_{OUT} = 1.25V \left( 1 + \frac{R_2}{R_1} \right) + I_{ADJ}(R_2)$$

### Current Limited 6V Charger

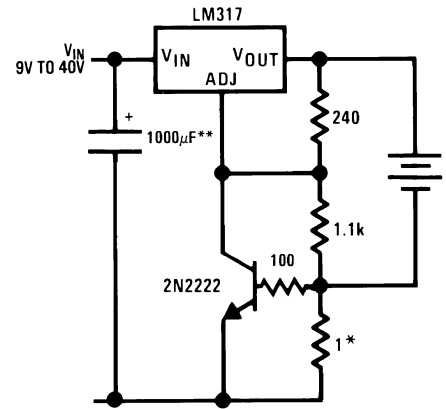


20143629

\*Sets peak current (0.6A for 1Ω)

\*\*The 1000μF is recommended to filter out input transients

### Digitally Selected Outputs

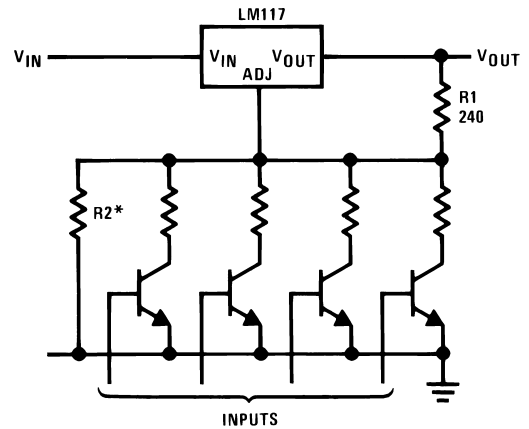


20143602

\*Sets maximum VOUT

## Revision History

| Date Released | Revision | Section   | Originator | Changes   |
|---------------|----------|---|------------|---|
| 03/17/06      | A        | New Release to corporate format   | L.Lytle    | 5 MDS data sheets were consolidated into one corporate data sheet format. Clarified $\Delta I_{Adj}$ / Line versus $\Delta I_{Adj}$ / Load by separating the parameters in all of the tables. MNLM117-K Rev 1C1, MNLM117-X Rev 0A0, MNLM117-E Rev 0B1, MRLM117-X-RH Rev 2A0, MRLM117-K-RH Rev 3A0 will be archived. |
| 06/29/06      | B        | Features, Ordering Information Table, Rad Hard Electrical Section for H and WG packages and Notes | R. Malone  | Deleted NSID LM117WGRQML, no longer available. Added Available with Radiation Guarantee, Low Dose NSID's to table 5962R9951705VXA LM117HRLQMLV, 5962R9951705VZA LM117WGRLQMLV, and reference to Note 11 and 12. Note 12 to Rad Hard Electrical Heading for H and WG packages. Note 12 to Notes. Archive Revision A. |

**Physical Dimensions** inches (millimeters) unless otherwise noted

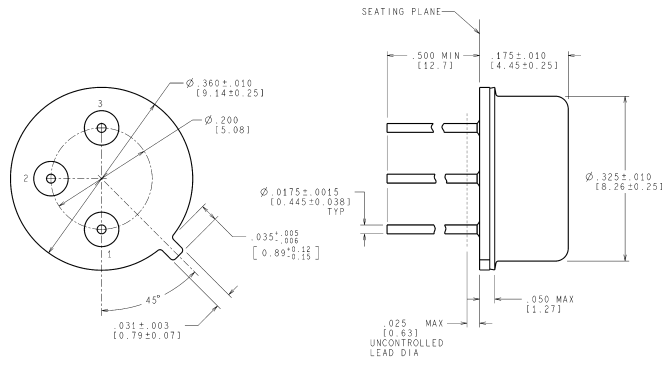


CONTROLLING DIMENSION IS INCH  
VALUES IN [ ] ARE MILLIMETERS

MIL-PRF-38535  
CONFIGURATION CONTROL

H03A (Rev D)

**(TO-39) Metal Can Package  
NS Package Number H03A**

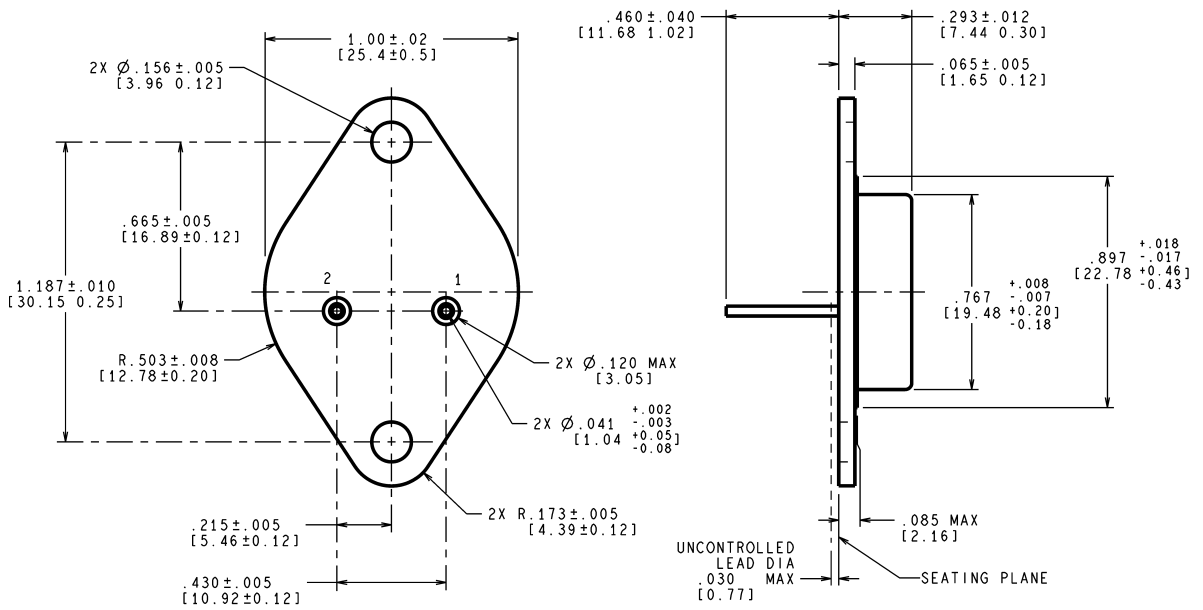


CONTROLLING DIMENSION IS INCH  
VALUES IN [ ] ARE MILLIMETERS

MIL-PRF-38535  
CONFIGURATION CONTROL

K02C (Rev E)

**TO-3 Metal Can Package (K)  
NS Package Number K02C**


**Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)

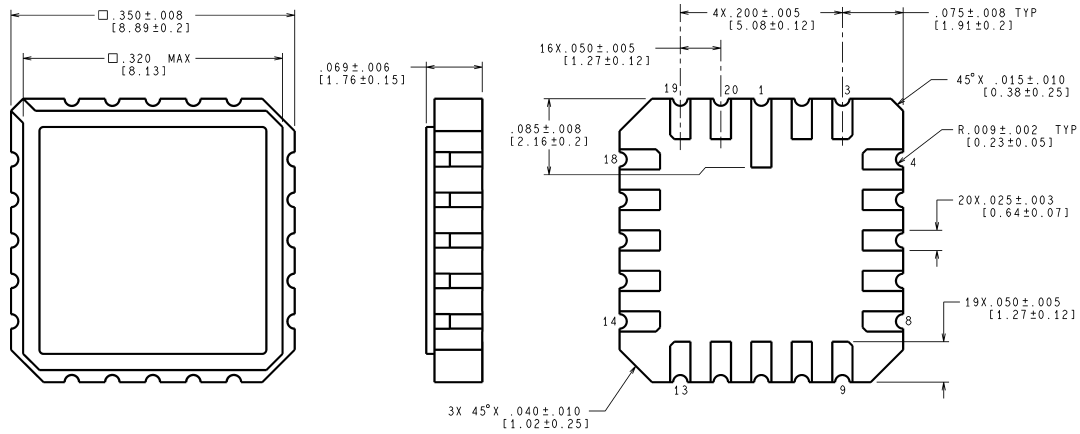

CONTROLLING DIMENSION IS INCH  
VALUES IN [ ] ARE MILLIMETERS

E20A (Rev F)

**Ceramic Leadless Chip Carrier  
NS Package Number E20A**

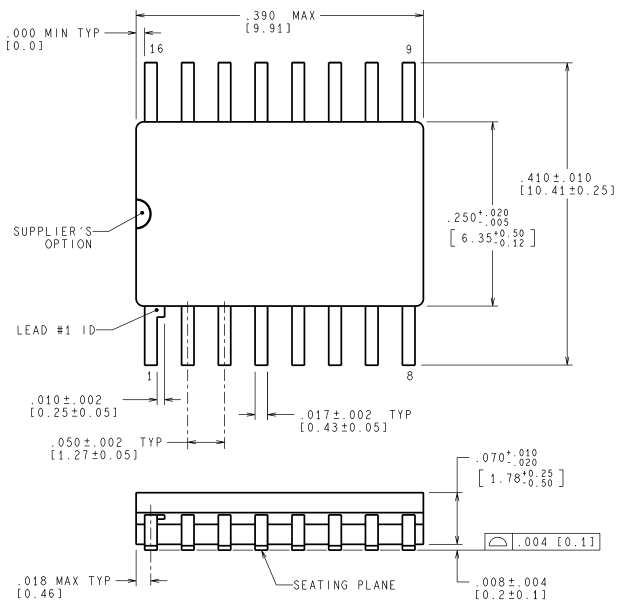

CONTROLLING DIMENSION IS INCH  
VALUES IN [ ] ARE MILLIMETERS

MIL-PRF-38535  
CONFIGURATION CONTROL

WG16A (Rev D)

**Ceramic SOIC  
NS Package Number WG16A**

## Notes

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

For the most current product information visit us at [www.national.com](http://www.national.com).

### LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

### BANNED SUBSTANCE COMPLIANCE

National Semiconductor follows the provisions of the Product Stewardship Guide for Customers (CSP-9-111C2) and Banned Substances and Materials of Interest Specification (CSP-9-111S2) for regulatory environmental compliance. Details may be found at: [www.national.com/quality/green](http://www.national.com/quality/green).

Lead free products are RoHS compliant.



**National Semiconductor**  
Americas Customer  
Support Center  
Email: [new.feedback@nsc.com](mailto:new.feedback@nsc.com)  
Tel: 1-800-272-9959

**National Semiconductor**  
Europe Customer Support Center  
Fax: +49 (0) 180-530 85 86  
Email: [europe.support@nsc.com](mailto:europe.support@nsc.com)  
Deutsch Tel: +49 (0) 69 9508 6208  
English Tel: +44 (0) 870 24 0 2171  
Français Tel: +33 (0) 1 41 91 8790

**National Semiconductor**  
Asia Pacific Customer  
Support Center  
Email: [ap.support@nsc.com](mailto:ap.support@nsc.com)

**National Semiconductor**  
Japan Customer Support Center  
Fax: 81-3-5639-7507  
Email: [jpn.feedback@nsc.com](mailto:jpn.feedback@nsc.com)  
Tel: 81-3-5639-7560