

- AVAILABLE IN JAN, JANTX, JANTXV, AND JANS  
PER MIL-PRF-19500/406
- 1.5 WATT ZENER DIODES
- NON CAVITY CONSTRUCTION
- METALLURGICALLY BONDED

**1N6485  
THRU  
1N6491  
AND  
1N4460  
AND  
1N4461**


### MAXIMUM RATINGS

Operating Temperature: -65°C to +175°C  
 Storage Temperature: -65°C to +200°C  
 Power Dissipation: 1.5W @  $T_A=+25^\circ\text{C}$   
 Power Derating: 10mW/°C above  $T_A=+25^\circ\text{C}$   
 Forward Voltage: 1.0 V dc @  $I_F=200\text{mA}$  dc  
 1.5 V dc @  $I_F=1\text{A}$  dc

### ELECTRICAL CHARACTERISTICS @ 25°C, unless otherwise specified

TYPE	ZENER VOLTAGE $\pm 5\% V_Z$	TEST CURRENT $I_{ZT}$	DYNAMIC IMPEDENCE (MAX.) $Z_{ZT}@I_{ZT}$	KNEE IMPEDENCE (MAX.) $Z_{ZK}@I_{ZT}$	TEST CURRENT $I_{ZK}$	REVERSE CURRENT (MAX.) $I_R@V_R$	TEST VOLTAGE $V_R$	MAXIMUM CURRENT $I_{ZM}$	$V_Z$ (REG) $\Delta V_Z$	MAXIMUM SURGE
	VOLTS	mA	OHMS	OHMS	mA	$\mu\text{A}$	VOLTS	MA	VOLTS	AMPS
1N6485	3.3	76.0	10	400	1.0	50	1.0	433	.90	4.2
1N6486	3.6	69.0	10	400	1.0	50	1.0	397	.80	3.9
1N6487	3.9	64.0	9	400	1.0	35	1.0	366	.75	3.6
1N6488	4.3	58.0	9	400	1.0	5.0	1.0	332	.70	3.3
1N6489	4.7	53.0	8	500	1.0	4.0	1.0	304	.60	3.0
1N6490	5.1	49.0	7	500	1.0	1.0	1.0	280	.50	2.7
1N6491	5.6	45.0	5	600	1.0	0.5	2.0	255	.40	2.5
1N4460	6.2	40.0	4	200	1.0	10.0	3.72	230	.35	2.3
1N4461	6.8	37.0	2.5	200	1.0	5.0	4.08	210	.30	2.1

**NOTE:** Zener voltage is measured with the device junction in thermal equilibrium at an ambient temperature of  $25^\circ\text{C} \pm 3^\circ\text{C}$ .

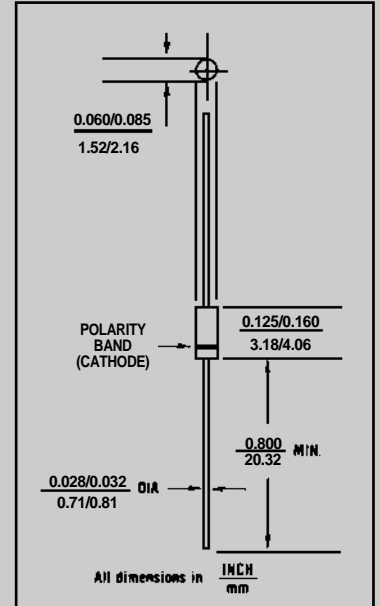

**FIGURE 1**

### DESIGN DATA

**CASE:** Hermetically sealed, Glass "A"  
 Body per MIL-PRF- 19500/406  
 D-5A

**LEAD MATERIAL:** Copper clad steel

**LEAD FINISH:** Tin / Lead

**THERMAL RESISTANCE:** ( $R_{\theta JL}$ ): 42  
 $^\circ\text{C}/\text{W}$  maximum at  $L = .375$

**THERMAL IMPEDANCE:** ( $Z_{\theta JX}$ ): 4.5  
 $^\circ\text{C}/\text{W}$  maximum


**POLARITY:** Diode to be operated with the banded (cathode) end positive.

**MOUNTING POSITION:** Any



# 1N6485 thru 1N6491 and 1N4460 and 1N4461

FIGURE 2

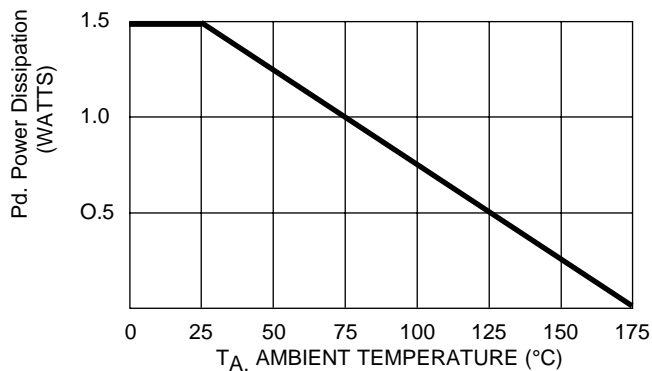

POWER DERATING CURVE

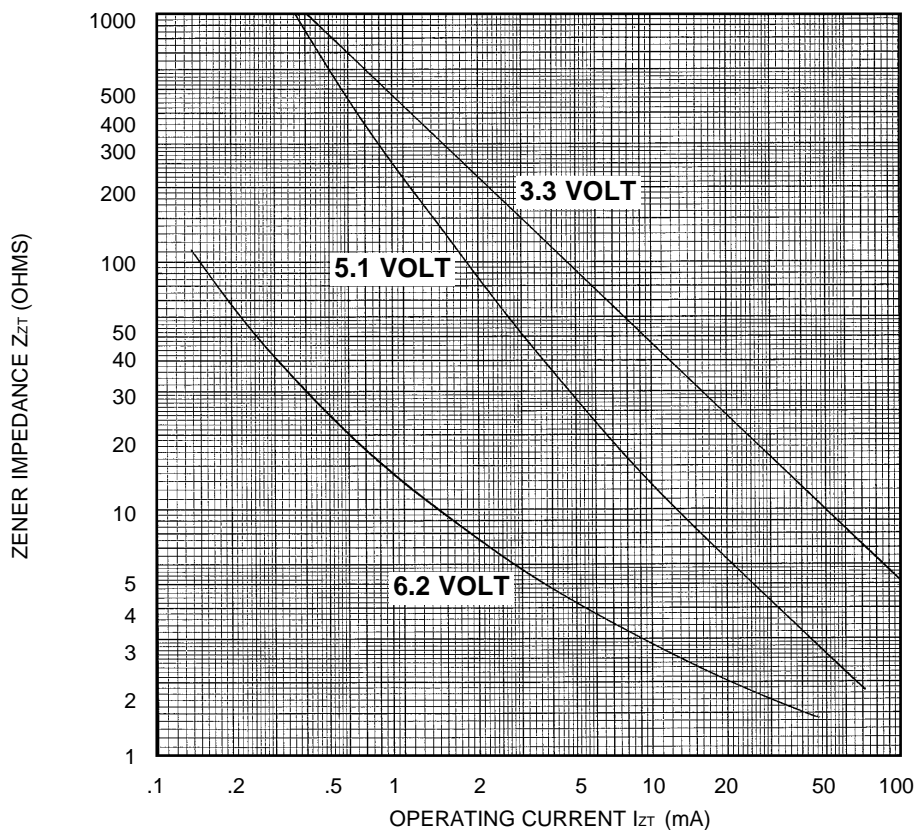


FIGURE 3

ZENER IMPEDANCE VS. OPERATING CURRENT



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

**[LittleDiode.com](http://LittleDiode.com)**

Looking forward to providing you with the best possible service.