



Phase-leg Rectifier Diode

$V_{RRM} = 1200/1600 \text{ V}$
 $I_{F(RMS)} = 2 \times 43 \text{ A}$
 $I_{F(AV)M} = 2 \times 28 \text{ A}$


V_{RSM}	V_{RRM}	TO-247 AD	TO-268 AA	ISOPLUS 247™
V	V	Type		
1300	1200	DSP 25-12A	DSP 25-12AT	
1700	1600	DSP 25-16A	DSP 25-16AT	DSP 25-16AR




TO-247 AD
Version A



TO-268 AA
Version AT



ISOPLUS 247™
Version AR



1 = Cathode, 2 = Anode/Cathode, 3 = Anode

Symbol	Test Conditions	Maximum Ratings
$I_{F(RMS)}$	$T_{VJ} = T_{VJM}$	43 A
$I_{F(AV)M}$	$T_{case} = 100^\circ\text{C}; 180^\circ \text{ sine}$	28 A
I_{FSM}	$T_{VJ} = 45^\circ\text{C}; t = 10 \text{ ms}$ (50 Hz), sine	300 A
	$t = 8.3 \text{ ms}$ (60 Hz), sine	330 A
I_{FT}	$T_{VJ} = 150^\circ\text{C}; t = 10 \text{ ms}$ (50 Hz), sine	270 A
	$t = 8.3 \text{ ms}$ (60 Hz), sine	300 A
T_{VJ}	$t = 10 \text{ ms}$ (50 Hz), sine	450 A ^{2s}
		450 A ^{2s}
	$t = 8.3 \text{ ms}$ (60 Hz), sine	340 A ^{2s}
		325 A ^{2s}
T_{VJM}	-40...+180	$^\circ\text{C}$
T_{stg}	180	$^\circ\text{C}$
M_d^*	mounting torque M3	0.8...1.2 Nm
F_c	mounting force with clip	20...120 N
V_{ISOL}^{**}	50/60 Hz, RMS, $t = 1 \text{ minute}$, leads-to-tab	2500 V~
Weight	TO-268 / TO-247	4 / 6 g

* Verson A only; ** Version AR only

Features

- International standard packages JEDEC TO-247 AD and TO-268 AA surface mountable
- For single and three phase bridge configuration
- Planar passivated chips
- Epoxy meets UL 94V-0 flammability classification
- Version AR isolated and UL registered E153432

Symbol	Test Conditions	Characteristic Values
I_R	$T_{VJ} = 150^\circ\text{C} \quad V_R = V_{RRM}$	$\leq 2 \text{ mA}$
V_F	$I_F = 55 \text{ A}; T_{VJ} = 25^\circ\text{C}$	$\leq 1.6 \text{ V}$
V_{T0}	For power-loss calculations only	0.8 V
r_T	$T_{VJ} = T_{VJM}$	15 m Ω
R_{thJC}	DC current	1.5 K/W
R_{thCH}	DC current (with heatsink compound)	0.4 K/W
a	Maximum allowable acceleration	100 m/s ²

TO-268 AA Outline

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.9	5.1	.193	.201
A ₁	2.7	2.9	.106	.114
A ₂	.02	.25	.001	.010
b	1.15	1.45	.045	.057
b ₂	1.9	2.1	.75	.83
C	.4	.65	.016	.026
D	13.80	14.00	.543	.551
E	15.85	16.05	.624	.632
E ₁	13.3	13.6	.524	.535
e	5.45 BSC		.215 BSC	
H	18.70	19.10	.736	.752
L	2.40	2.70	.094	.106
L ₁	1.20	1.40	.047	.055
L ₂	1.00	1.15	.039	.045
L ₃	0.25 BSC		.010 BSC	
L ₄	3.80	4.10	.150	.161

Data according to IEC 60747 and refer to a single diode
IXYS reserves the right to change limits, test conditions and dimensions

TO-247 AD and ISOPLUS 247™

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	19.81	20.32	0.780	0.800
B	20.80	21.46	0.819	0.845
C	15.75	16.26	0.610	0.640
D*	3.55	3.65	0.140	0.144
E	4.32	5.49	0.170	0.216
F	5.4	6.2	0.212	0.244
G	1.65	2.13	0.065	0.084
H	-	4.5	-	0.177
J	1.0	1.4	0.040	0.055
K	10.8	11.0	0.426	0.433
L	4.7	5.3	0.185	0.209
M	0.4	0.8	0.016	0.031
N	1.5	2.49	0.087	0.102

* ISOPLUS 247™ without hole

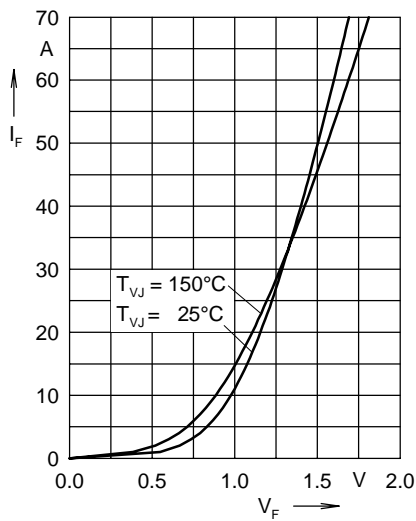


Fig. 1 Forward current versus voltage drop per diode

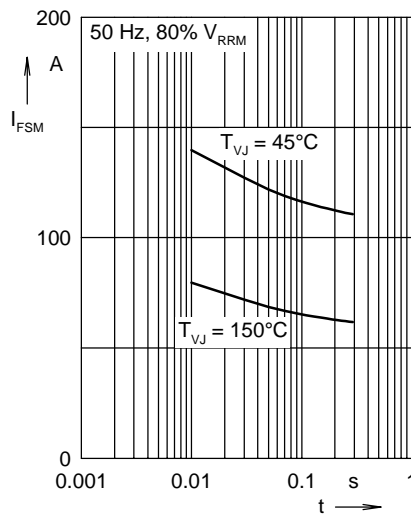


Fig. 2 Surge overload current

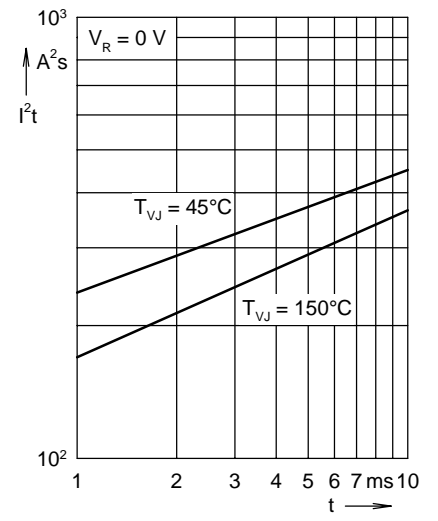


Fig. 3 I^2t versus time per diode

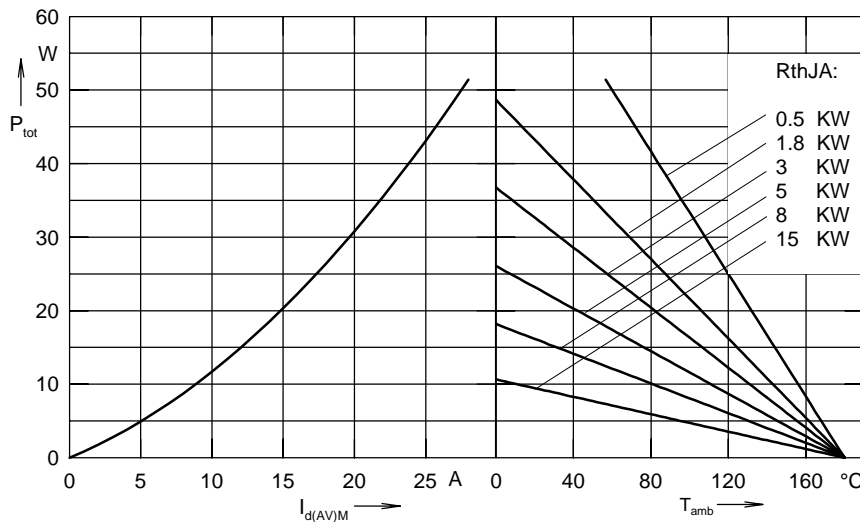


Fig. 4 Power dissipation versus direct output current and ambient temperature, sine 180°

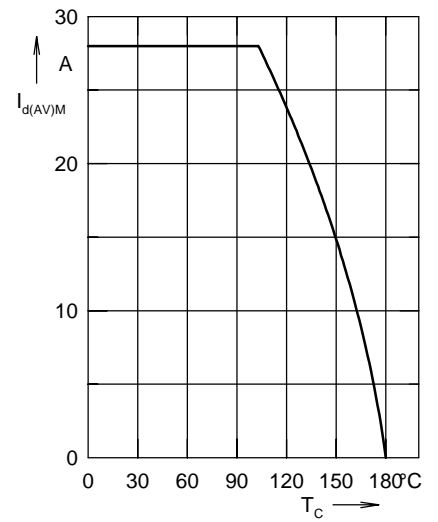


Fig. 5 Max. forward current versus case temperature

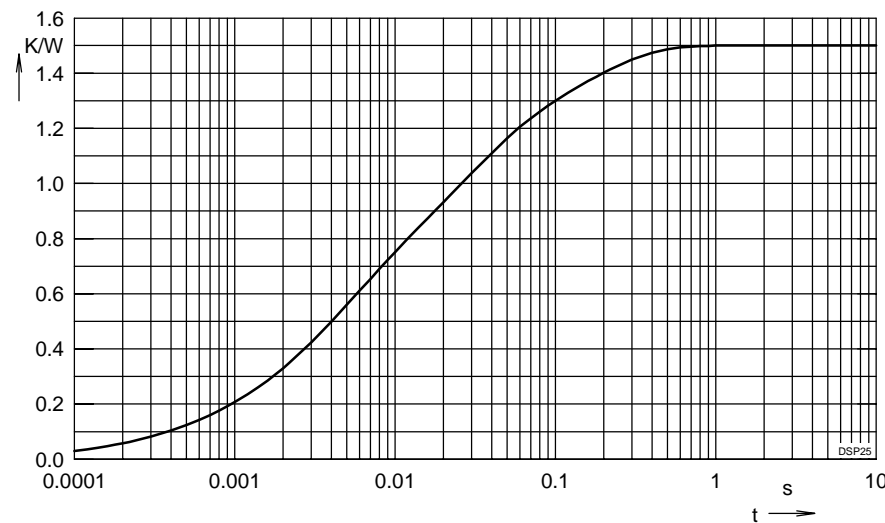


Fig. 6 Transient thermal impedance junction to case

Constants for Z_{thjC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.06075	0.0004
2	0.183	0.00256
3	0.3405	0.0045
4	0.543	0.0242
5	0.3728	0.15



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.