


Ultrafast Plastic Rectifier

Reverse Voltage 50 to 1000 V

Forward Current 1.0 A

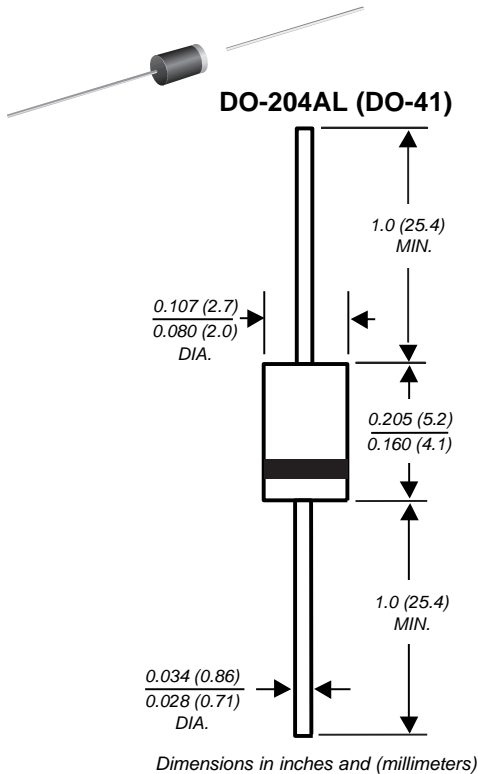

Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- Ideally suited for use in very high frequency switching power supplies, inverters and as free wheeling diodes
- Ultrafast recovery time for high efficiency
- Excellent high temperature switching
- Soft recovery characteristics
- Glass passivated junction
- High temperature soldering guaranteed: 250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

Mechanical Data

Case: JEDEC DO-204AL molded plastic body over passivated chip

Terminals: Axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.012 ounce, 0.34 gram

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	UF 4001	UF 4002	UF 4003	UF 4004	UF 4005	UF 4006	UF 4007	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current 0.375" (9.5mm) lead length at T _A =55°C	I _{F(AV)}	1.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	30							A
Typical thermal resistance (NOTE 1)	R _{θJA}	60							°C/W
	R _{θJL}	15							
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +150°C							°C

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	UF 4001	UF 4002	UF 4003	UF 4004	UF 4005	UF 4006	UF 4007	UNITS
Maximum instantaneous forward voltage at 1.0A (NOTE 2)	V _F	1.0				1.7			V
Maximum DC reverse current T _A = 25°C at rated DC blocking voltage T _A =100°C	I _R	10				50			μA
Maximum reverse recovery time I _F =0.5A, I _R =1.0A, I _{rr} = 0.25A	t _{rr}	50				75			ns
Typical junction capacitance at 4.0V, 1MHz	C _J	17							pF

NOTES:

(1) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length

(2) Pulse test: 300μs pulse width, 1% duty cycle

Ratings and Characteristic Curves (T_A = 25°C unless otherwise noted)

FIG. 1 - MAXIMUM FORWARD CURRENT DERATING CURVE

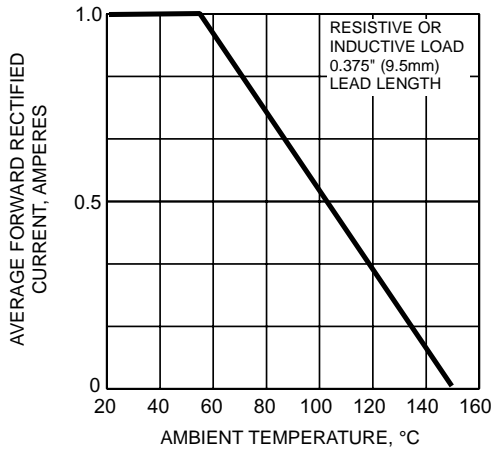


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

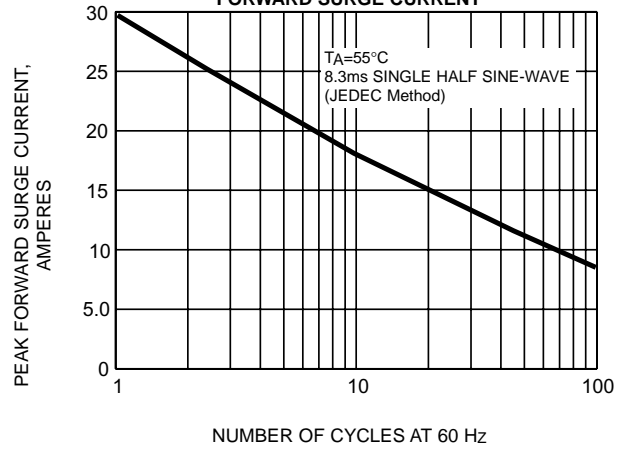


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

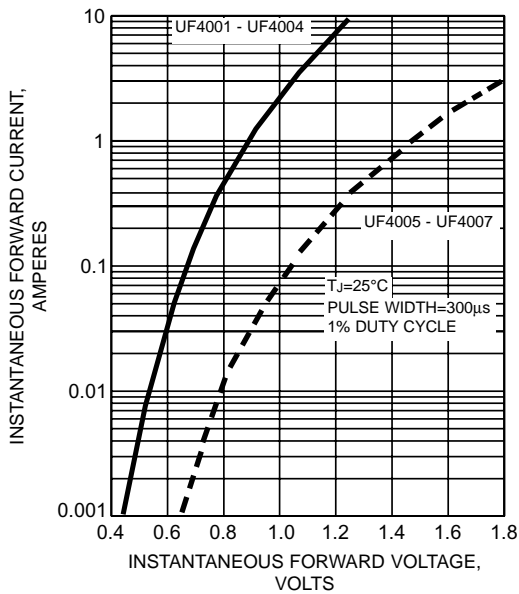


FIG. 4 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS

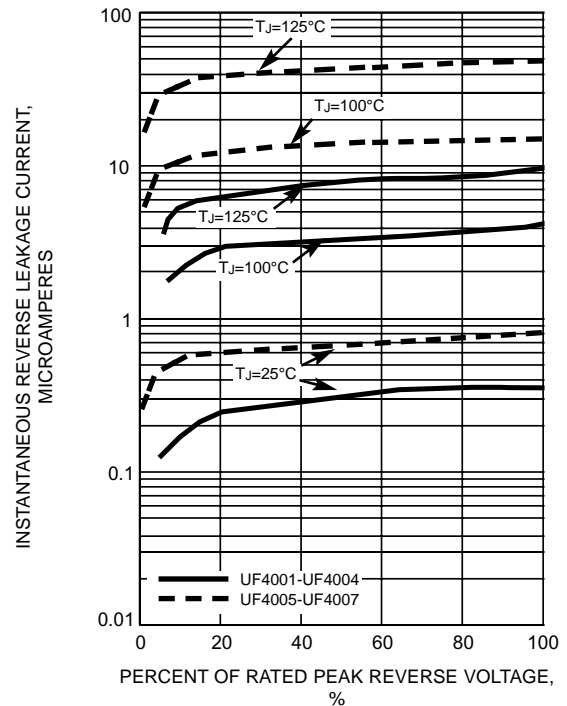


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

