

GP1A34LC

OPIC Photointerrupter with Connector

■ Features


1. Snap-in mounting type
2. Can be mounted on 2 different thickness boards (1.0mm, 1.6mm).
3. Uses 3-pin connector terminal
4. High sensing accuracy (Slit width: 0.5mm)
5. Wide gap between light emitter and detector (5mm)

■ Applications

1. Copiers, printers, facsimiles

■ Outline Dimensions

(Unit : mm)

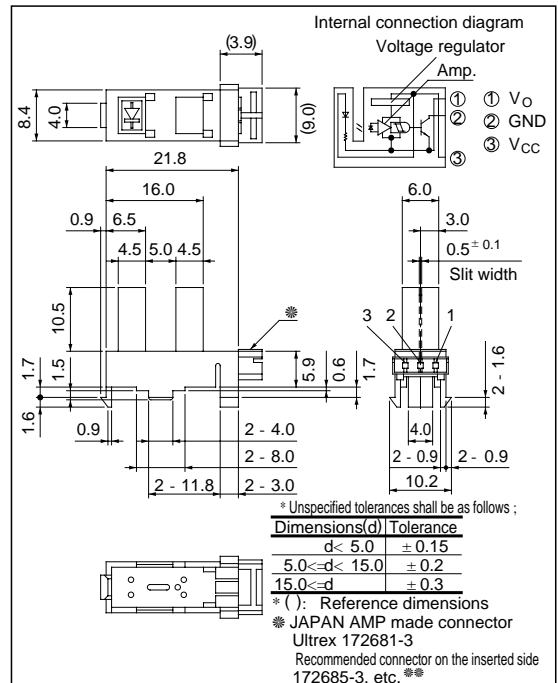

***OPIC™ (Optical IC) is a trademark of the SHARP Corporation.

An OPIC consists of a light-detecting element and signal-processing circuit integrated onto a single chip.

※※ Recommended connectors on the inserted side are shown on the page after next.

■ Absolute Maximum Ratings (Ta = 25°C)

Parameter	Symbol	Rating	Unit
Supply voltage	V _{CC}	- 0.5 to + 7	V
*1 Output voltage	V _O	- 0.5 to + 13	V
*2 Low level output current	I _{OL}	10	mA
*3 Operating temperature	T _{opr}	- 20 to + 75	°C
*3 Storage temperature	T _{stg}	- 30 to + 85	°C


*1 Collector-emitter voltage of output transistor

*2 Collector current of output transistor

*3 The connector should be plugged in/out and the unit's hook should be used at normal temperature.

■ Electro-optical Characteristics

($V_{CC}= 5V, T_a= 25^{\circ}C$)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Operating supply voltage		V_{CC}		4.5	-	5.5	V
Low level supply current		I_{CCL}	Light beam uninterrupted	-	-	30	mA
Low level output voltage		V_{OL}	Light beam uninterrupted, $I_{OL}= 2.5mA$	-	-	0.4	V
High level supply current		I_{CCH}	Light beam interrupted	-	-	30	mA
High level output voltage		V_{OH}	Light beam interrupted, $R_L= 47k\Omega$	$V_{CC} \times 0.9$	-	-	V
*5 Response frequency		f	*4 $R_L= 47k\Omega$, $R_L= 280\Omega$	-	-	3 000	Hz
Response time	Rise time	t_r		-	0.1	0.5	μs
	Fall time	t_f		-	0.05	0.5	μs

*4 Output should not be DC level

*5 Response frequency is measured with the disk shown below being rotated. (Unit : mm)

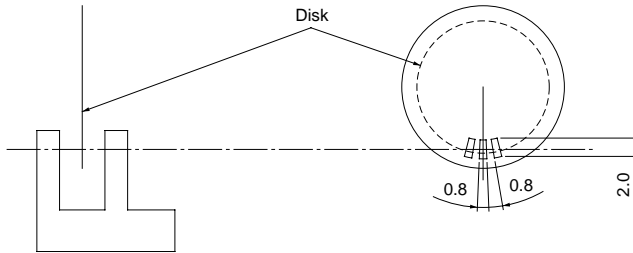


Fig. 1 Low Level Output Current vs. Ambient Temperature

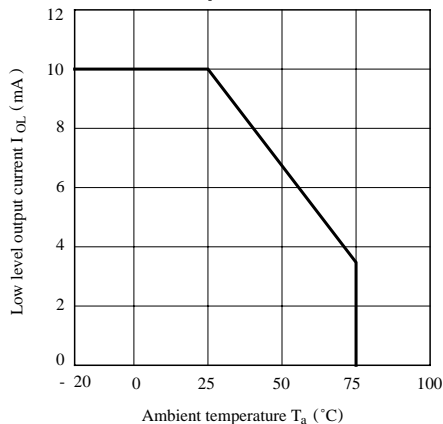


Fig. 2 Low Level Output Voltage vs. Low Level Output Current

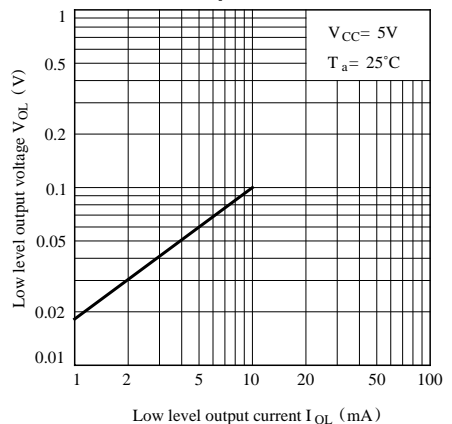


Fig. 3 Low Level Output Voltage vs. Ambient Temperature

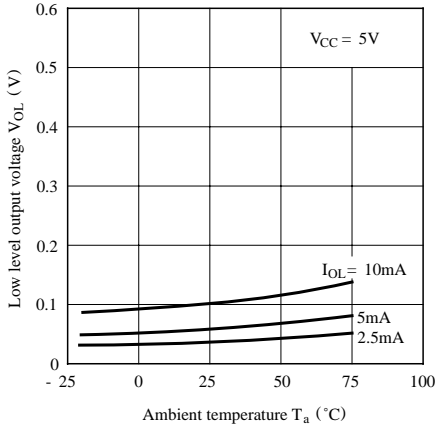


Fig. 4 Supply Current vs. Supply Voltage

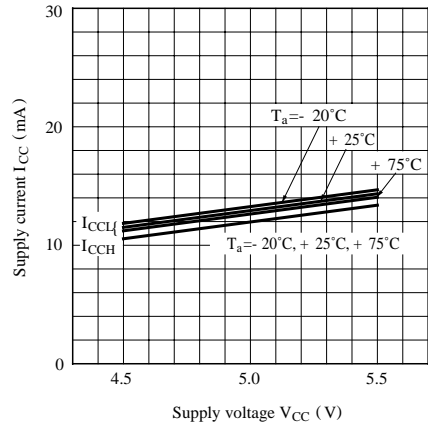


Fig. 5 Detecting Position Characteristics (1)


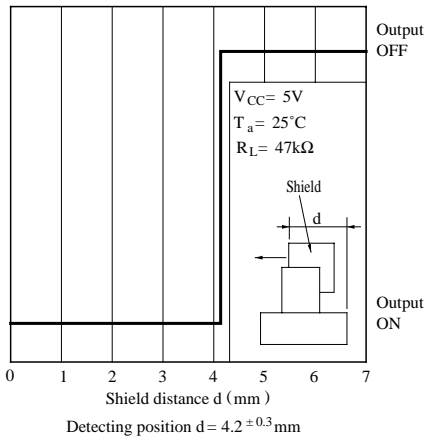


Fig. 6 Detecting Position Characteristics (2)

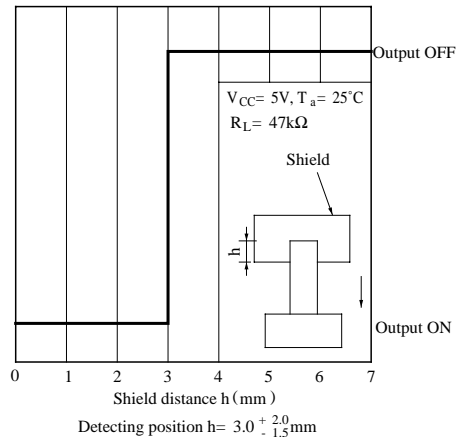

Recommended Connectors on the Inserted Side

- JAPAN AMP made Ultrex connector (Solderless type)

Housing Model No.	172677-3			
Special terminal Model No.	AWG size	Product shape	Material	Model No.
	30 to 26	Chain	Copper phosphide	171609-1
		Bulk		171611-1
		Chain		171610-1
		Bulk		171612-1

- JAPAN AMP made Ultrex connector (mass termination type)

172685-3

Recommended Mounting Holes

Same as **GP1S09**

■ Precautions for Use

- (1) In this product, the PWB is fixed with a hook, and cleaning solvent may remain inside the case; therefore, dip cleaning or ultrasonic cleaning are prohibited.
 - (2) Remove dust or stains, using an air blower or a soft cloth moistened in cleaning solvent. However, do not perform the above cleaning using a soft cloth with cleaning solvent in the marking portion.
In this case, use only the following type of cleaning solvent used for wiping off:
Ethyl alcohol, Methyl alcohol, Isopropyl alcohol
When the cleaning solvents except for specified materials are used, please consult us.
 - (3) In order to stabilize power supply line, connect a by-pass capacitor of more than $0.01\mu\text{F}$ between Vcc and GND near the device.
 - (4) As for other general cautions, refer to the chapter "Precautions for Use".
-



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.