

GP1A05/GP1A22LC/ GP1A23LC/GP1A25LC

OPIC Photointerrupter with Connector

■ Features

1. Uses 3-pin connector terminal
2. High sensing accuracy (Slit width : 0.5mm)
3. Wide gap between light emitter and detector (5mm)


■ Applications

1. Copiers, Printers
2. Facsimiles

* "OPIC" (Optical IC) is a trademark of SHARP Corporation. An OPIC consists of a light-detecting element and signal-processing circuit integrated onto a single chip.


■ Outline Dimensions

(Unit : mm)

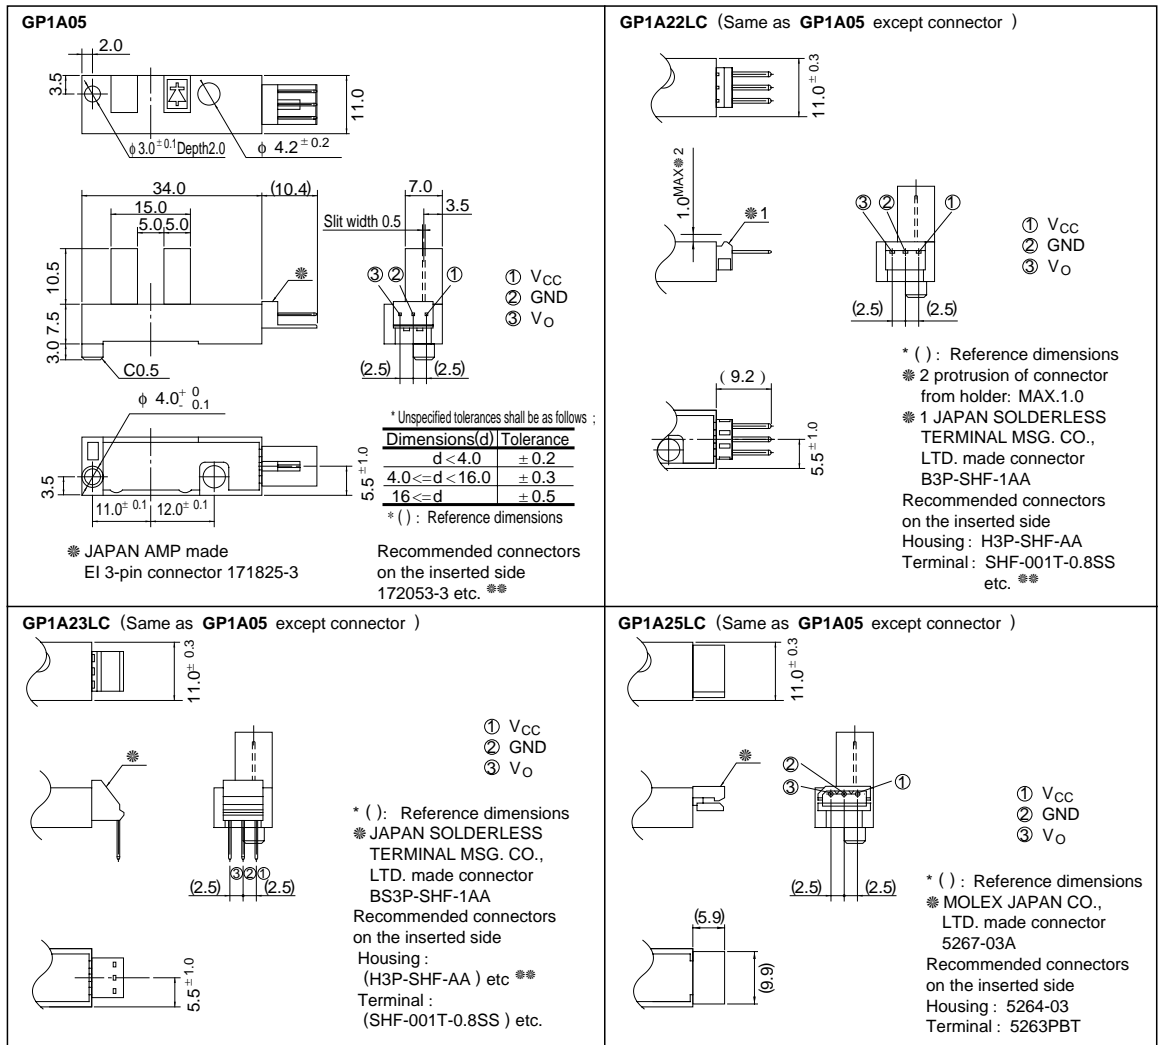

** Recommended connectors on the inserted side are show on the following 3rd page.

Internal connection diagram (Common to 4 models)

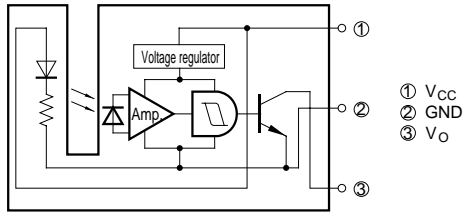

Absolute Maximum Ratings

(Ta = 25°C)

Parameter		Symbol	Rating	Unit
Supply voltage	GP1A05	V _{CC}	- 0.5 to + 10	V
	GP1A22LC/GP1A23LC/GP1A25LC		- 0.5 to + 8	
*1 Output voltage		V _O	- 0.5 to + 28	V
*2 Low level output current		I _{OL}	50	mA
*3 Operating temperature		T _{opr}	- 20 to + 75	°C
*3 Storage temperature	GP1A05/GP1A22LC/GP1A23LC	T _{stg}	- 40 to + 85	°C
	GP1A25LC		- 30 to + 85	

*1 Collector-emitter voltage of output transistor

*2 Collector current of output transistor

*3 The connector should be plugged in/out at normal temperature.

Electro-optical Characteristics

(Unless otherwise specified, V_{CC} = 5V, Ta = 25°C)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Operating supply voltage	V _{CC}		4.5	-	5.5	V
Low level supply current	I _{CCL}	Light beam uninterrupted	-	-	30	mA
Low level output voltage	V _{OL}	Light beam uninterrupted, I _{OL} = 16mA	-	-	0.35	V
High level supply current	I _{CCH}	Light beam interrupted	-	-	30	mA
High level output voltage	V _{OH}	Light beam interrupted, R _L = 47k Ω	V _{CC} × 0.9	-	-	V
*5 Response frequency	f	*4 R _L = 47k Ω	-	-	3 000	Hz

*4 No DC output is allowed.

*5 Response frequency is measured with the disk shown below being rotated. (Unit : mm)

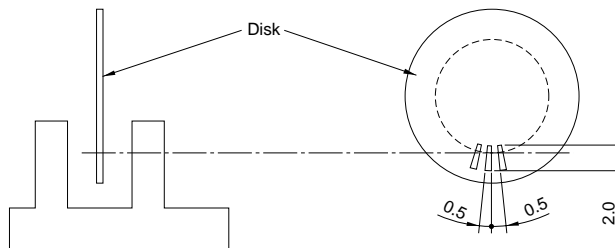


Fig. 1 Low Level Output Current vs. Ambient Temperature

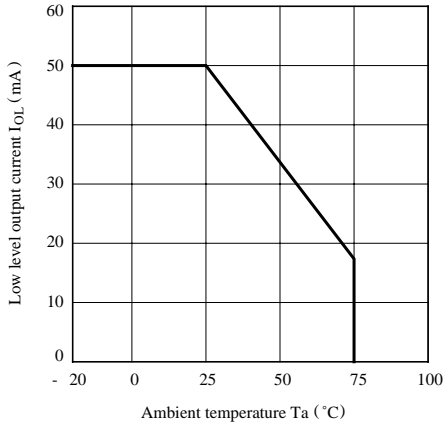


Fig. 2 Low Level Output Voltage vs. Low Level Output Current

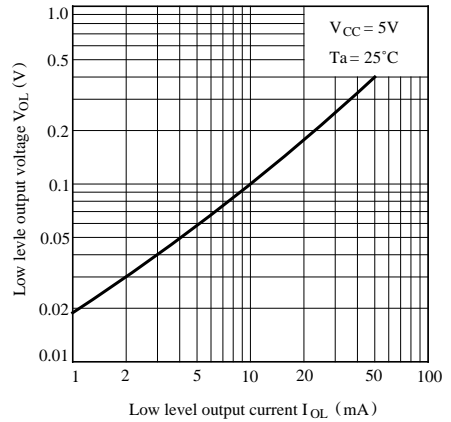


Fig. 3 Low Level Output Voltage vs. Ambient Temperature

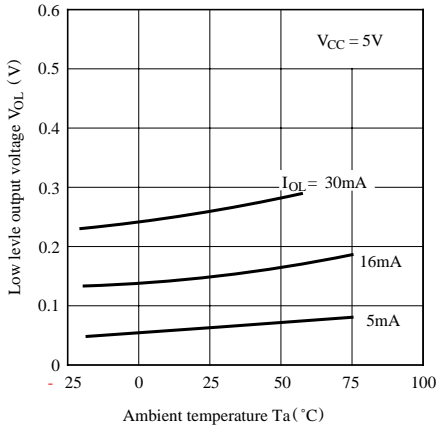


Fig. 4 Supply Current vs. supply Voltage

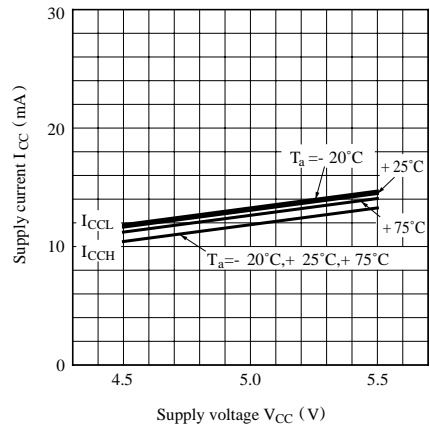


Fig. 5 Detecting Position Characteristics (1)


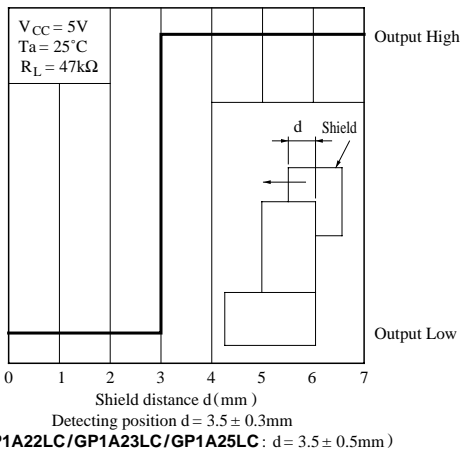


Fig. 6 Detecting Position Characteristics (2)

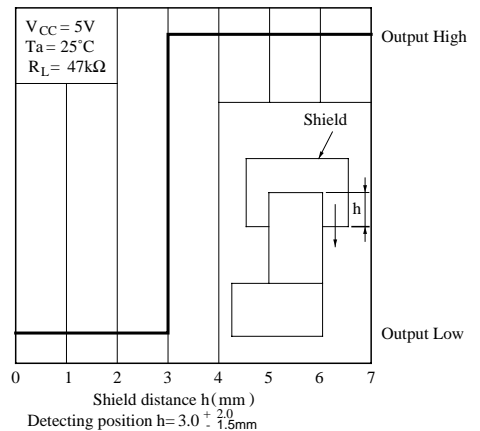

■ Recommended Connectors on the Inserted Side

Recommended connectors on the inserted side for **GP1A05**, **GP1A22LC**, and **GP1A23LC** are shown below.

<<GP1A05>>

● JAPAN AMP made EI series connectors (standard type)

Housing color	Natural color	Black	Blue	Green	Red
Housing Model No.	171822-3	2-171822-3	4-171822-3	6-171822-3	8-171822-3
Special terminal Model. No.	AWG size	Product shape	Material	Model No.	
				Bulk	Brass
	Copper phosphide	170204-2			
	Brass	170262-1			
	Chain	Copper phosphide	170262-2		
		Bulk	Brass	170205-1	
			Copper phosphide	170205-2	
	AWG 30 to 26	Bulk	Brass	170263-1	
			Copper phosphide	170263-2	
		Chain	Copper phosphide	170263-2	

● JAPAN AMP made EI series connectors (low profile type)

Housing color	Natural color	Black	Blue	Green	Red
Housing Model No.	172142-3	2-172142-3	4-172142-3	6-172142-3	8-172142-3
Special terminal Model. No. (Material: Copper phosphide)	AWG size	Product shape	Model No.		
			Bulk	170369-1	
	Chain	170354-1			
	AWG 26 to 22	Bulk	170370-1		
			Chain	170355-1	
	AWG 30 to 26	Bulk	170370-1		
Chain			170355-1		

● JAPAN AMP made EI series connectors (amp mass termination)

Housing-terminal united type connector	AWG28 (Green)	AWG26 (Natural color)	AWG24 (Black)	AWG22 (Red)
	172054-3	172053-3	172052-3	172051-3

* Terminal Material : Copper phosphide

<<GP1A22LC/ GP1A23LC>>

● JAPAN SOLDERLESS TERMINAL MSG. CO., LTD. made (Natural color •bulk)

Housing Model No.	H3P-SHF-AA			S3P-SHF-1		
	AWG size	Material	Model No.	AWG size	Material	Model No.
Special terminal Model. No.	AWG 26 to 22	Brass	SHF-001T-0.8SS	AWG 27 to 22	Brass	SHF-001T-0.8P
		Copper phosphide	SHF-001T-0.8BS		Copper phosphide	-
	AWG 30 to 26	Brass	SHF-002T-0.8SS	AWG 30 to 28	Brass	SHF-002T-0.8P
		Copper phosphide	SHF-001T-0.8BS		Copper phosphide	-

■ Precautions for Use

- (1) It is recommended that a by-pass capacitor of more than 0.01 μ F be added between V_{CC} and GND near the device in order to stabilize power supply line.
- (2) In this product, the PWB is fixed with a rear cover, and cleaning solvent may remain inside the case; therefore, dip cleaning or ultrasonic cleaning is prohibited.
- (3) Remove dust or stains, using an air blower or a soft cloth moistened in cleaning solvent. However, do not perform the above cleaning using a soft cloth with cleaning solvent in the marking portion.

In this case, use only the following type of cleaning solvent used for wiping off:

Ethyl alcohol, Methyl alcohol, Isopropyl alcohol,

When the cleaning solvents except for specified materials are used, please consult us.

- (4) As for other general cautions, refer to the chapter "Precautions for Use".



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.