

# GP1A20

## OPIC Photointerrupter with Cover Case

### ■ Features


1. With cover case
2. High sensing accuracy (Slit width : 0.5mm)
3. Operating supply voltage  $V_{CC}$  : 4.5 to 17V
4. PWB mounting type package

### ■ Applications

1. Printers
2. Ticket vending machines

### ■ Outline Dimensions

(Unit : mm)

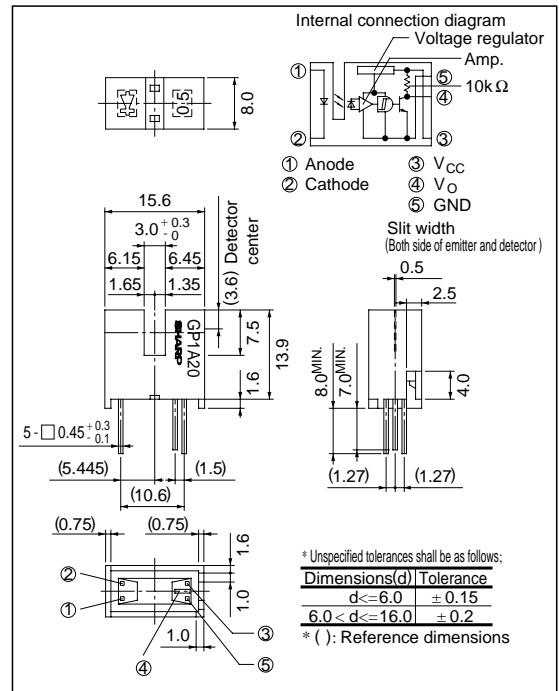

\*“OPIC” (Optical IC) is a trademark of the SHARP Corporation.  
 An OPIC consists of a light-detecting element and signal-processing circuit integrated onto a single chip.

### ■ Absolute Maximum Ratings

(Ta = 25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	$I_F$	50	mA
	*1 Peak forward current	$I_{FM}$	1	A
	Reverse voltage	$V_R$	6	V
	Power dissipation	$P$	75	mW
Output	Supply voltage	$V_{CC}$	- 0.5 to + 17	V
	Output current	$I_O$	50	mA
	Power dissipation	$P_O$	250	mW
Operating temperature		$T_{opr}$	- 25 to + 85	°C
Storage temperature		$T_{stg}$	- 40 to + 100	°C
*2 Soldering temperature		$T_{sol}$	260	°C

\*1 Pulse width  $\leq 100\mu$ s, Duty ratio = 0.01

\*2 For 5 seconds

## Electro-optical Characteristics

(Ta = 25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Input	Forward voltage	$V_F$	$I_F = 10\text{mA}$	-	1.1	1.4	V	
	Reverse current	$I_R$	$V_R = 3\text{V}$	-	-	10	$\mu\text{A}$	
Output	Operating supply voltage	$V_{CC}$		4.5	-	17	V	
	Low level output voltage	$V_{OL}$	$I_{OL} = 16\text{mA}, V_{CC} = 5\text{V}, I_F = 0$	-	0.15	0.4	V	
	High level output voltage	$V_{OH}$	$V_{CC} = 5\text{V}, I_F = 10\text{mA}$	4.9	-	-	V	
	Low level supply current	$I_{CCL}$	$V_{CC} = 5\text{V}, I_F = 0$	-	2.5	5.0	mA	
	High level supply current	$I_{CCH}$	$V_{CC} = 5\text{V}, I_F = 10\text{mA}$	-	1.0	3.0	mA	
	Transfer characteristics	*3 "Low→High" threshold input current	$I_{FLH}$	$V_{CC} = 5\text{V}$	-	2.0	9.5	mA
*4 Hysteresis		$I_{FHL} / I_{FLH}$	$V_{CC} = 5\text{V}$	0.55	0.75	0.95	-	
Response time		"Low→High" propagation delay time	$t_{PLH}$	$V_{CC} = 5\text{V}$ $I_F = 10\text{mA}$ $R_L = 280\Omega$	-	3	9	$\mu\text{s}$
		"High→Low" propagation delay time	$t_{PHL}$		-	5	15	
		Rise time	$t_r$		-	0.1	0.5	
		Fall time	$t_f$		-	0.05	0.5	

\*3  $I_{FLH}$  represents forward current when output changes from low to high.

\*4  $I_{FHL}$  represents forward current when output changes from high to low.

Hysteresis stands for  $I_{FHL} / I_{FLH}$ .

## Recommended Operating Conditions

Parameter	Symbol	Operating temperature	MIN.	MAX.	Unit
Low level output current	$I_{OL}$	Ta = 0 to + 70°C	-	16	mA
Forward current	$I_F$		10	20	mA

Fig. 1 Forward Current vs. Ambient Temperature



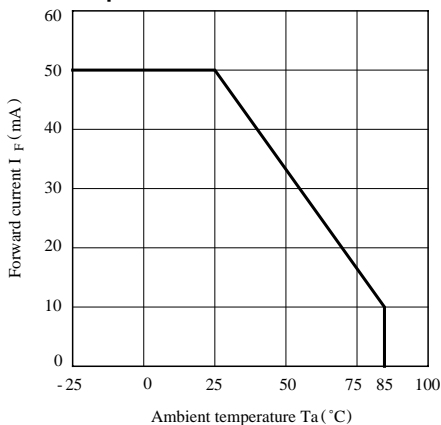



Fig. 2 Output Power Dissipation vs. Ambient Temperature

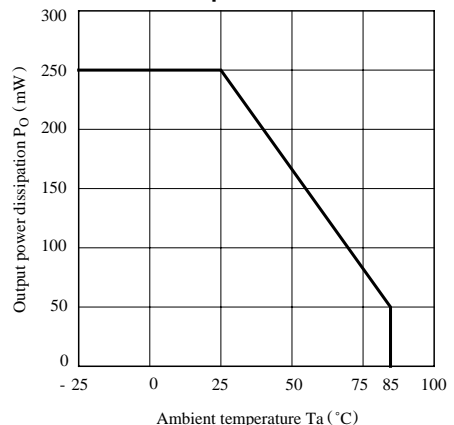


**Fig. 3 Low Level Output Current vs. Ambient Temperature**

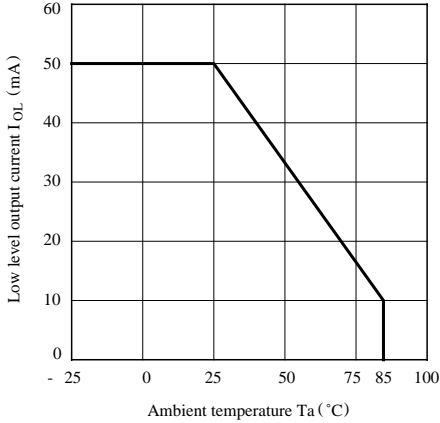


**Fig. 4 Forward Current vs. Forward Voltage**

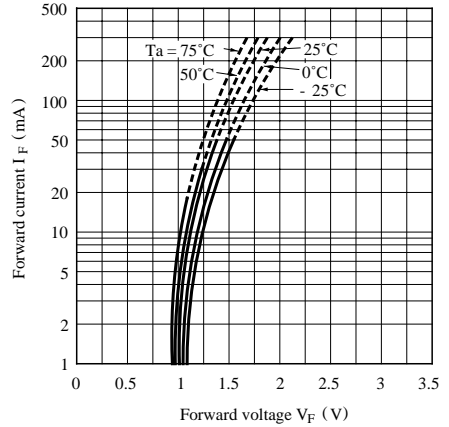


**Fig. 5 Relative Threshold Input Current vs. Supply Voltage**

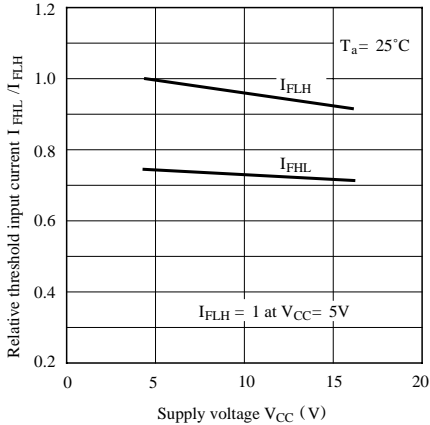

**Fig. 6 Relative Threshold Input Current vs. Ambient Temperature**

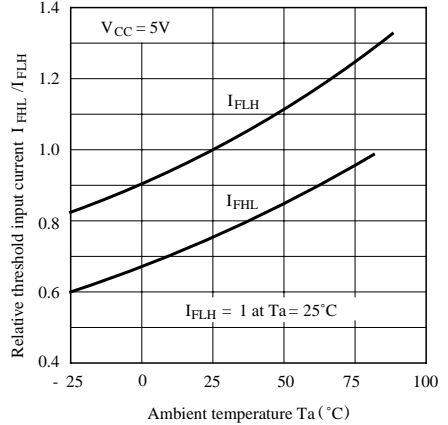

**Fig. 7 Low Level Output Voltage vs. Low Level Output Current**

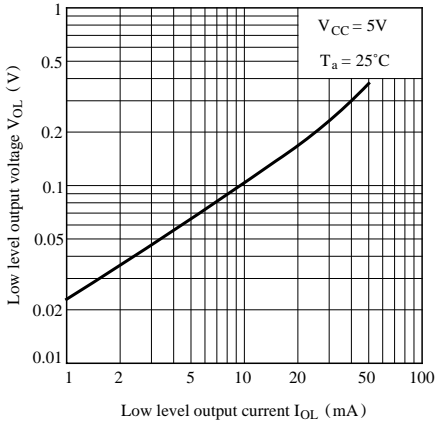

**Fig. 8 Low Level Output Voltage vs. Ambient Temperature**

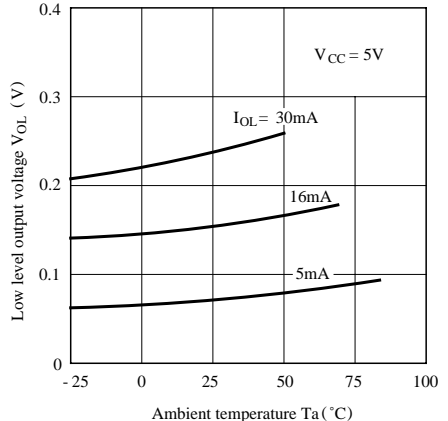


Fig. 9 Supply Current vs. Supply Voltage

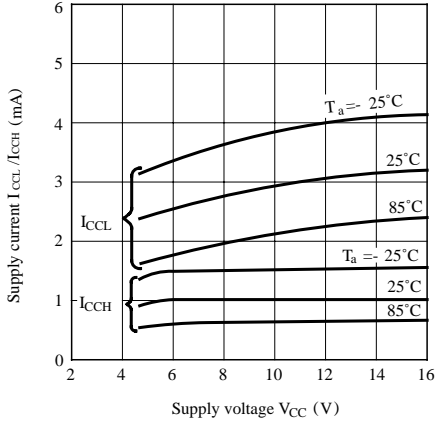


Fig.10 Propagation Delay Time vs. Forward Current




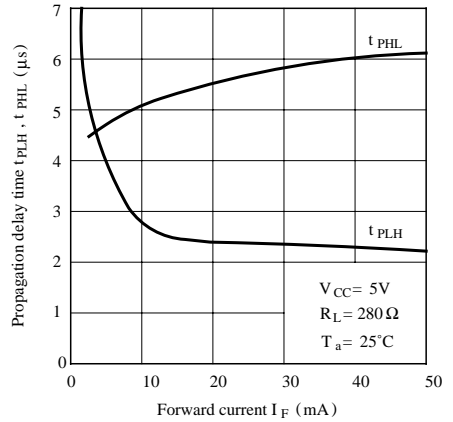


Fig.11 Rise Time, Fall Time vs. Load Resistance

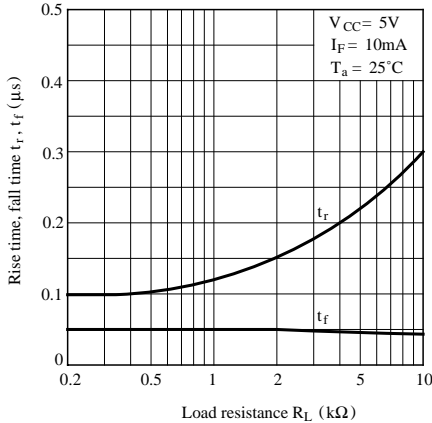

Test Circuit for Response Time

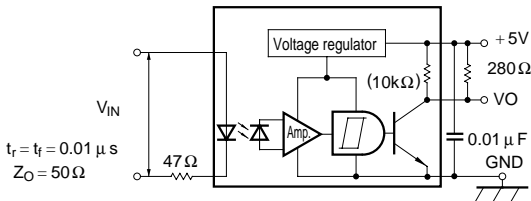

■ Precautions for Use

- (1) In this product, flux in the cleaning solvent may remain inside the slit of holder. It sometimes causes lower output; therefore, cleaning is prohibited.
- (1) In order to stabilize power supply line, connect a by-pass capacitor of more than 0.01 μF between V<sub>CC</sub> and GND near the device.
- (3) As for other general cautions refer to the chapter “Precautions for Use”.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.