

SILICON MULTIPLIER VARACTOR DIODE


DESCRIPTION:

The **1N4387** is a High Power Silicon Multiplier Varactor Diode.

MAXIMUM RATINGS

I_O	200 mA
V_R	150 V
P_{DISS}	20 W @ $T_C = 25^\circ\text{C}$
T_J	-65°C to $+150^\circ\text{C}$
T_{STG}	-65°C to $+175^\circ\text{C}$
θ_{JC}	5.0 $^\circ\text{C/W}$

PACKAGE STYLE DO-4				
SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN.	MAX.	MIN.	MAX.
A		0.405		10.28
b		0.250		6.35
c				
ϕD		0.505		12.82
ϕD_1	0.265	0.424	6.74	10.76
E	0.423	0.438	10.75	11.12
F_1	0.075	0.175	1.91	4.44
J	0.600	0.800	15.24	20.32
ϕM	0.163	0.189	4.15	4.80
N	0.422	0.453	10.72	11.50
N_1		0.078		1.98
S				
ϕT	0.060	0.095	1.53	2.41
ϕW	10-32	UNF-2A	10-32	UNF-2A

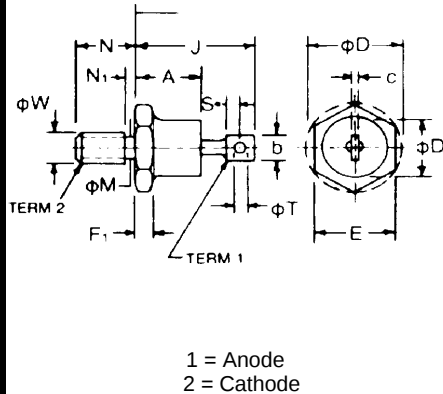

CHARACTERISTICS $T_C = 25^\circ\text{C}$

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
V_{BR}	$I_R = 10 \mu\text{A}$	150			V
C_T	$V_R = 6.0 \text{ V}$ $f = 1.0 \text{ MHz}$			35	pF
Q	$V_R = 6.0 \text{ V}$ $f = 50 \text{ MHz}$		200		---
f_{in}				150	MHz
$P_{OUT(x3)}$	$P_{IN} = 30 \text{ W}$ $F_{IN} = 150 \text{ MHz}$	15		30	W

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.