

GL4800

Thin Type Infrared Emitting Diode

■ Features


1. Thin type (Thickness : 1.5mm)
2. Beam angle ($\Delta\theta$: TYP. $\pm 30^\circ$)
3. Radiant flux
(Φ_e : MIN. 0.7mW at $I_F = 20\text{mA}$)
4. Epoxy resin package

■ Applications

1. Floppy disk drives
2. Optoelectronic switches

■ Outline Dimensions

(Unit : mm)

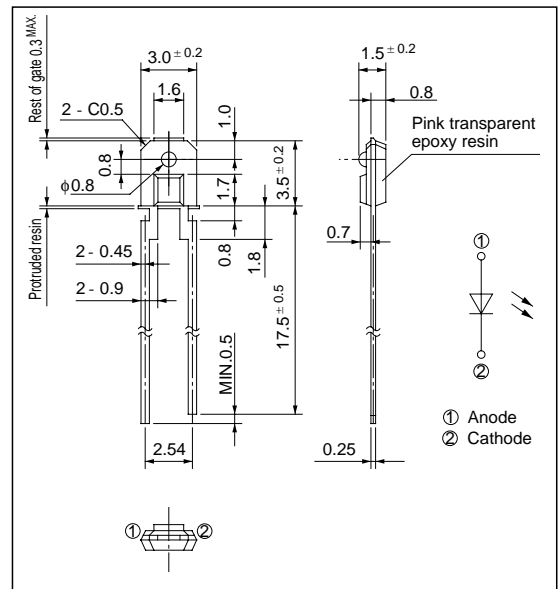

■ Absolute Maximum Ratings

(Ta = 25°C)

Parameter	Symbol	Rating	Unit
Power dissipation	P	75	mW
Forward current	I_F	50	mA
*1 Peak forward current	I_{FM}	1	A
Reverse voltage	V_R	6	V
Operating temperature	T_{opr}	- 25 to + 85	°C
Storage temperature	T_{stg}	- 40 to + 85	°C
*2 Soldering temperature	T_{sol}	260	°C

*1 Pulse width $\leq 100\mu\text{s}$, Duty ratio = 0.01

*2 For 3 seconds at the position of 1.8mm from the surface of resin edge.

■ Electro-optical Characteristics

(Ta = 25°C)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Forward voltage	V_F	$I_F = 20\text{mA}$	-	1.2	1.4	V
Peak forward voltage	V_{FM}	$I_{FM} = 0.5\text{A}$	-	3.0	4.0	V
Reverse current	I_R	$V_R = 3\text{V}$	-	-	10	μA
Terminal capacitance	C_t	$V_R = 0, f = 1\text{MHz}$	-	70	-	pF
Frequency response	f_c	-	-	300	-	kHz
Radiant flux	Φ_e	$I_F = 20\text{mA}$	0.7	1.6	3.0	mW
Peak emission wavelength	λ_p	$I_F = 5\text{mA}$	-	950	-	nm
Half intensity wavelength	$\Delta\lambda$	$I_F = 5\text{mA}$	-	45	-	nm

Fig. 1 Forward Current vs. Ambient Temperature

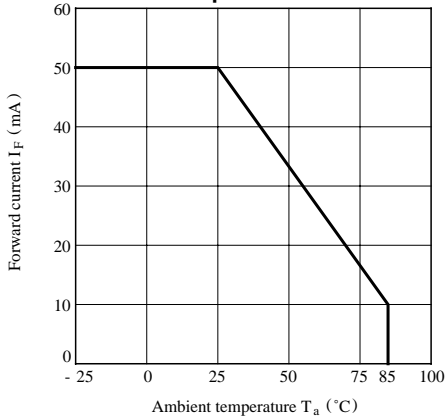


Fig. 2 Peak Forward Current vs. Duty Ratio

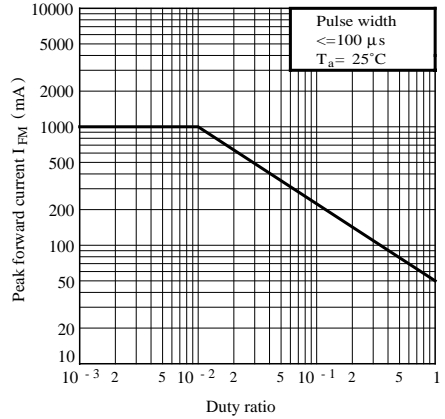


Fig. 3 Spectral Distribution

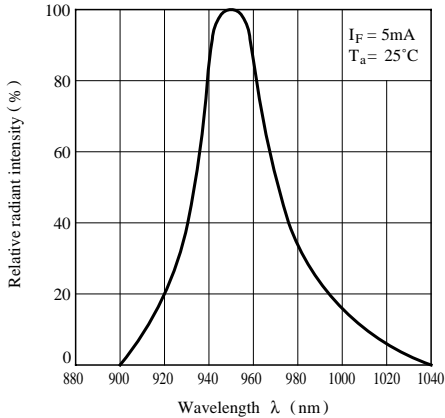


Fig. 4 Peak Emission Wavelength vs. Ambient Temperature

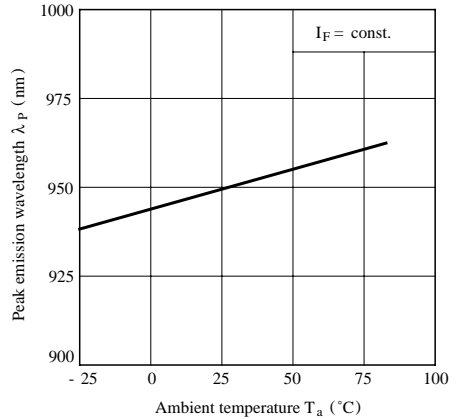


Fig. 5 Forward Current vs. Forward Voltage

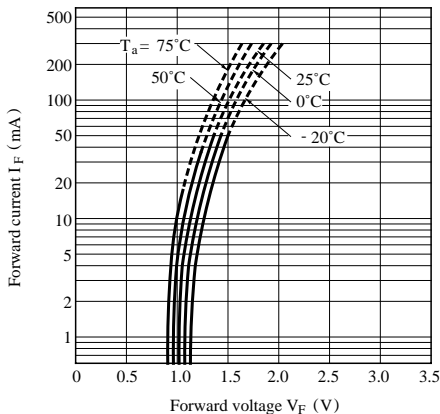


Fig. 6 Relative Radiant Flux vs. Ambient Temperature

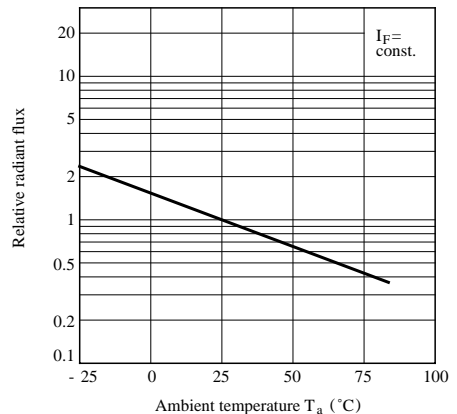


Fig. 7 Radiant Flux vs. Forward Current

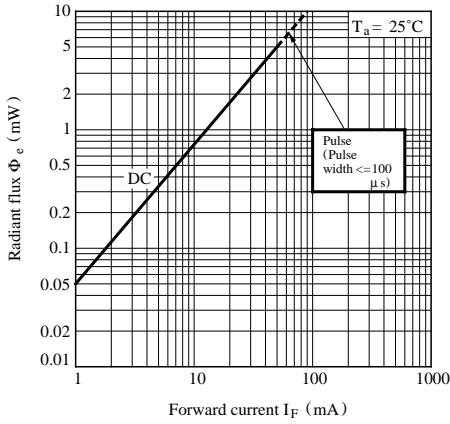


Fig. 8 Relative Radiant Intensity vs. Distance

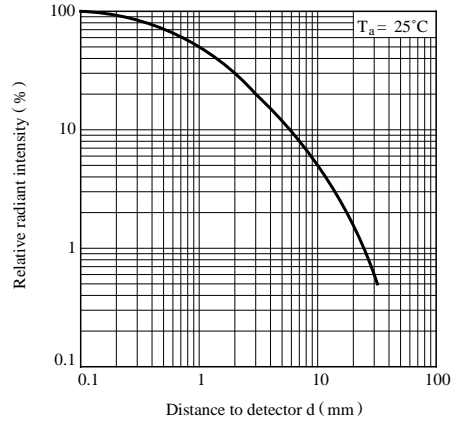


Fig. 9 Relative Collector Current vs. Distance (Detector : PT4800)


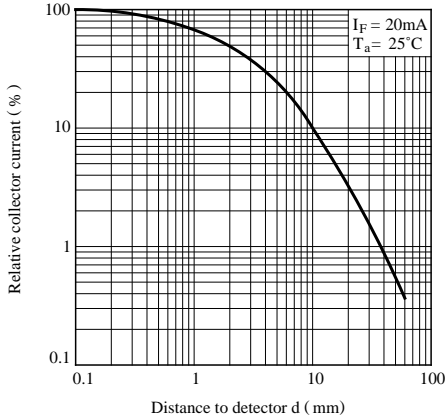


Fig.10 Radiation Diagram ($T_a = 25^\circ C$)



● Please refer to the chapter “Precautions for Use.”

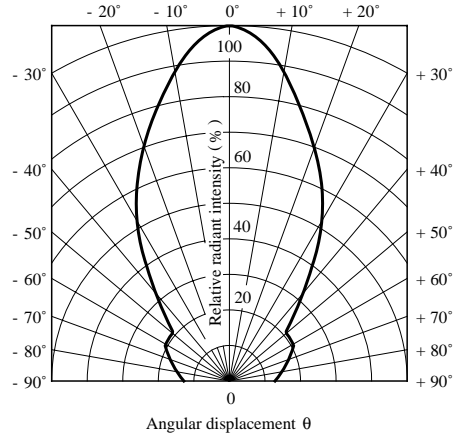

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.