
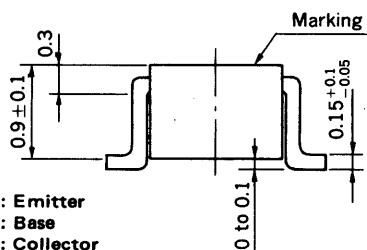



**MEDIUM SPEED SWITCHING**  
**RESISTOR BUILT-IN TYPE NPN TRANSISTOR**

**PACKAGE DIMENSIONS**  
in millimeters

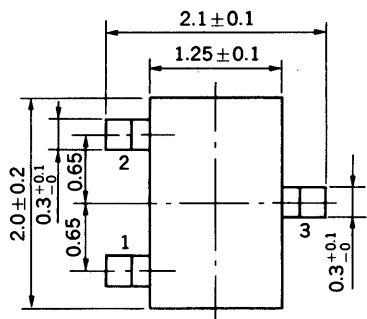

**FEATURES**

- Resistor Built-in TYPE

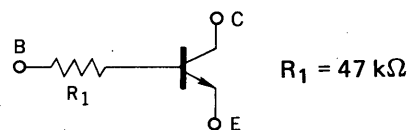

- Complementary to GN1L4Z

**ABSOLUTE MAXIMUM RATINGS**

Maximum Voltages and Currents ( $T_a = 25^\circ\text{C}$ )

Collector to Base Voltage	$V_{CB0}$	60	V
Collector to Emitter Voltage	$V_{CE0}$	50	V
Emitter to Base Voltage	$V_{EBO}$	5	V
Collector Current (DC)	$I_C$	100	mA
Collector Current (Pulse)	$I_C$	200	mA
Maximum Power Dissipation			
Total Power Dissipation			
at $25^\circ\text{C}$ Ambient Temperature	$P_T$	150	mW
Maximum Temperatures			
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-55 to +150	$^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ )**







CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Collector Cutoff Current	$I_{CBO}$			100	nA	$V_{CB} = 50\text{ V}, I_E = 0$
DC Current Gain	$h_{FE1}^*$	135	270	600		$V_{CE} = 5.0\text{ V}, I_C = 5.0\text{ mA}$
DC Current Gain	$h_{FE2}^*$	100	260			$V_{CE} = 5.0\text{ V}, I_C = 50\text{ mA}$
Collector Saturation Voltage	$V_{CE(sat)}^*$		0.05	0.2	V	$I_C = 5.0\text{ mA}, I_B = 0.25\text{ mA}$
Low-Level Input Voltage	$V_{IL}^*$		0.57	0.5	V	$V_{CE} = 5.0\text{ V}, I_C = 100\ \mu\text{A}$
High-Level Input Voltage	$V_{IH}^*$	4.0	1.7		V	$V_{CE} = 0.2\text{ V}, I_C = 5.0\text{ mA}$
Input Resistor	$R_1$	32.9	47.0	61.1	k $\Omega$	
Turn-on Time	$t_{on}$			0.2	$\mu\text{s}$	$V_{CC} = 5\text{ V}, V_{in} = 5\text{ V}$
Storage Time	$t_{stg}$			5.0	$\mu\text{s}$	$R_L = 1\text{ k}\Omega$
Turn-off Time	$t_{off}$			6.0	$\mu\text{s}$	$PW = 2\ \mu\text{s}, \text{Duty Cycle} \leq 2\%$

\* Pulsed:  $PW \leq 350\ \mu\text{s}$ , Duty Cycle  $\leq 2\%$


**$h_{FE}$  Classification**

Marking	L61	L62	L63
$h_{FE1}$	135 to 270	200 to 400	300 to 600


TYPICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ )

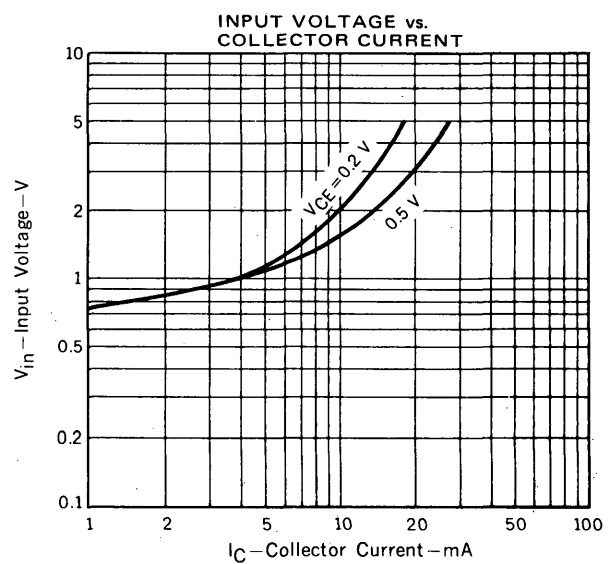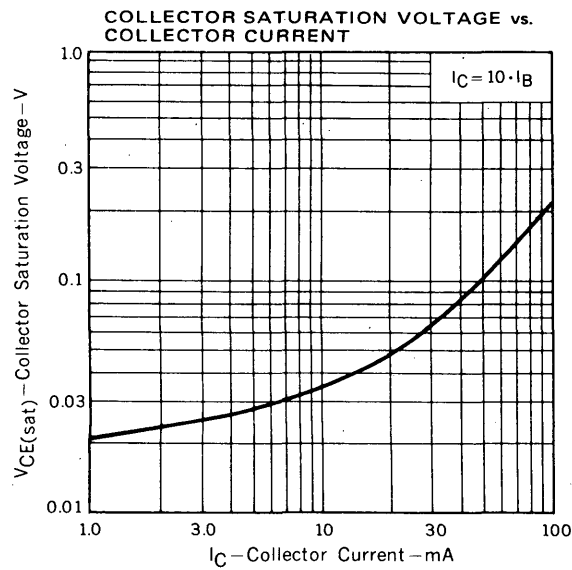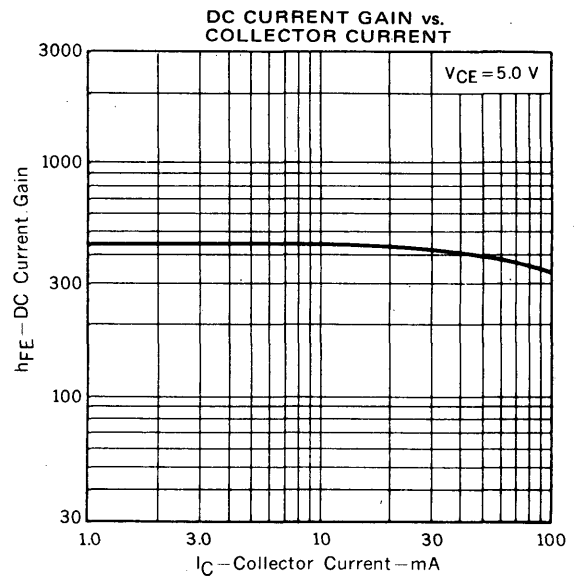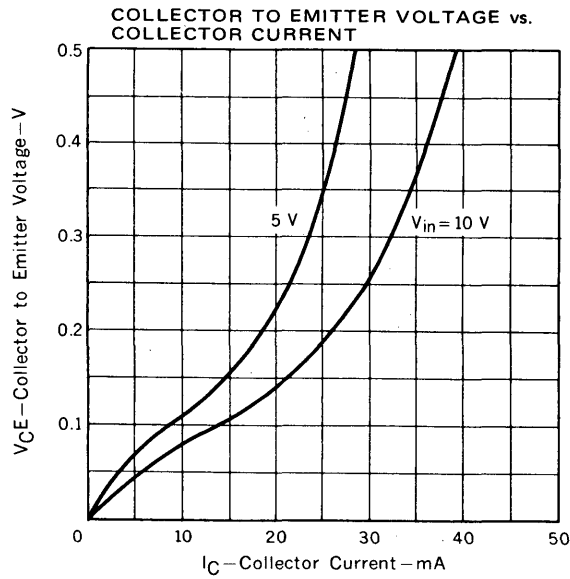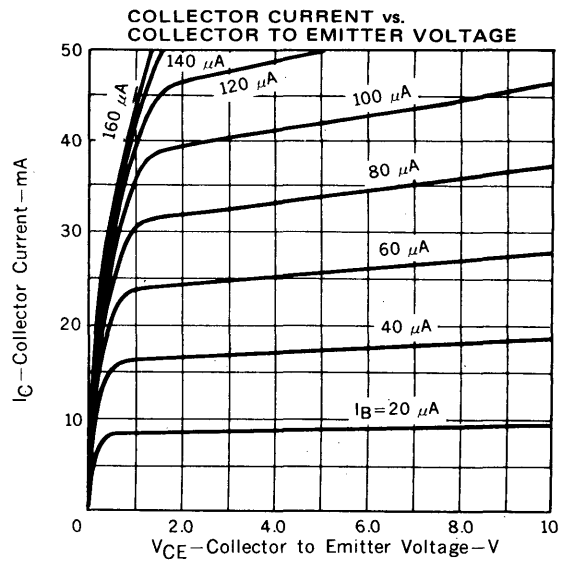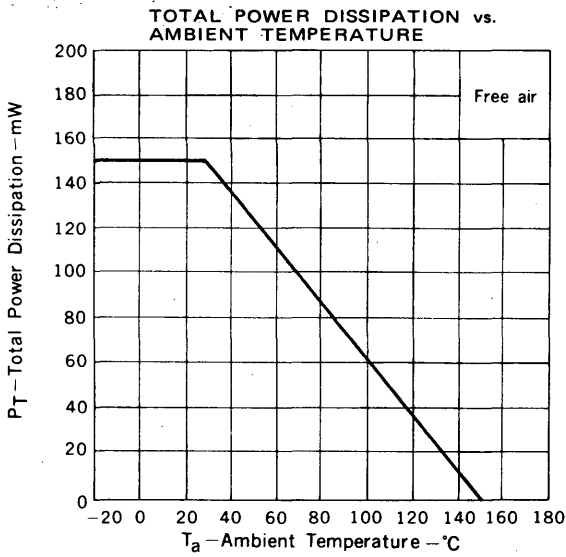

COLLECTOR CURRENT vs. INPUT VOLTAGE

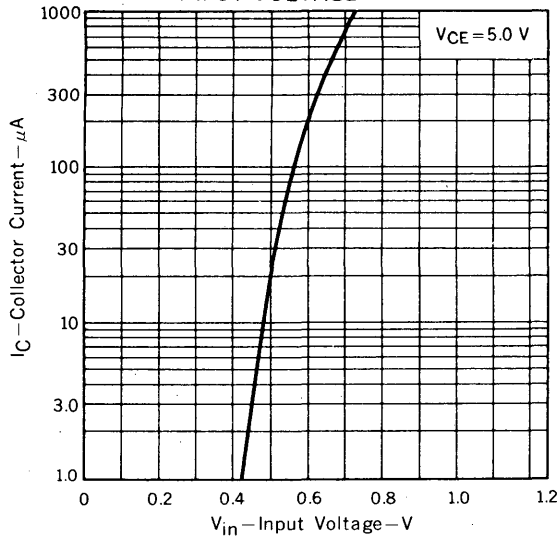

RESISTOR vs. AMBIENT TEMPERATURE

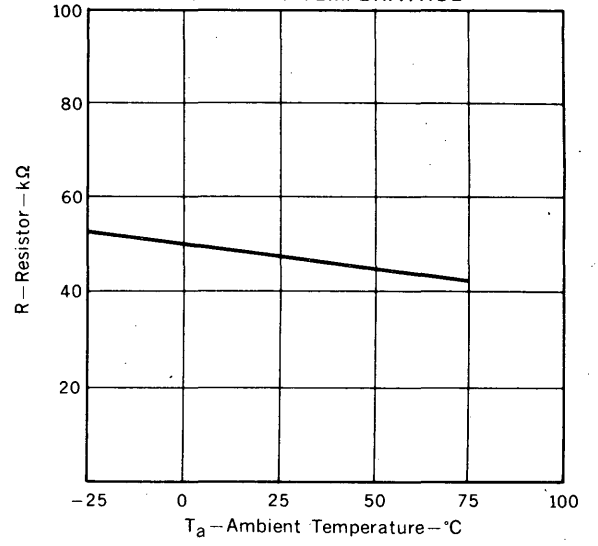





LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.